






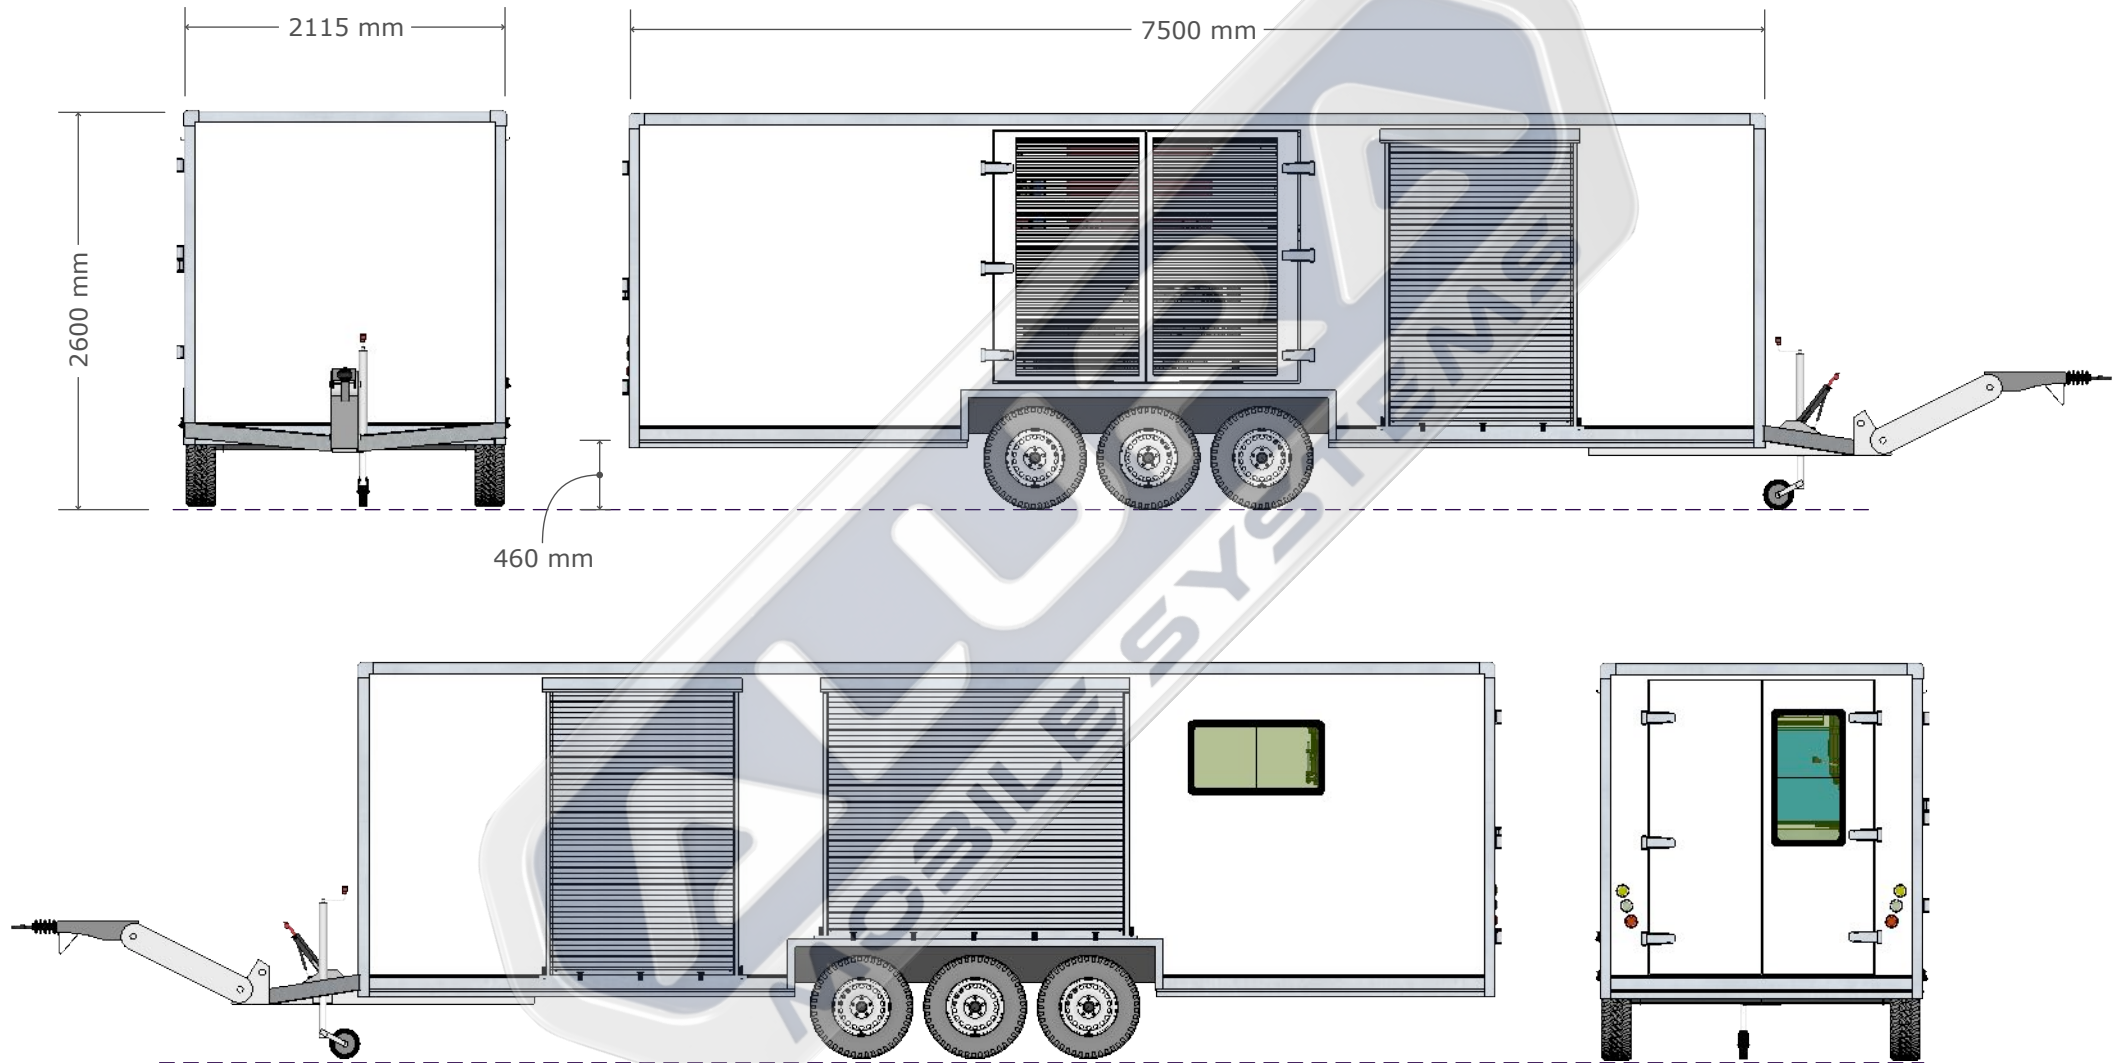

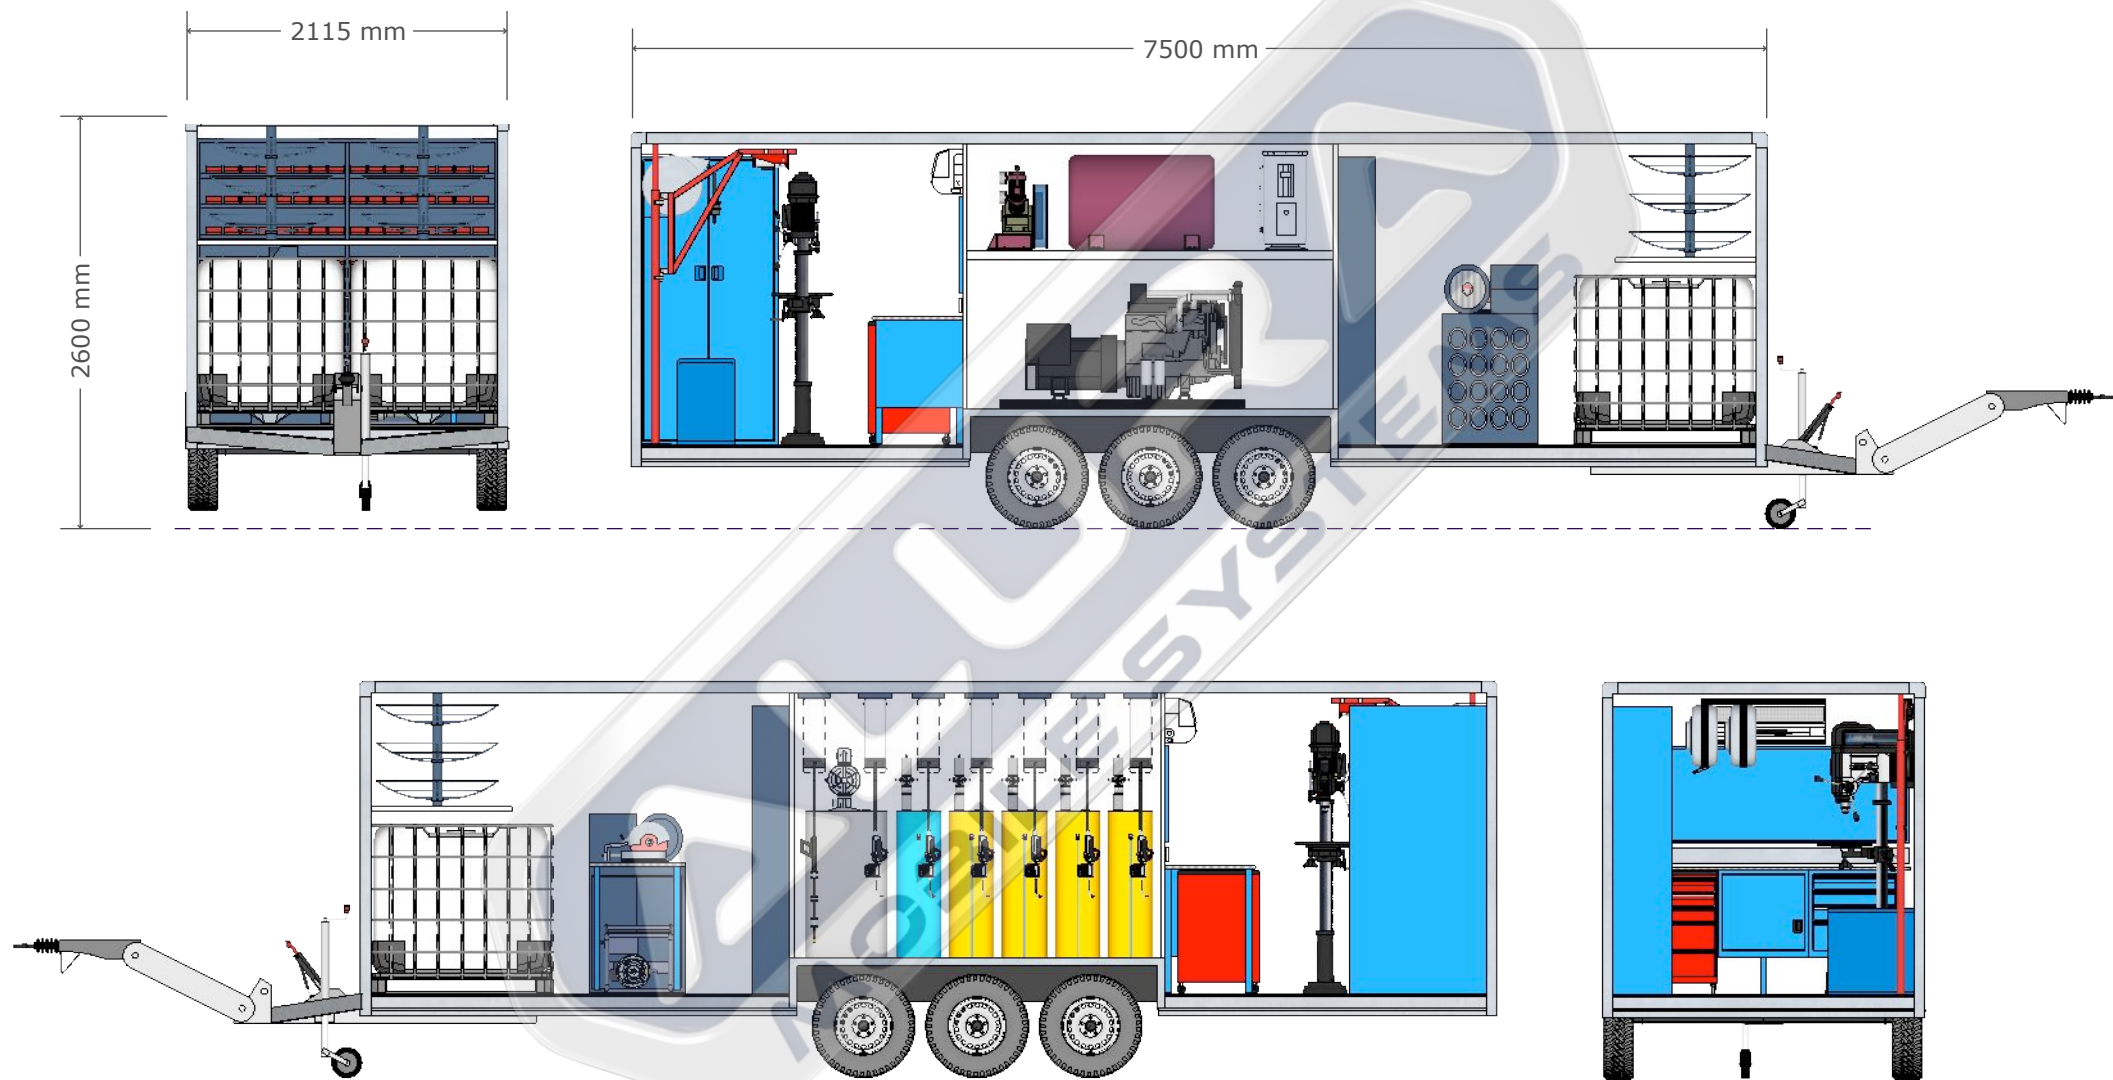


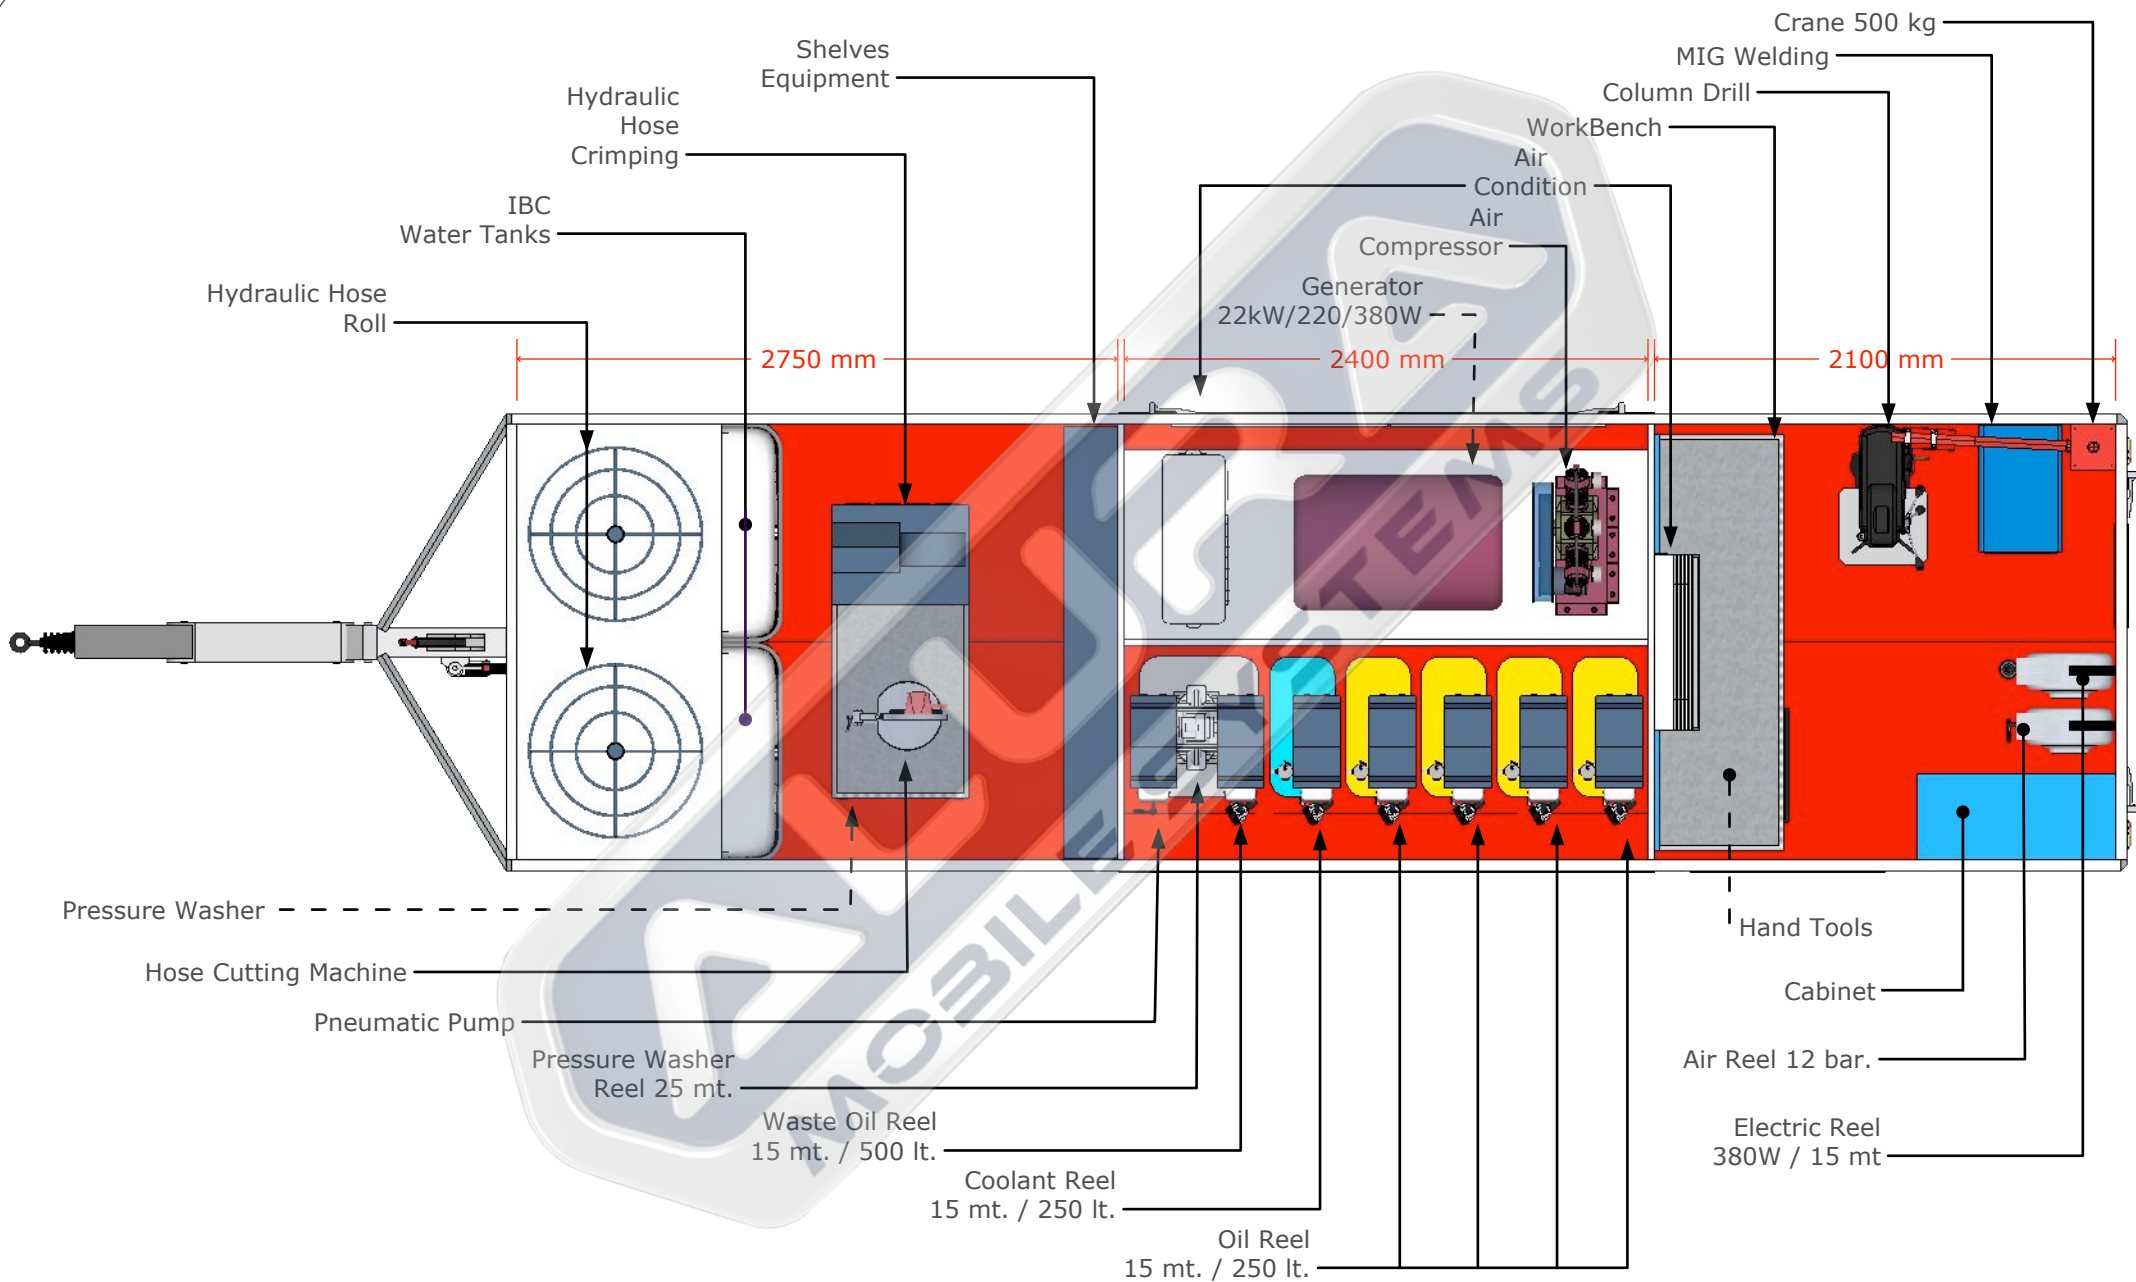


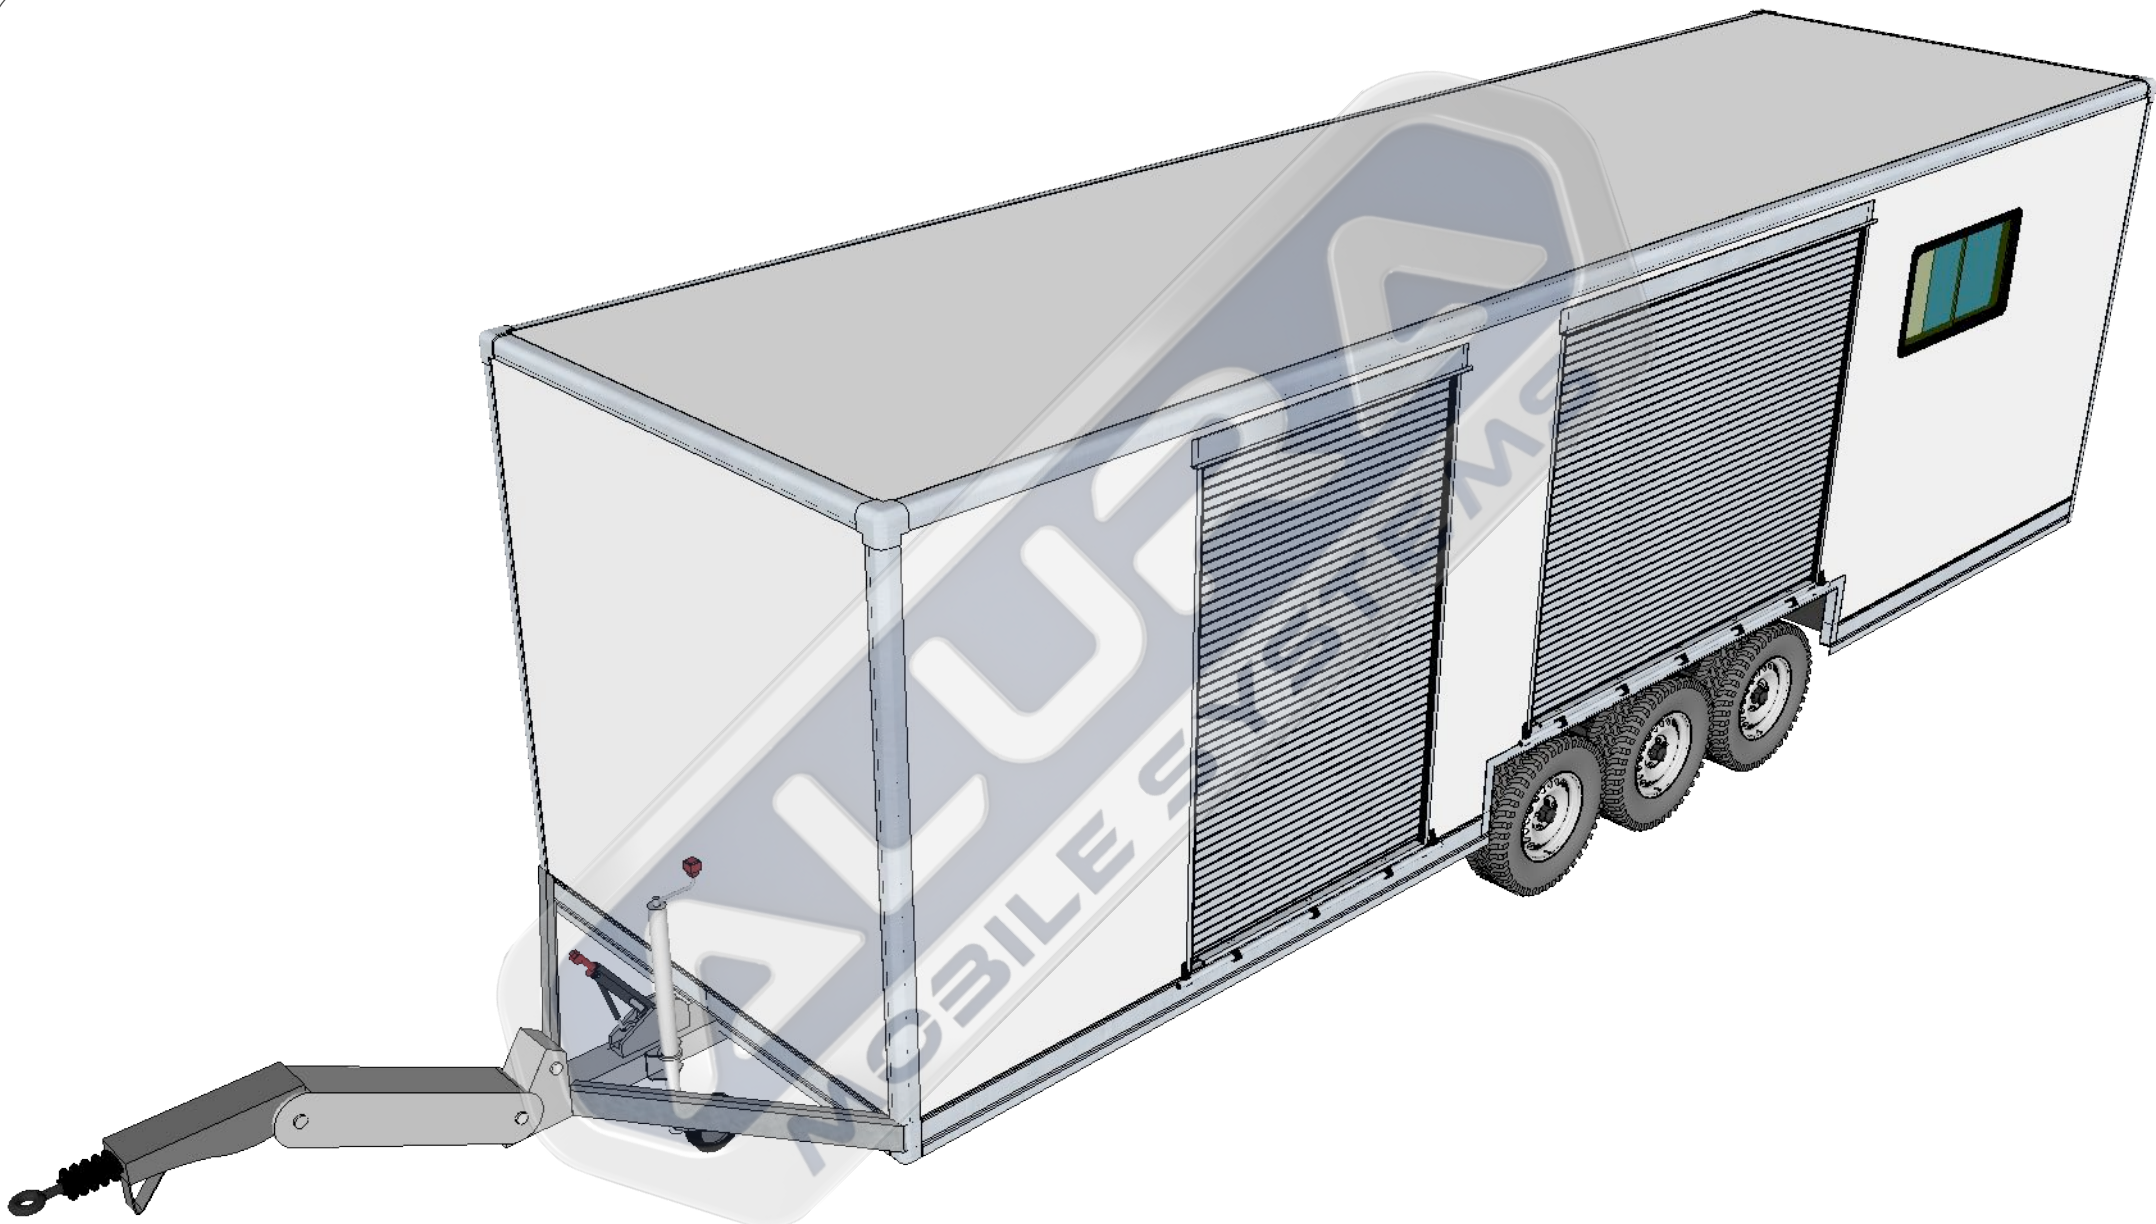


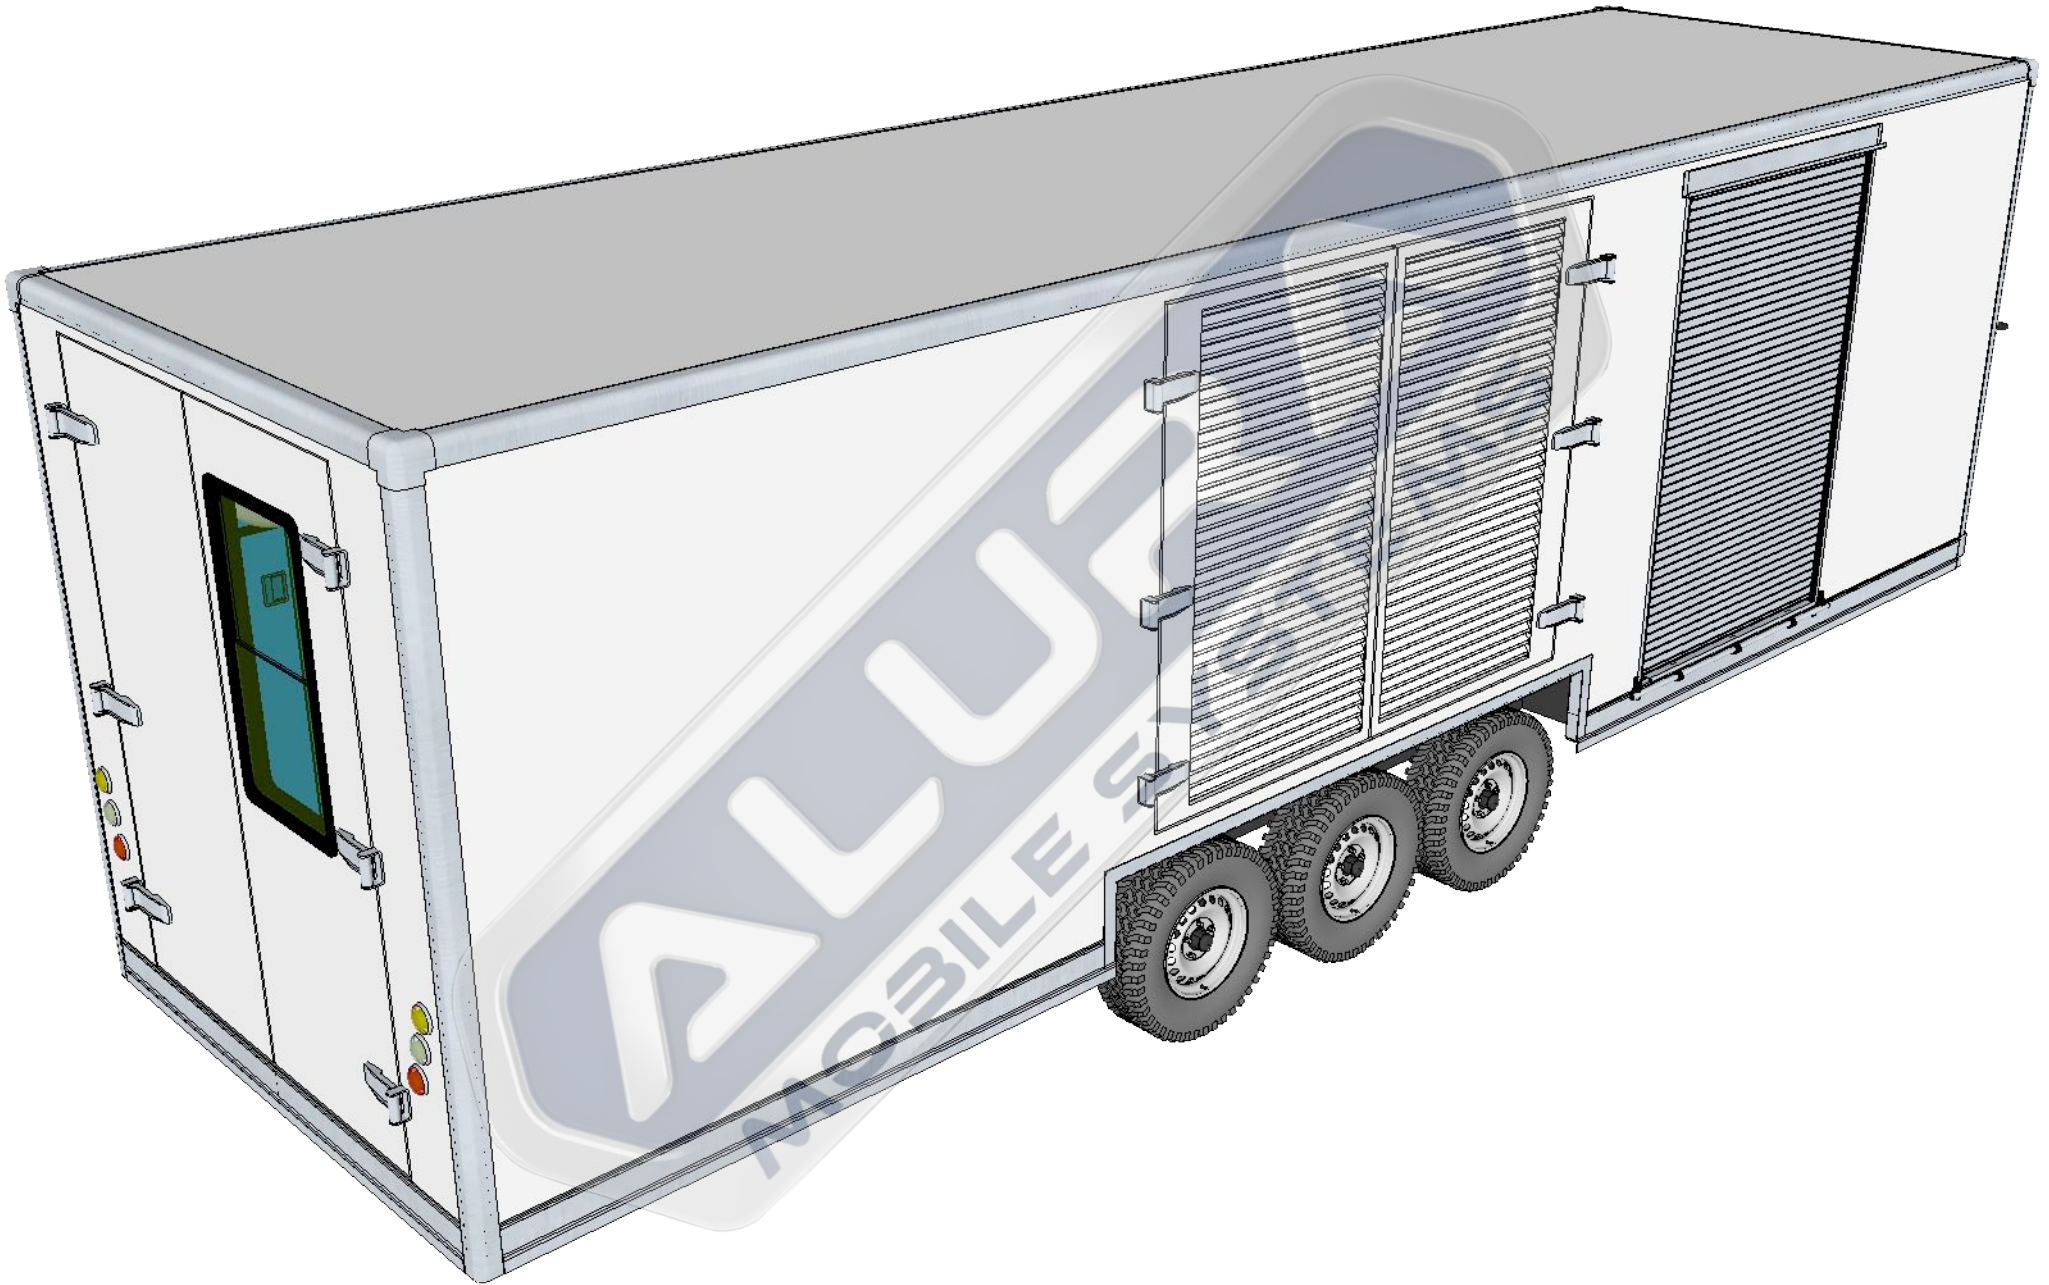






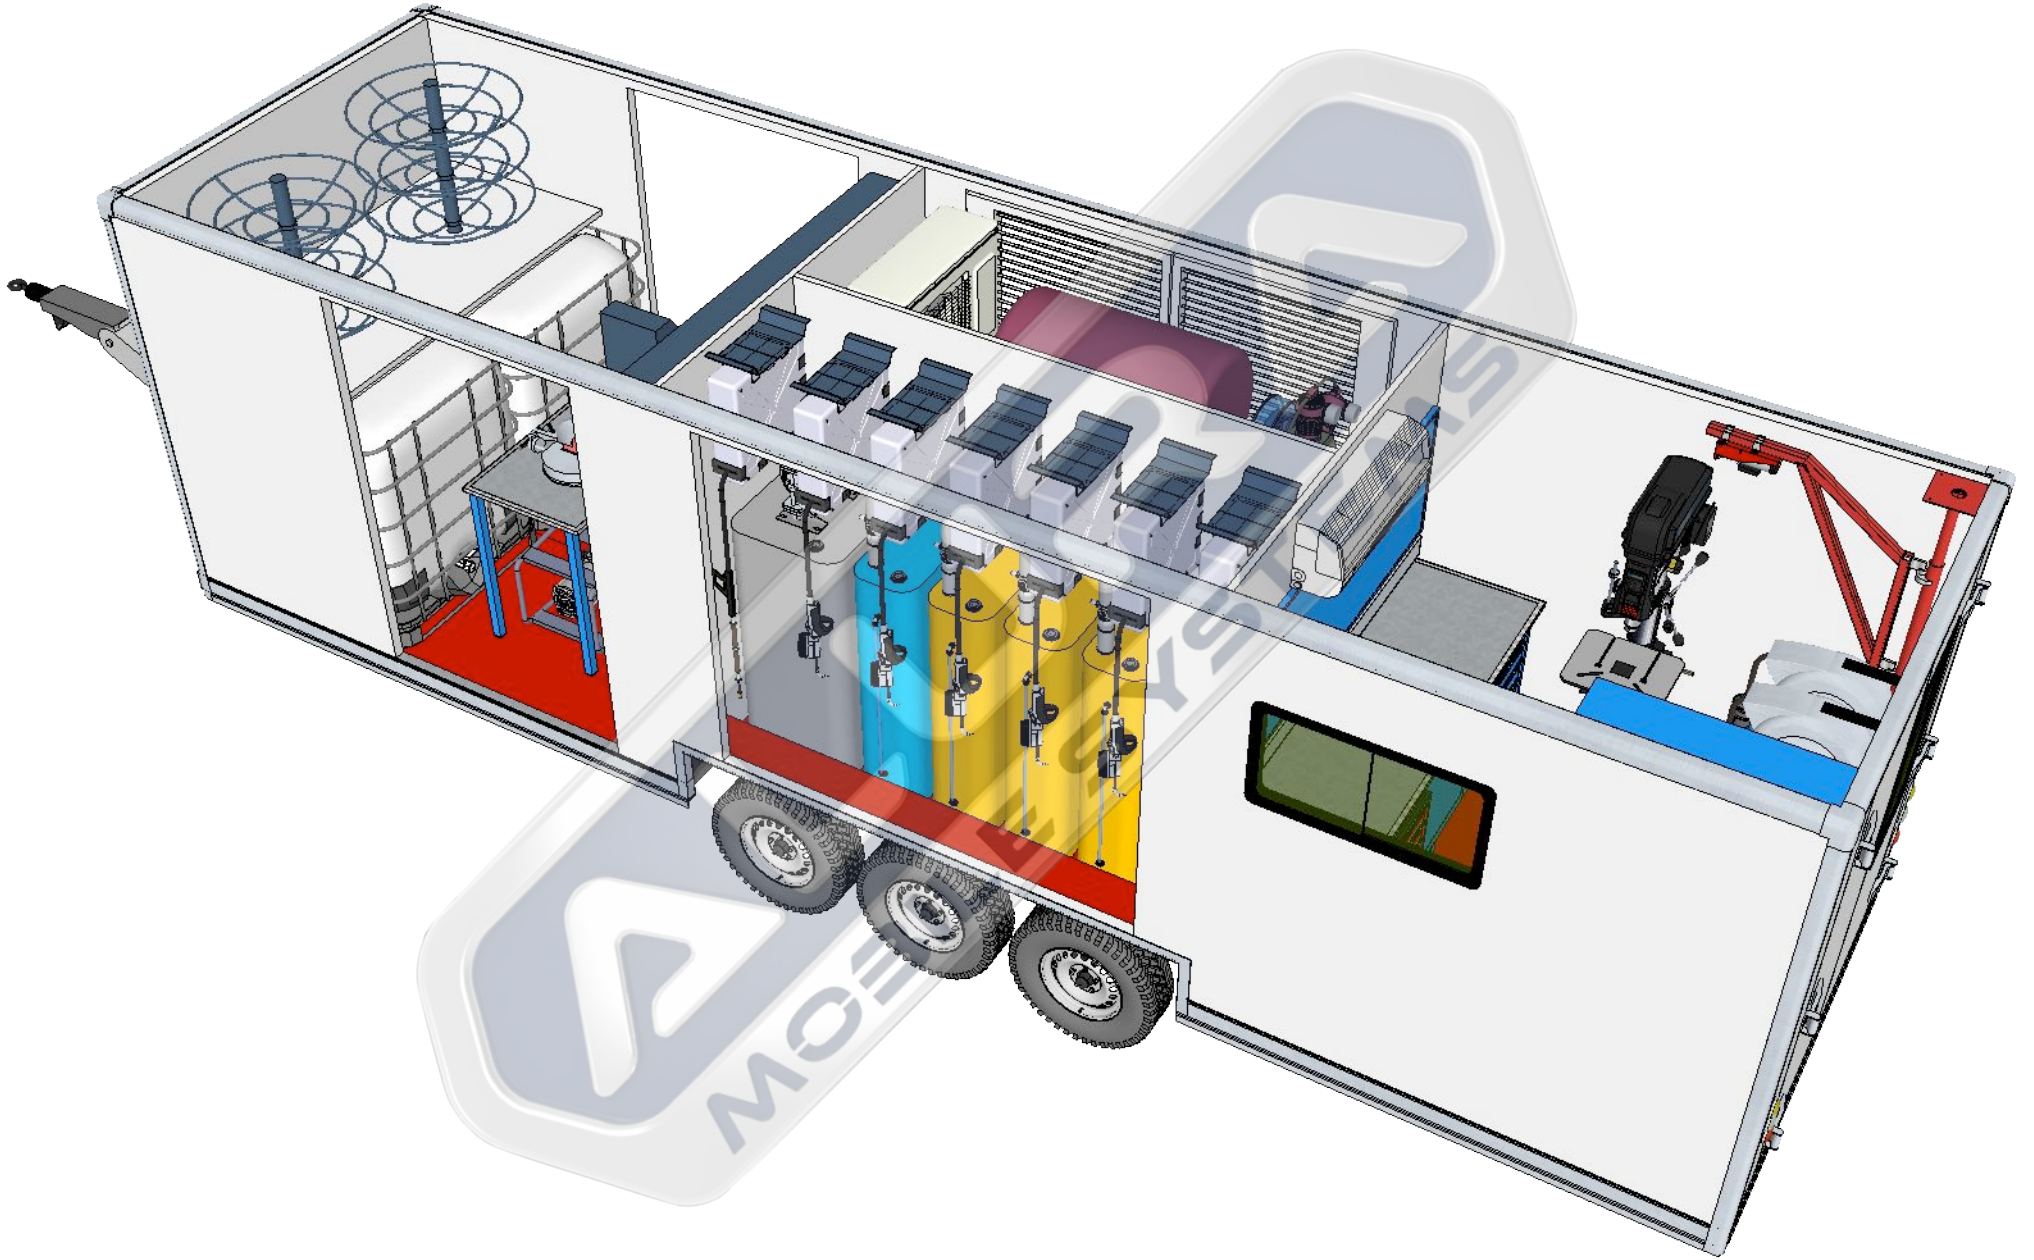


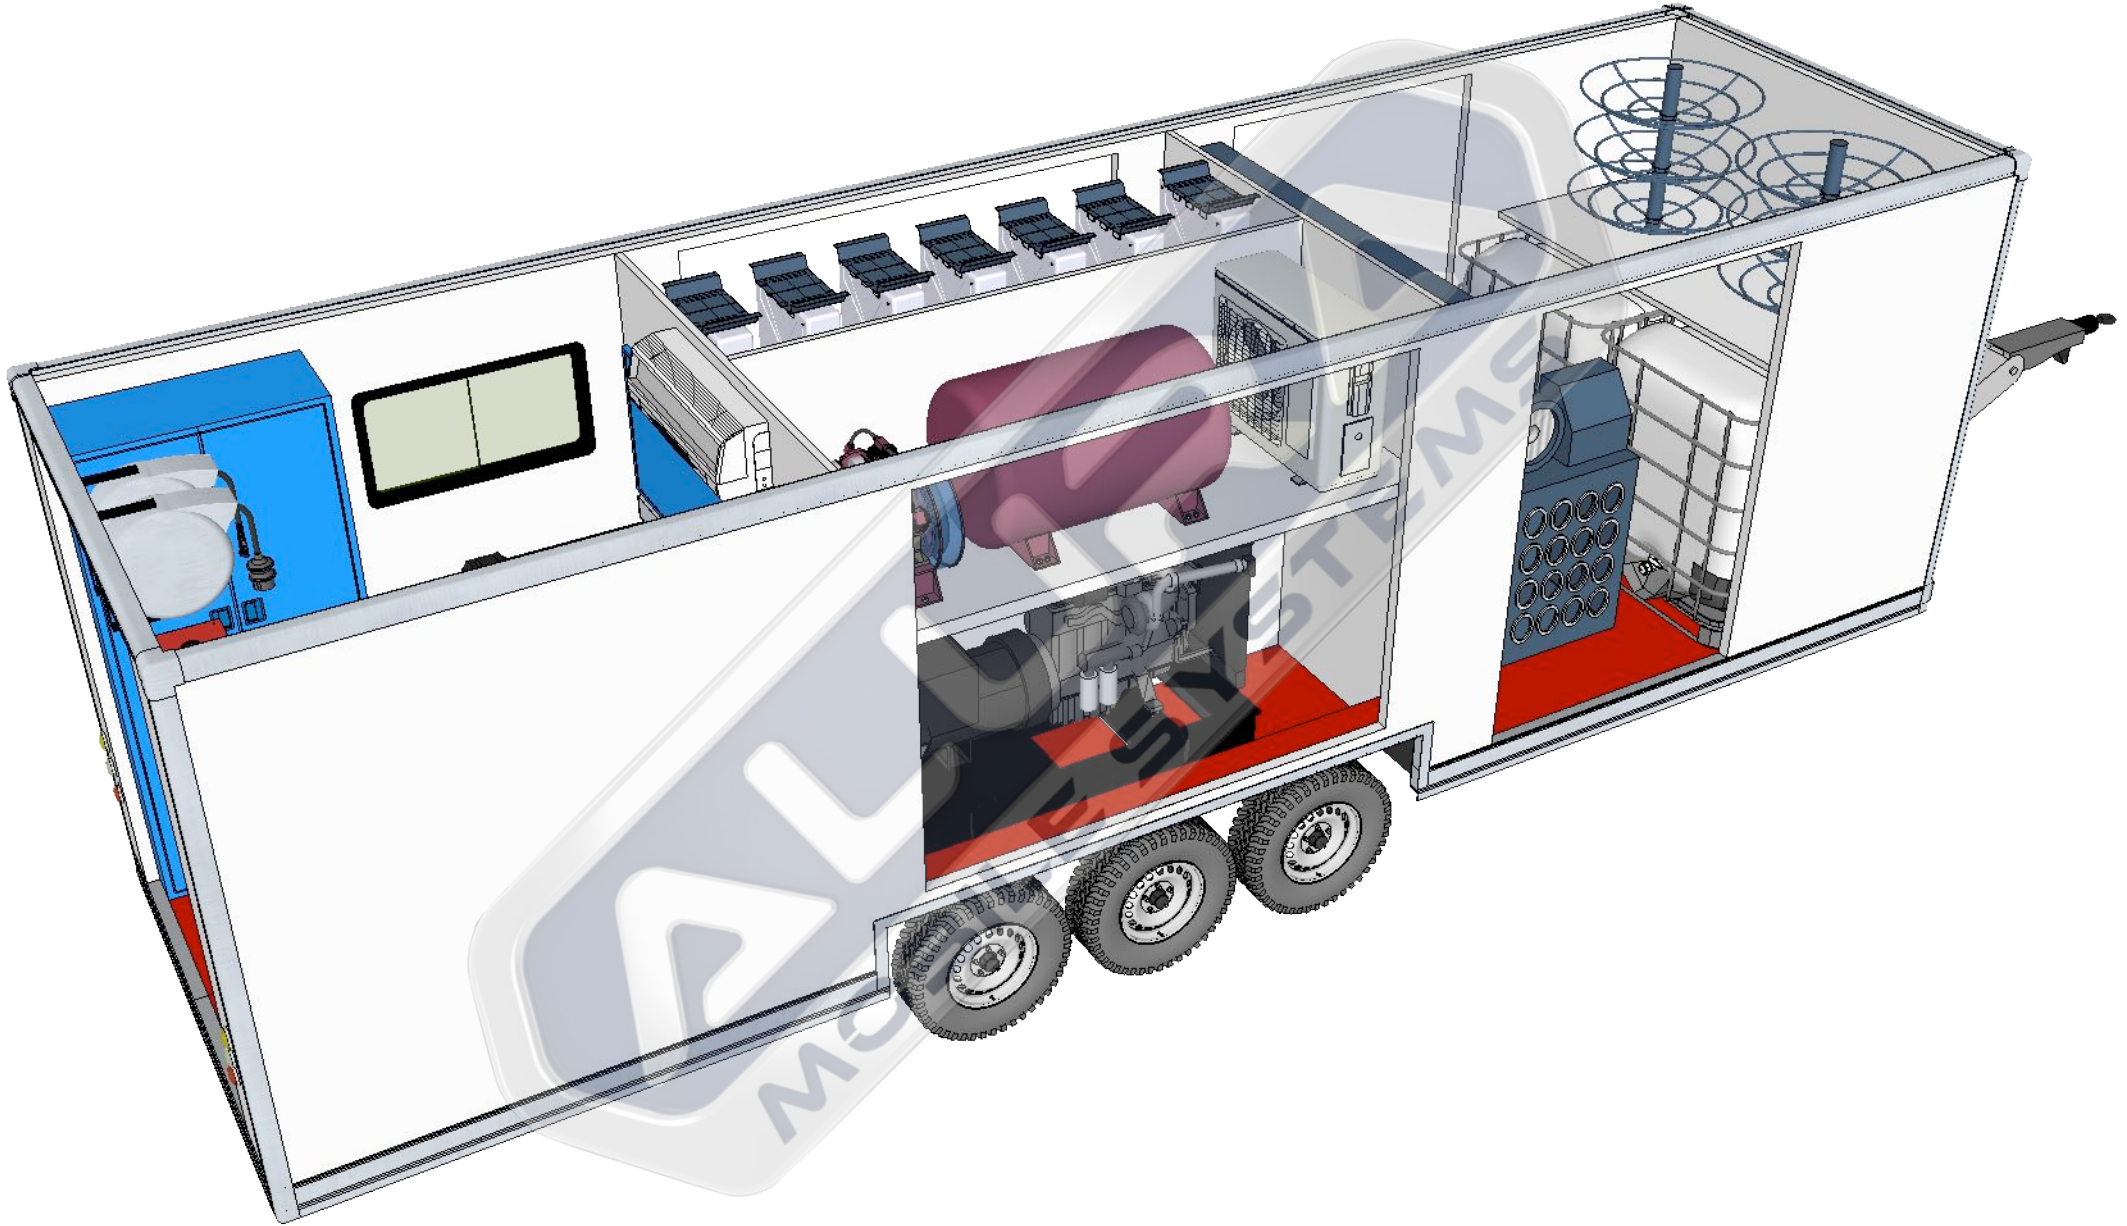

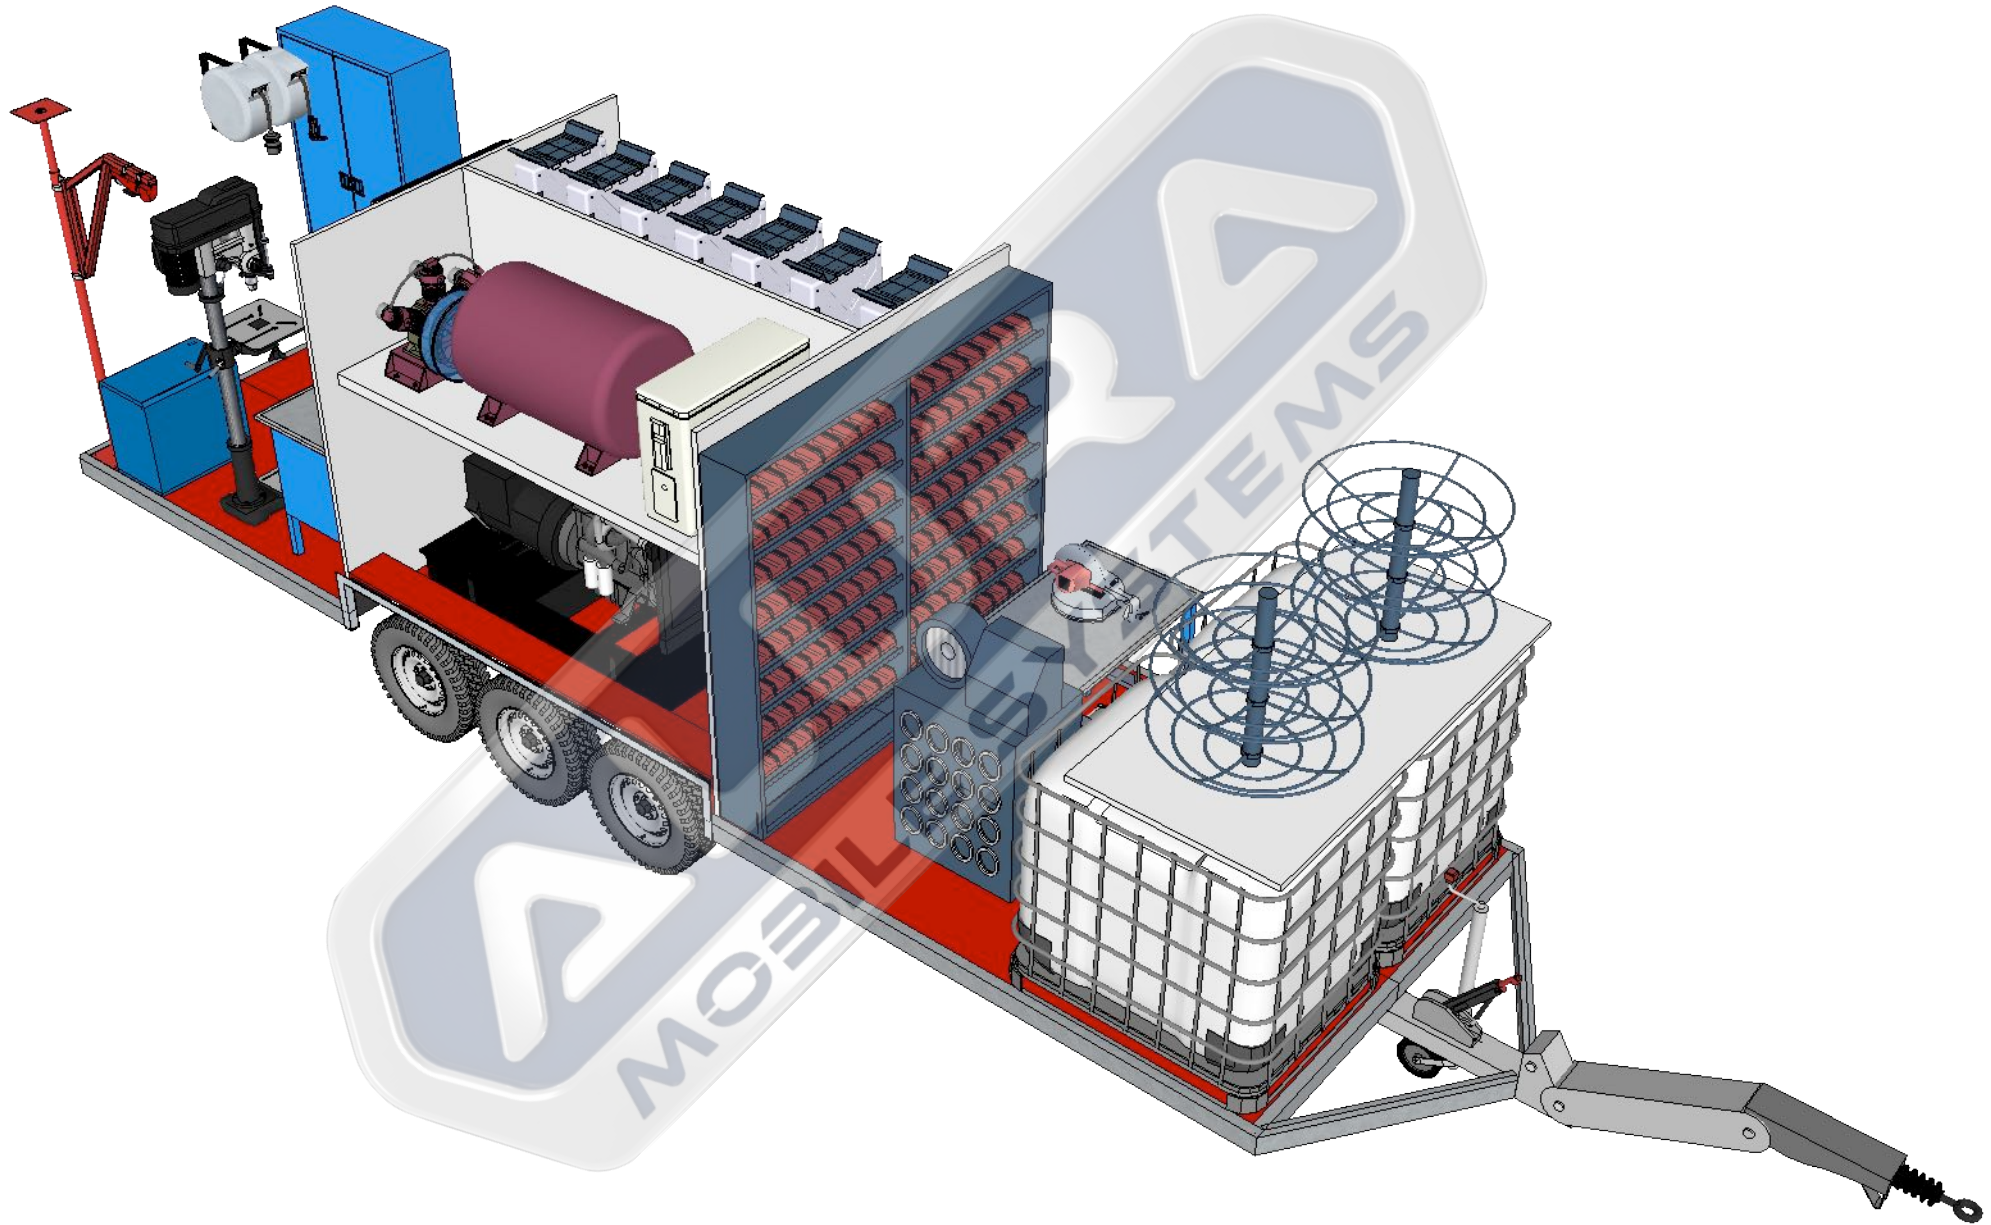

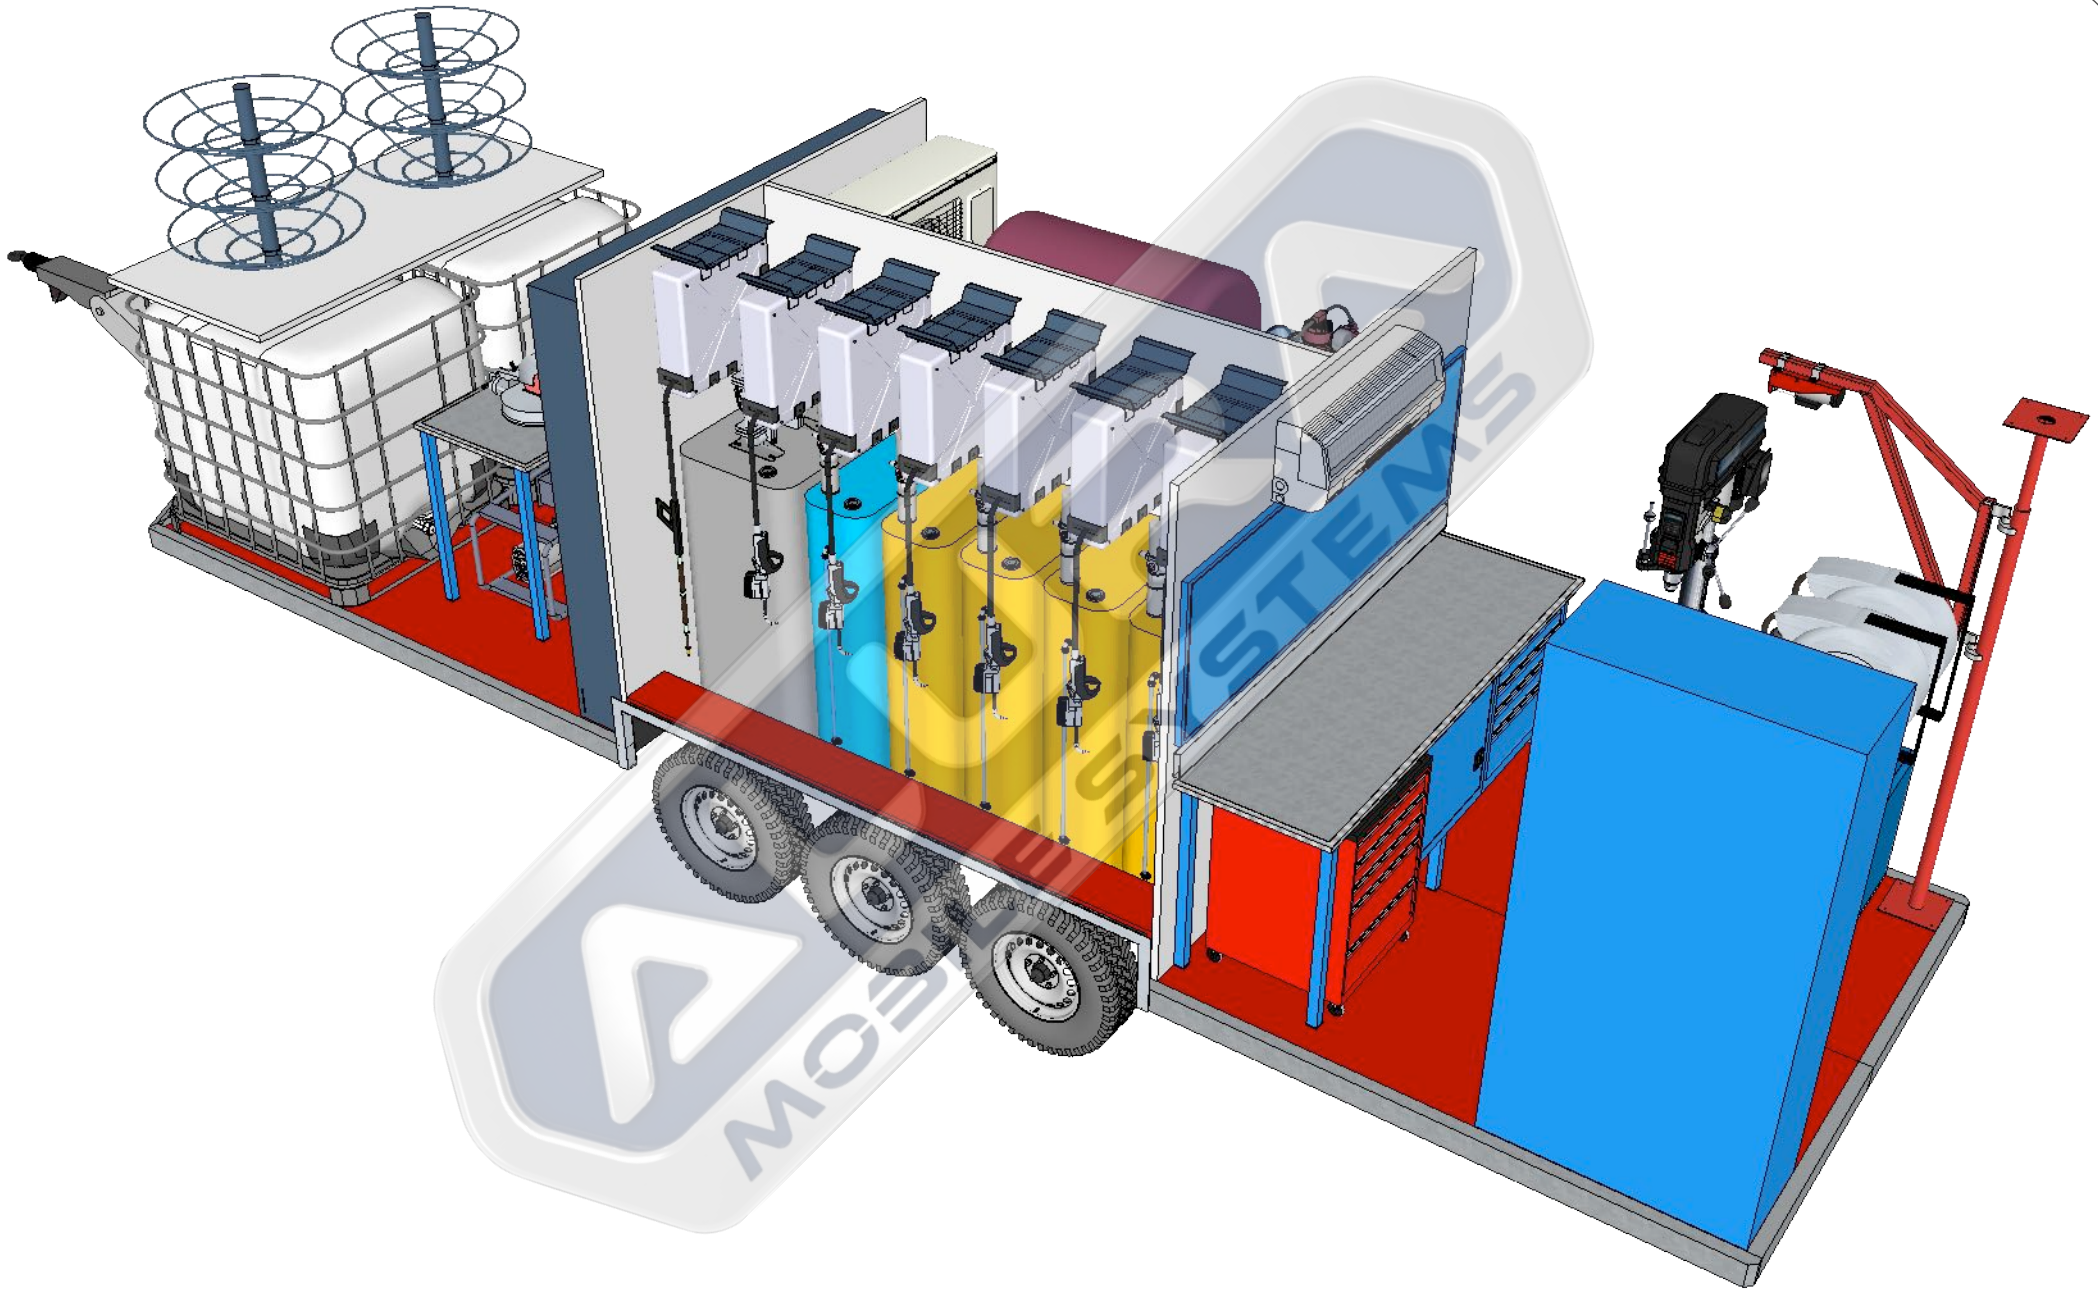


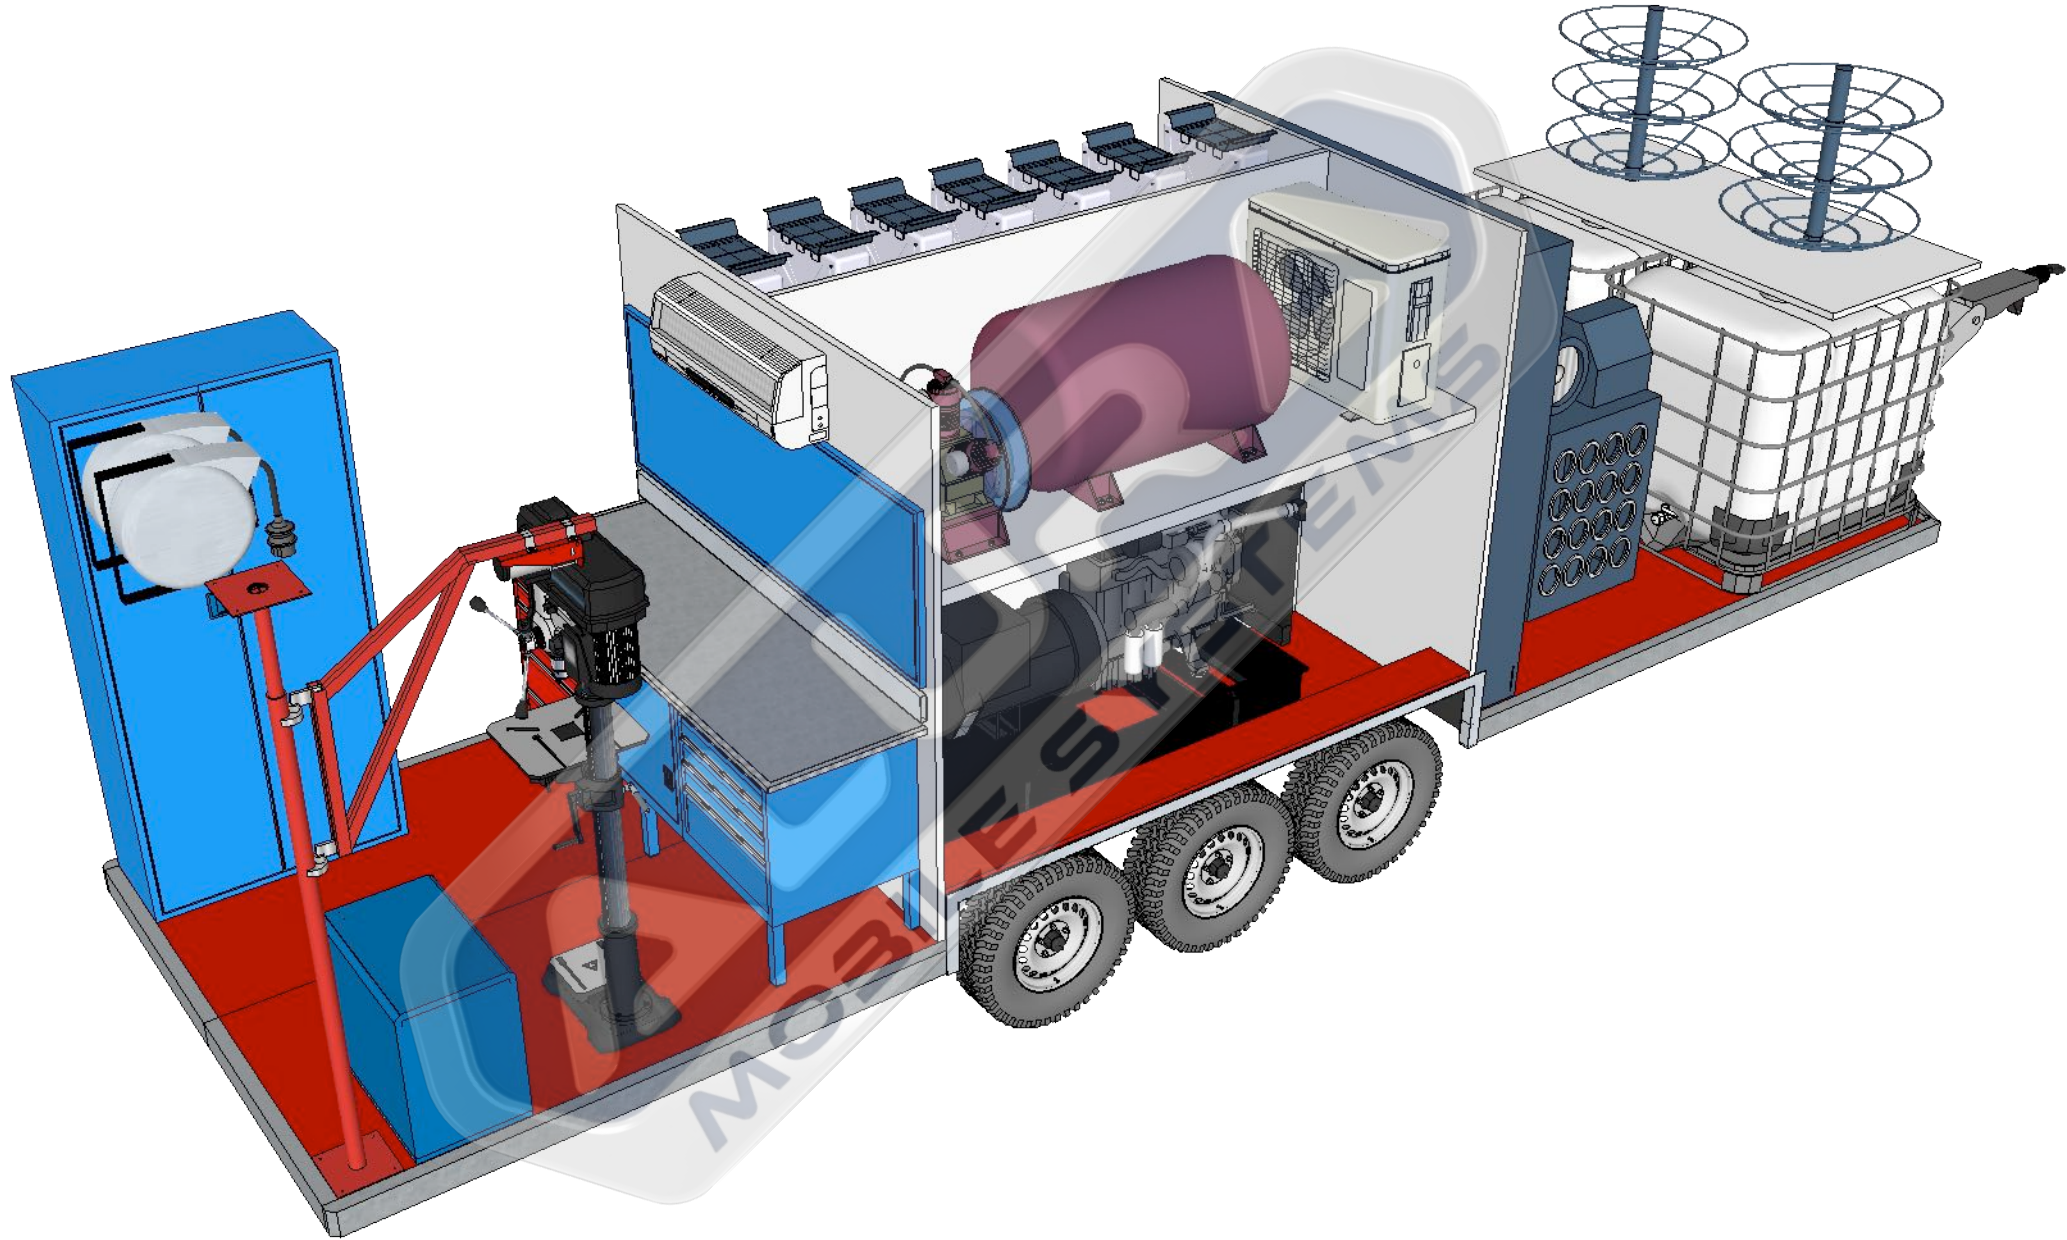

No	Equipment	Explanation	Producer	Orjin	Piece
1	Body Work Trailer		Alura	Turkey	1
		L / H / W: 7,500x2,600x2,115 mm Multi-wing tri-axle towbar trailer. Mechanical handbrake, torsion axles. Side LED trailer lighting system. Trailer chassis made of ST37 steel. Towing hitch height is adjustable.	6 Pcs. TT 7.50 - 16 C PA30 Tires. 80 Km/H Max. speed stickers will be on the trailer. Total weight: 4,500 kg Industrial coating chassis.		
2	Aluminum Shutters		Alura	Turkey	4
		Manuel Working Locking Systems Size : 1250 x 2300 mm 2 pcs. 2000 x 2300 mm 1 pcs.			
3	Generator Diesel		Power	Turkey	1
		Standby/Prime Power: 22 kVa / 23 kVa Standard Voltage: 400/230 V / 3 Phase Engine Bran: Perkins Engine Model: 1103A-33TG1 Alternator: Sincron RPM: 1500 rpm.	Frequency: 50 Hz. Water Cooling		
4	Pistone Compressor		Aykom	Turkey	1
		Chassis Piston Air Compressor Engine Power: 5.5 hp Air Intake: 630 lt/min Revolution : 950 rpm Pressure : 12 bar Working Power : 380 V			
5	Air Tank		Alura	Turkey	1
		Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Connection : 1" Air Outlet : 1/2"			
6	Work Bench		Alura	Turkey	1
		Work Bench Width: 1.800 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg.	Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Electrostatic powder paint Suspension boards modular		

No	Equipment	Explanation	Producer	Orjin	Piece
7	Metal Cabinet		Alura	Turkey	1
		WxDxH: 1.000 x 450 x 2.000 mm Body and carriers 0.80 - 1.2 mm It is long-lasting and durable. The covers are double wing reinforced. Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg.	Variable drawer groups		
8	Metal Cabinet		Alura	Turkey	2
		Metal Cabinet Width: 1.000 mm Depth: 450 mm Height: 2000 mm Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg.	Variable drawer groups Body and carriers 0.80 - 1.2 mm sheet metal It is long-lasting and durable. The covers are double wing reinforced."		
9	Air Conditioning		Samsung	Kore	1
		Cooling Capacity : 16.000 btu Input Voltage : 220 V - 50 Hz Current Cooling : 6.3 / 6.9 A Required Fuse : 7 A Thermostatic Heat Control Yes Refrigerant : R410a			
10	Oil Pumps		Raasm	Italy	4
		Pneumatic pumps for oil Flow rate: 18 l / min Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE			
11	Hose Reels		Raasm	Italy	4
		Pressure: 150 bar Length: 25 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			
12	Guns for dispensing		Raasm	Italy	4
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			

No	Equipment	Explanation	Producer	Orjin	Piece
13	Oil Tank		Alura	Turkey	4
		Capacity : 250 Ltr Made of Aluminum Level Indicator Filling tap Pump stabilizer 1" Discharging valve			
11	Antifreeze Poup		Raasm	Italy	1
		Pneumatic pumps for Antifreeze Flow rate: 30 l / min Air inlet - Fluid Out : G 1/4 - G 1/2 Air working pressure: 6/8 bar Average air consumption: 370 l / min	Noise level: 81 dB Weight : 7,4 kg		
12	Antifreeze Hose Reels		Raasm	Italy	1
		Pressure: 150 bar Hose Length: 15 mt Compatible fluids: Antifreeze Material: Painted Steel Inlet-Outlet : G 1/2 "f - G 1/2 "m Operating temperature: -40 / +100	Pressure - Size: 1/2 " - 160 bar		
13	Guns for dispensing		Raasm	Italy	1
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
14	Antifreeze Tank		Alura	Turkey	1
		Capacity : 250 Ltr Made of Aluminum Level Indicator Filling tap Pump stabilizer 1" Discharging valve			
15	Waste Oil / Diagram Pump		Raasm	Italy	1
		Diaphragm Pumps Flow rate: 70 l / min Max pressure: 8 bar. Max cicles for minute: 400 cpm. Max working temperature: 100 ° C Noise level: 70 dB	Air working pressure: 2/6 Bar Membranes: EPDM		

No	Equipment	Explanation	Producer	Orjin	Piece
16	Waste Oil / Hose Reel		Raasm	Italy	1
		Pressure: 20 bar Length: 25 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			
17	Waste Oil Tank		Alura	Turkey	1
		Capacity : 500 Ltr Made of Aluminum Level Indicator Filling tap Pump stabilizer 1" Discharging valve			
18	Cold Washing Machine		Alura	Turkey	1
		Pressure: 200 bar Flow rate: 900 lt/hour Engine Power: 7.5 hp Voltage - Phase 380V-3 50 Hz Weight: 74 Spray gun			
19	Washing Hose Reels		Alura	Turkey	1
		Pressure: 200 bar. Hose Length: 25 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel			
20	Water Pump		Karcher	Germany	1
		Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Connection type : G1	Power Cable H05RN-F : 1 m Weight without accessories : 14.7 kg		
21	Water Hose Reel		Karcher	Germany	1
		Pressure: 20 bar. Compatible fluids: Water Swivel joint: Stainless Metal Seals: Polyurethane Characteristic: Fixed Inlet: G 1/2 "" (f)	Outlet: G 1/2 ""(g) Operating temperature -40 C / +80 C Size: 1/2 "" Pressure: 10 bar Length: 20 mt		

No	Equipment	Explanation	Producer	Orjin	Piece
22	Water Tank		NOBE	Turkey	2
		Plastic Tracked Ibc Tank Capacity: 1.000 lt. / 275 gr. Usage Area: Liquid product storage Weight: 60 kg. Size: 1.200x1.000x1.160 mm Feature: Galvanized, welded steel mesh			
23	Cable Roller		Mavel	Italy	1
		20 Mt 5*1.5 Mm Three Phase : 220 Volt Cable Thickness: 5*1.5 Mm2 Cable Length: 20 Mt Cable Type : H07RN-F Power : 1000-3000 W	Auto Rewind Plastic outer cover steel swivel wall bracket Weight: 9 Kg Dimensions: 42x39x23 Cm		
24	Air Hose Roller		Mavel	Italy	1
		Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" F - 3/8" M Automatic Rewind Plastic outer casing	Steel rotating wall brake Size: 50x43.5x23.5 cm Weight: 8.3 Kg		
25	Air Regulator		Osaka	Japan	1
		Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temperature: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min			
26	Chain Hoist		Max Extra	Kore	1
		0,5 Tons 3 Meter Chain			
27	Lighting		EAT	Turkey	6
		Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Power: 28 W / 38 W / 55 W Input Voltage: 220-240V - IP 65			

No	Equipment	Explanation	Producer	Orjin	Piece
28	Outdoor Lighting		CSR	Turkey	6
		Operating Voltage / Current: DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS	White:5000-7000K Physical Properties : Polycarbonate plastic black aluminum profile		
29	Control panel of all equipment.		Alura	Turkey	1
		Control of all machines. Lighting control. Compressor Pressure gauge.			
30	MIG Welding Machine		Telwin	Italy	1
		Mains Voltage: 400 V. Mains Fuse: 16 A. Power Draw: 3 - 5.5 kW. Idle Working Voltage: 95 V. Current Adjust. Range: 10 - 240 A. Rated Current: 200 A - %20 A.	Electrode Diameter: 0.6 - 1.2 mm. Protection Class: IP 23 Dimensions: 795 x 375 x 730 mm Weight: 32 kg.		
31	Pro Series Workshop Trolley		İzeltaş	Turkey	1
		206 Pieces hand tools. SIZE: 470x670x1007 mm. Made of sheet metal. Electrostatic paint. 8 drawers, lockable.	Hand tools fixed in sponge channels.		
32	Combination Wrench		İzeltaş	Turkey	2
		Long Pattern Chrom vanadium Chrom plated TS3794 - TS ISO 7738 FORM A DIN 3113	5-6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-25-26-27-28-29-30-32-33-34-36-38-41-46-50		