




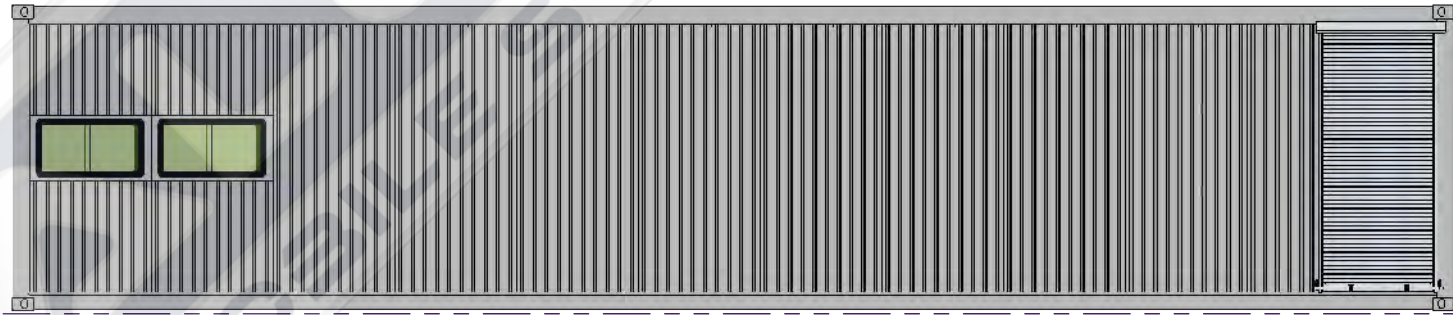




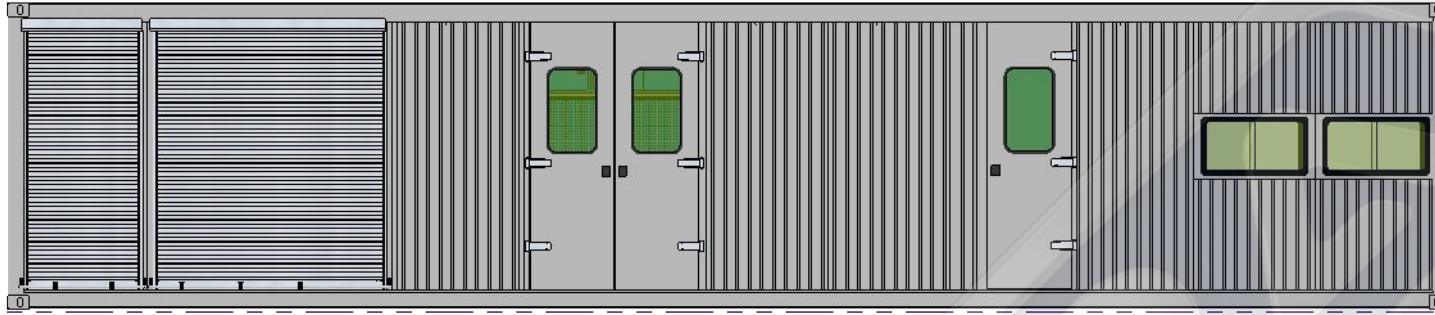


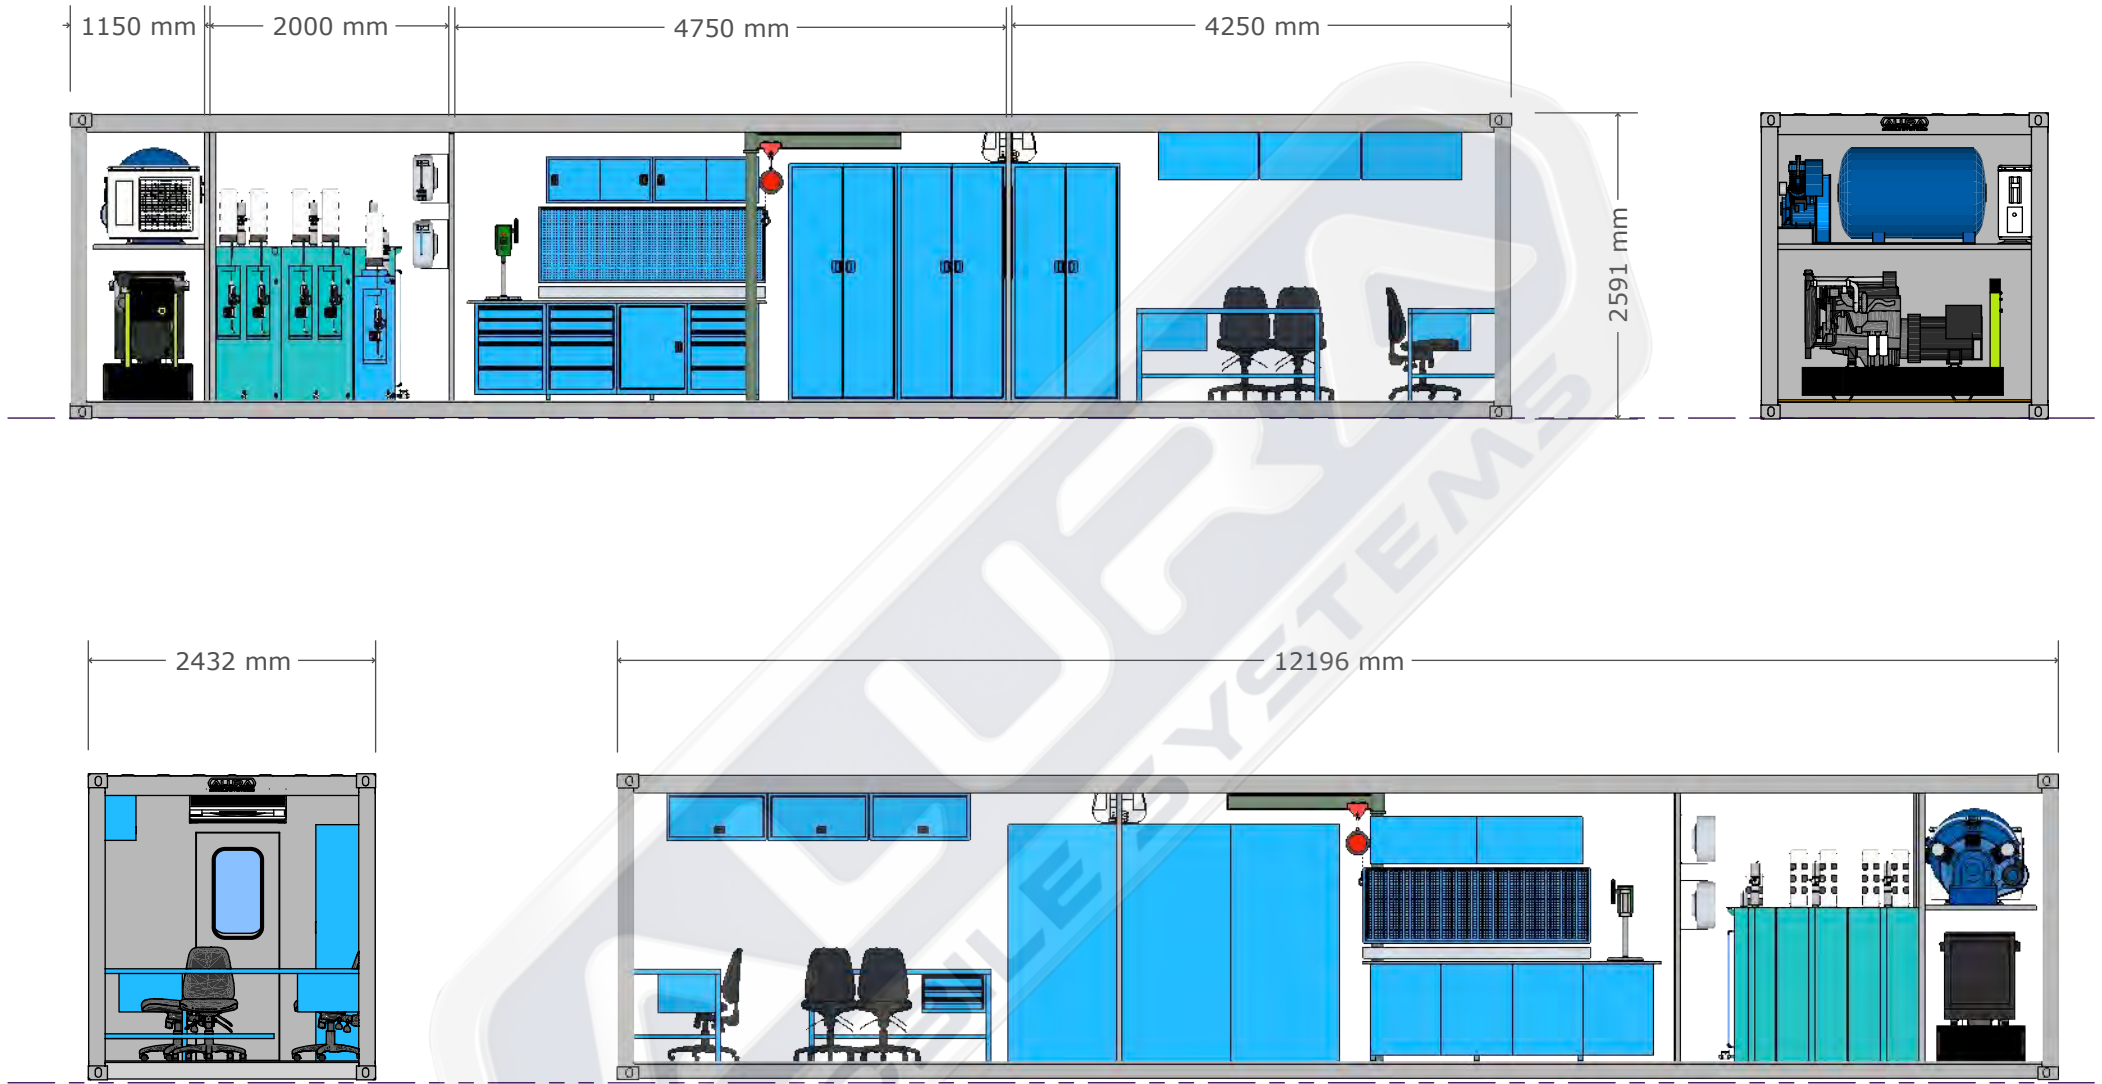


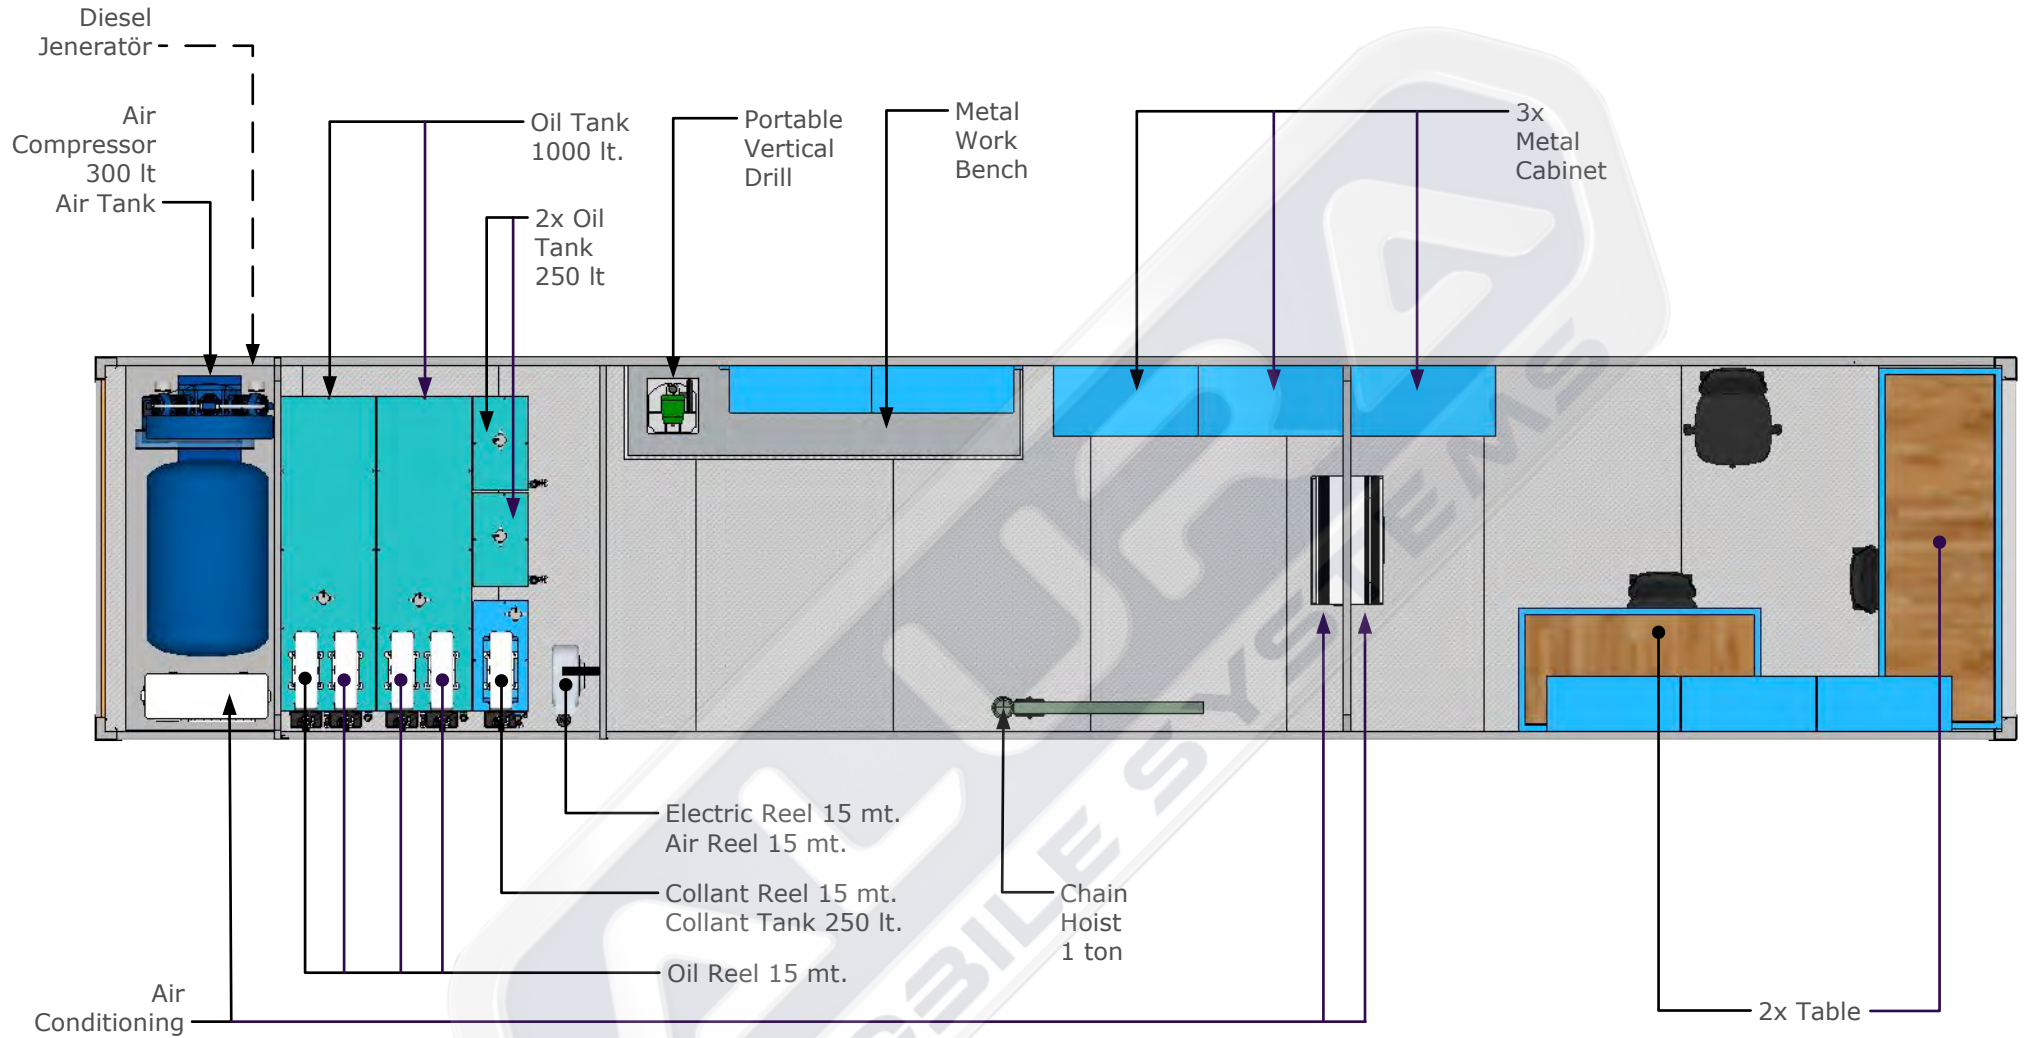


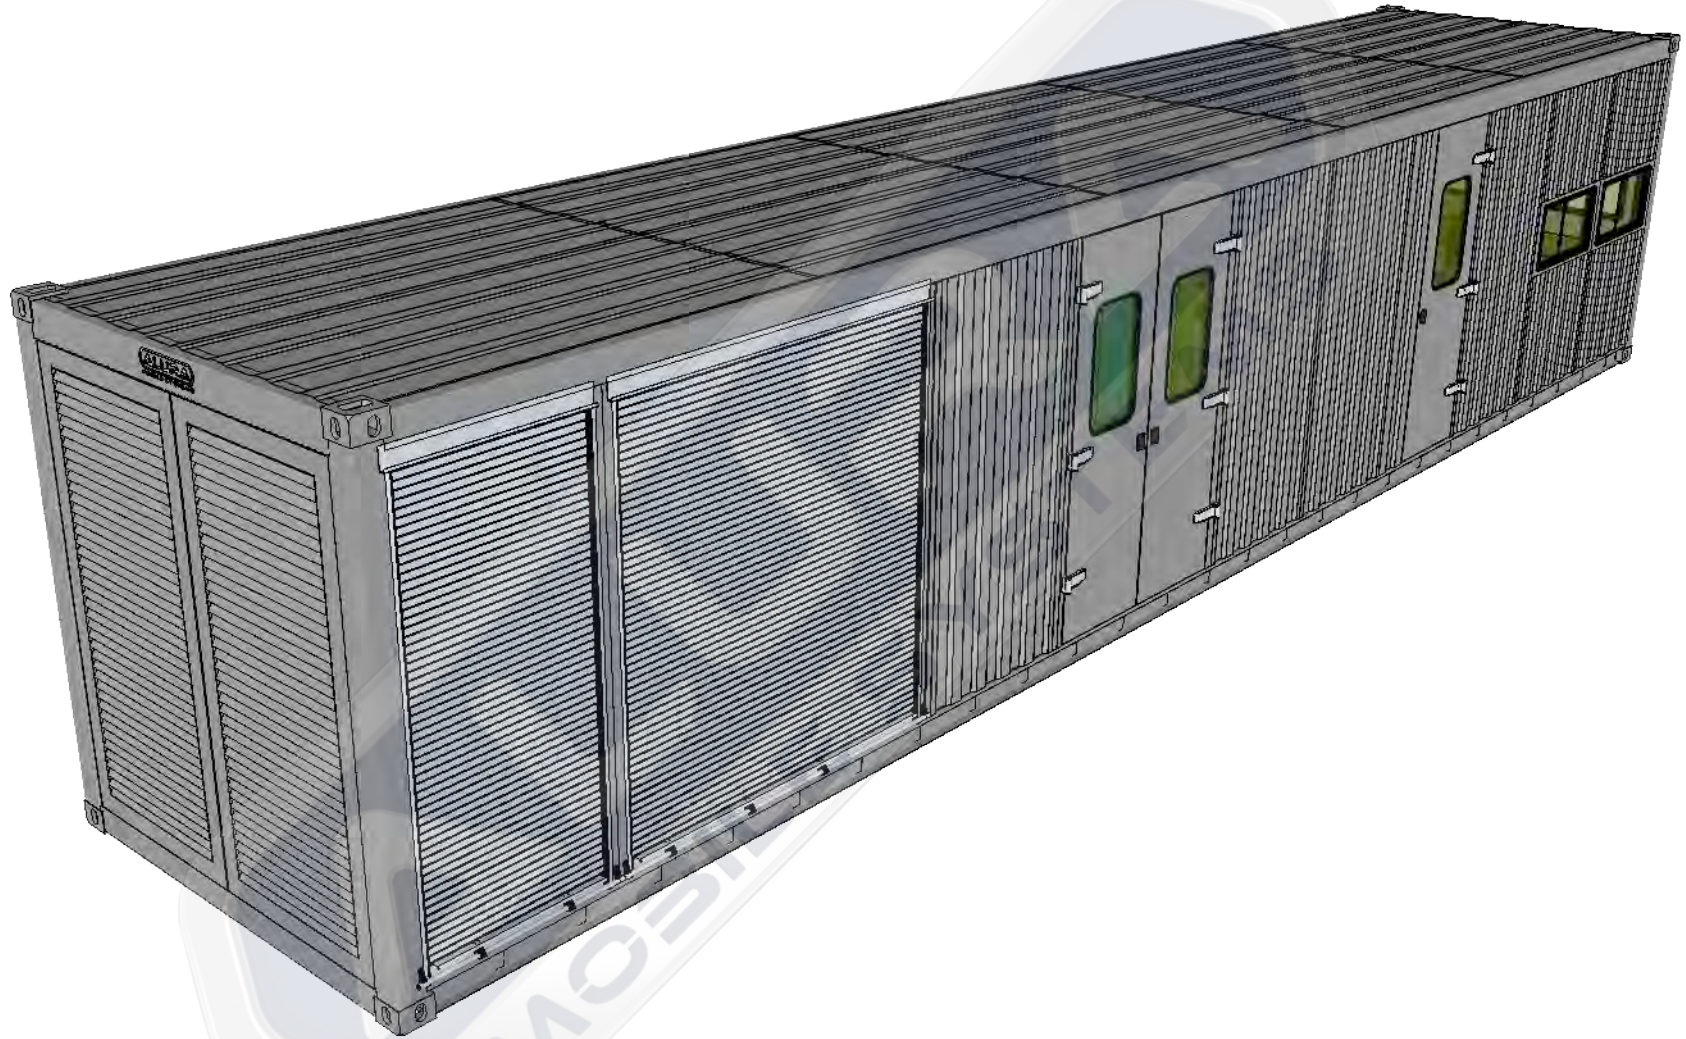


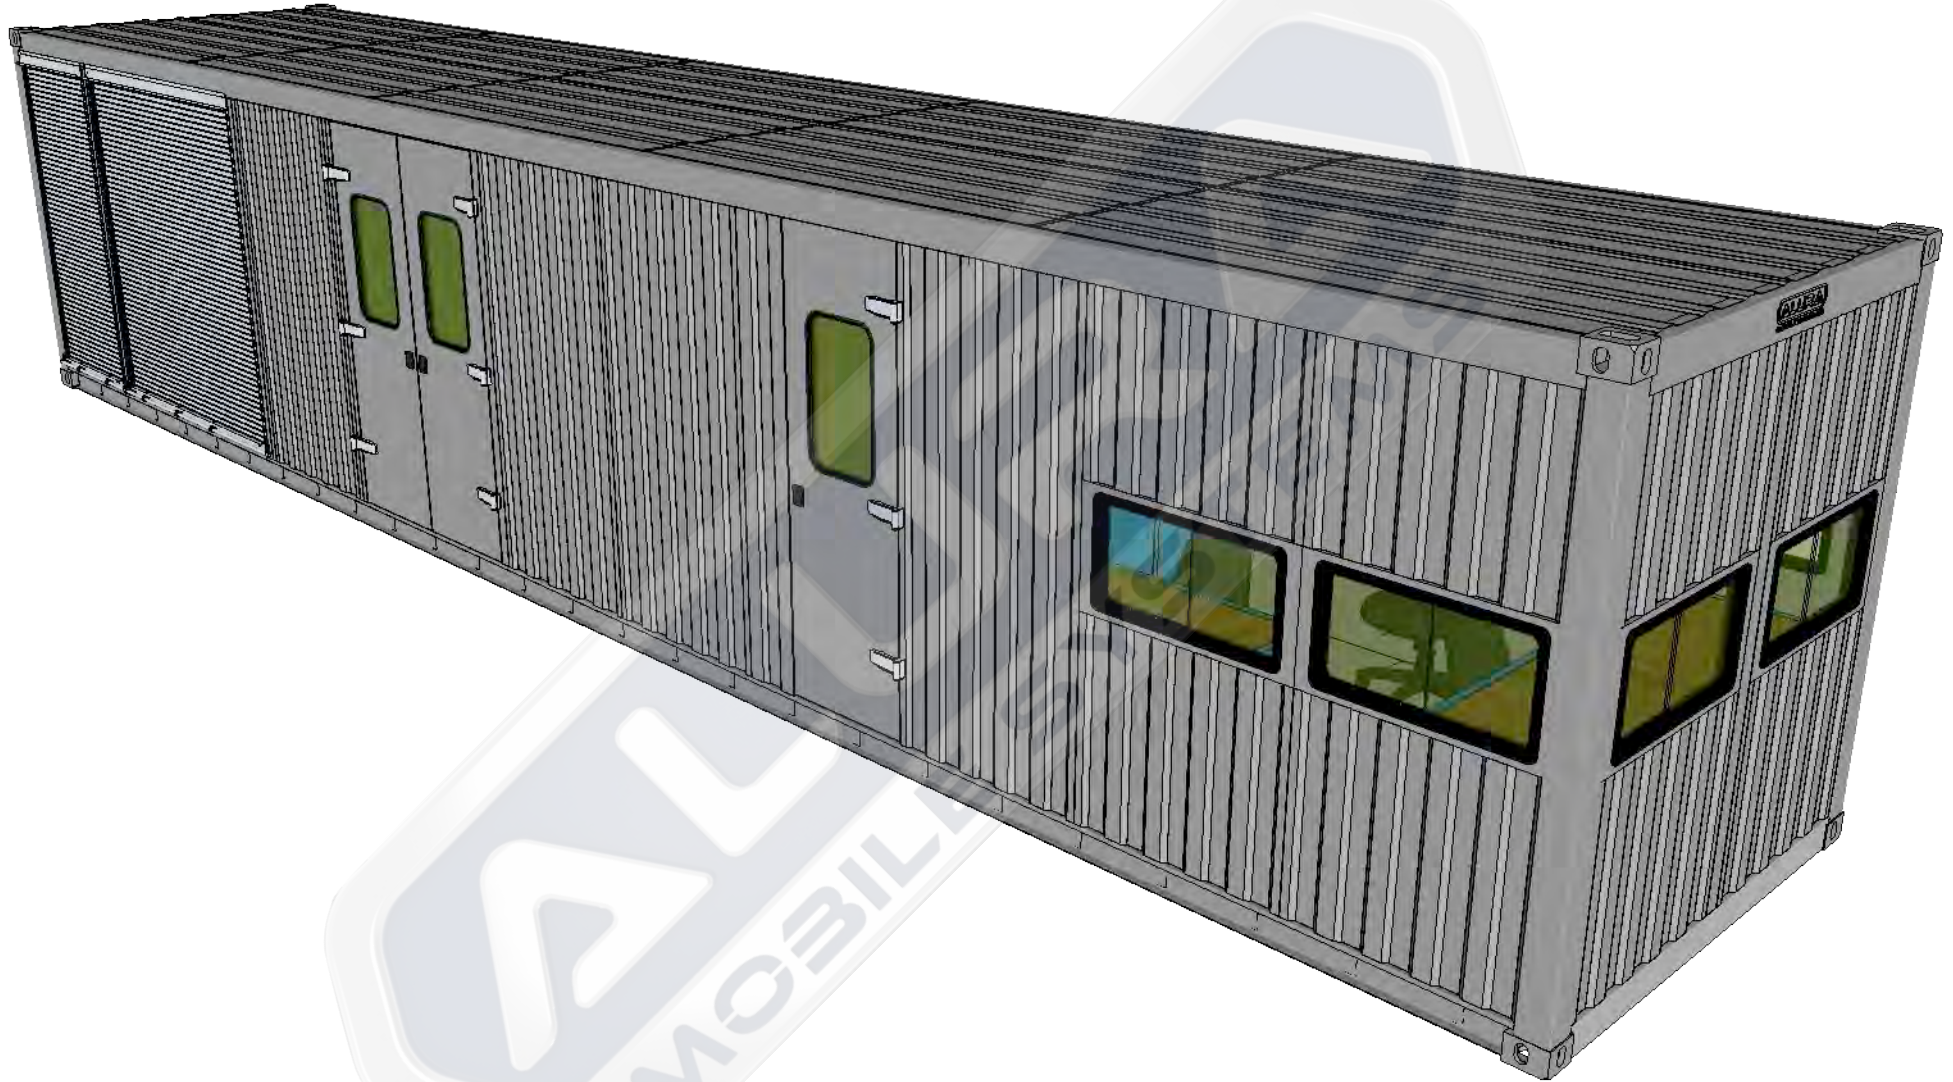


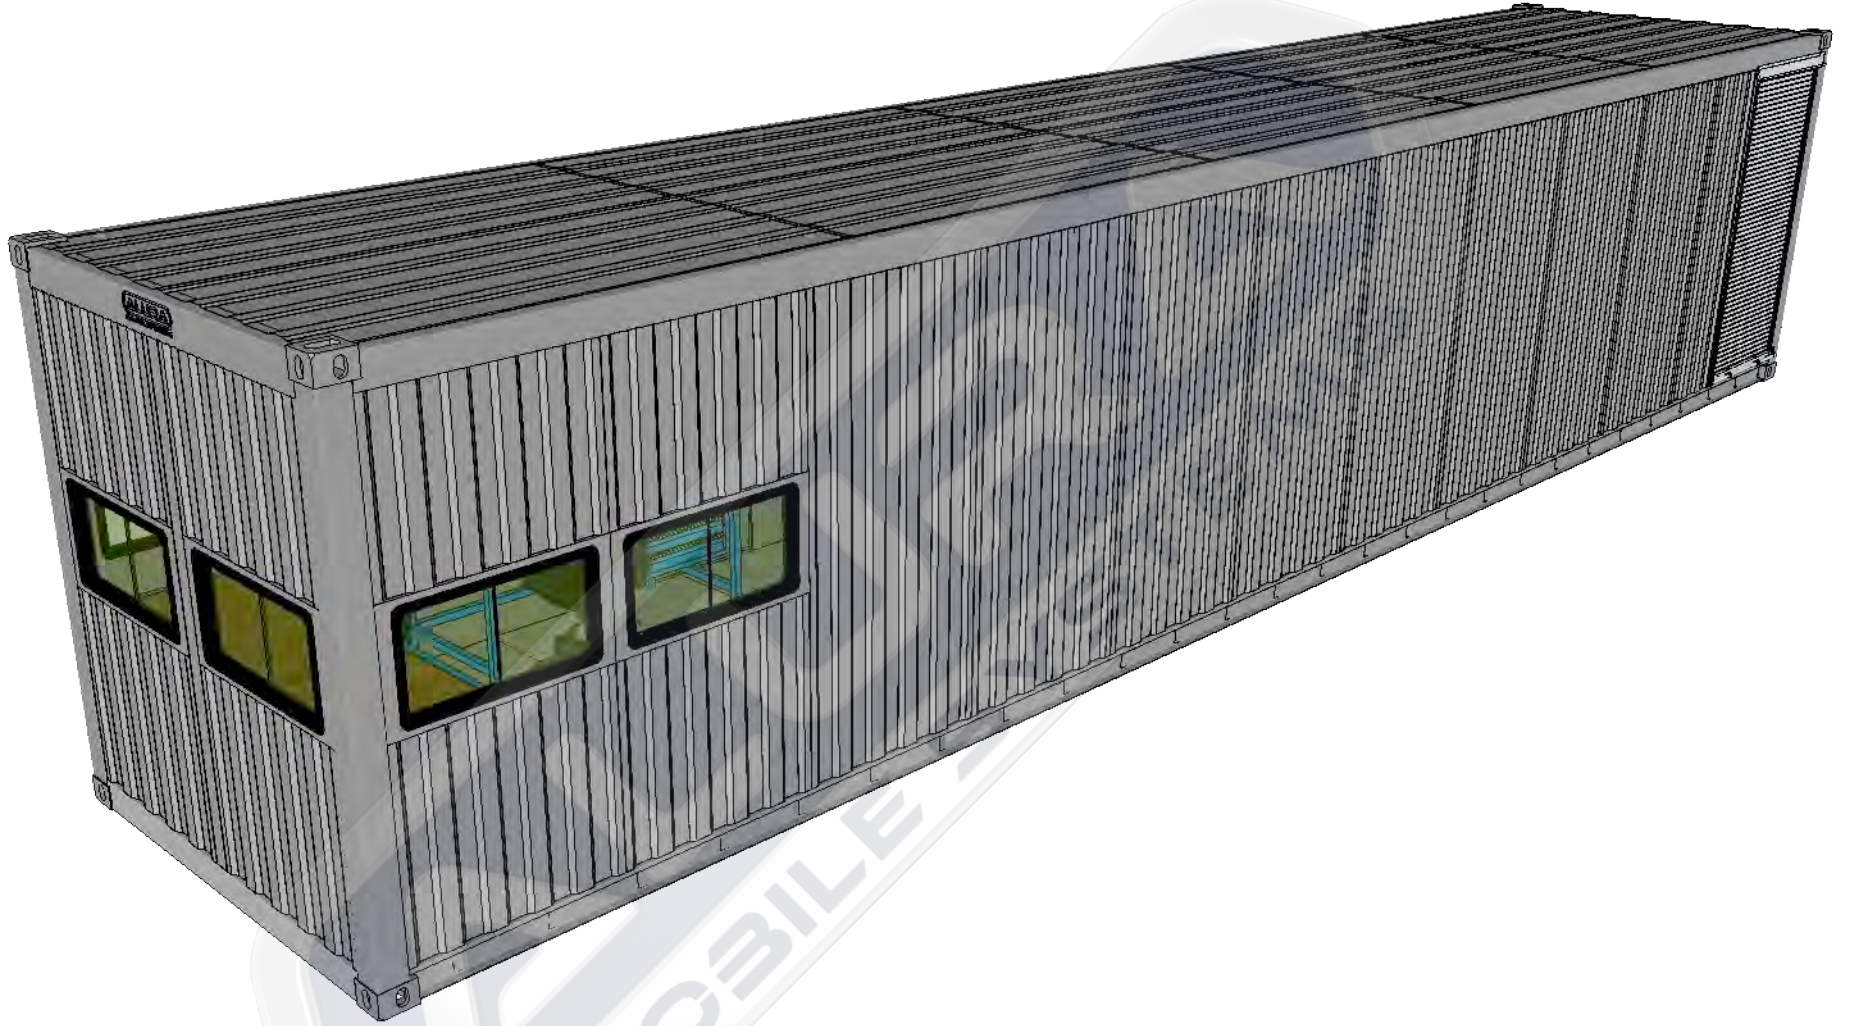


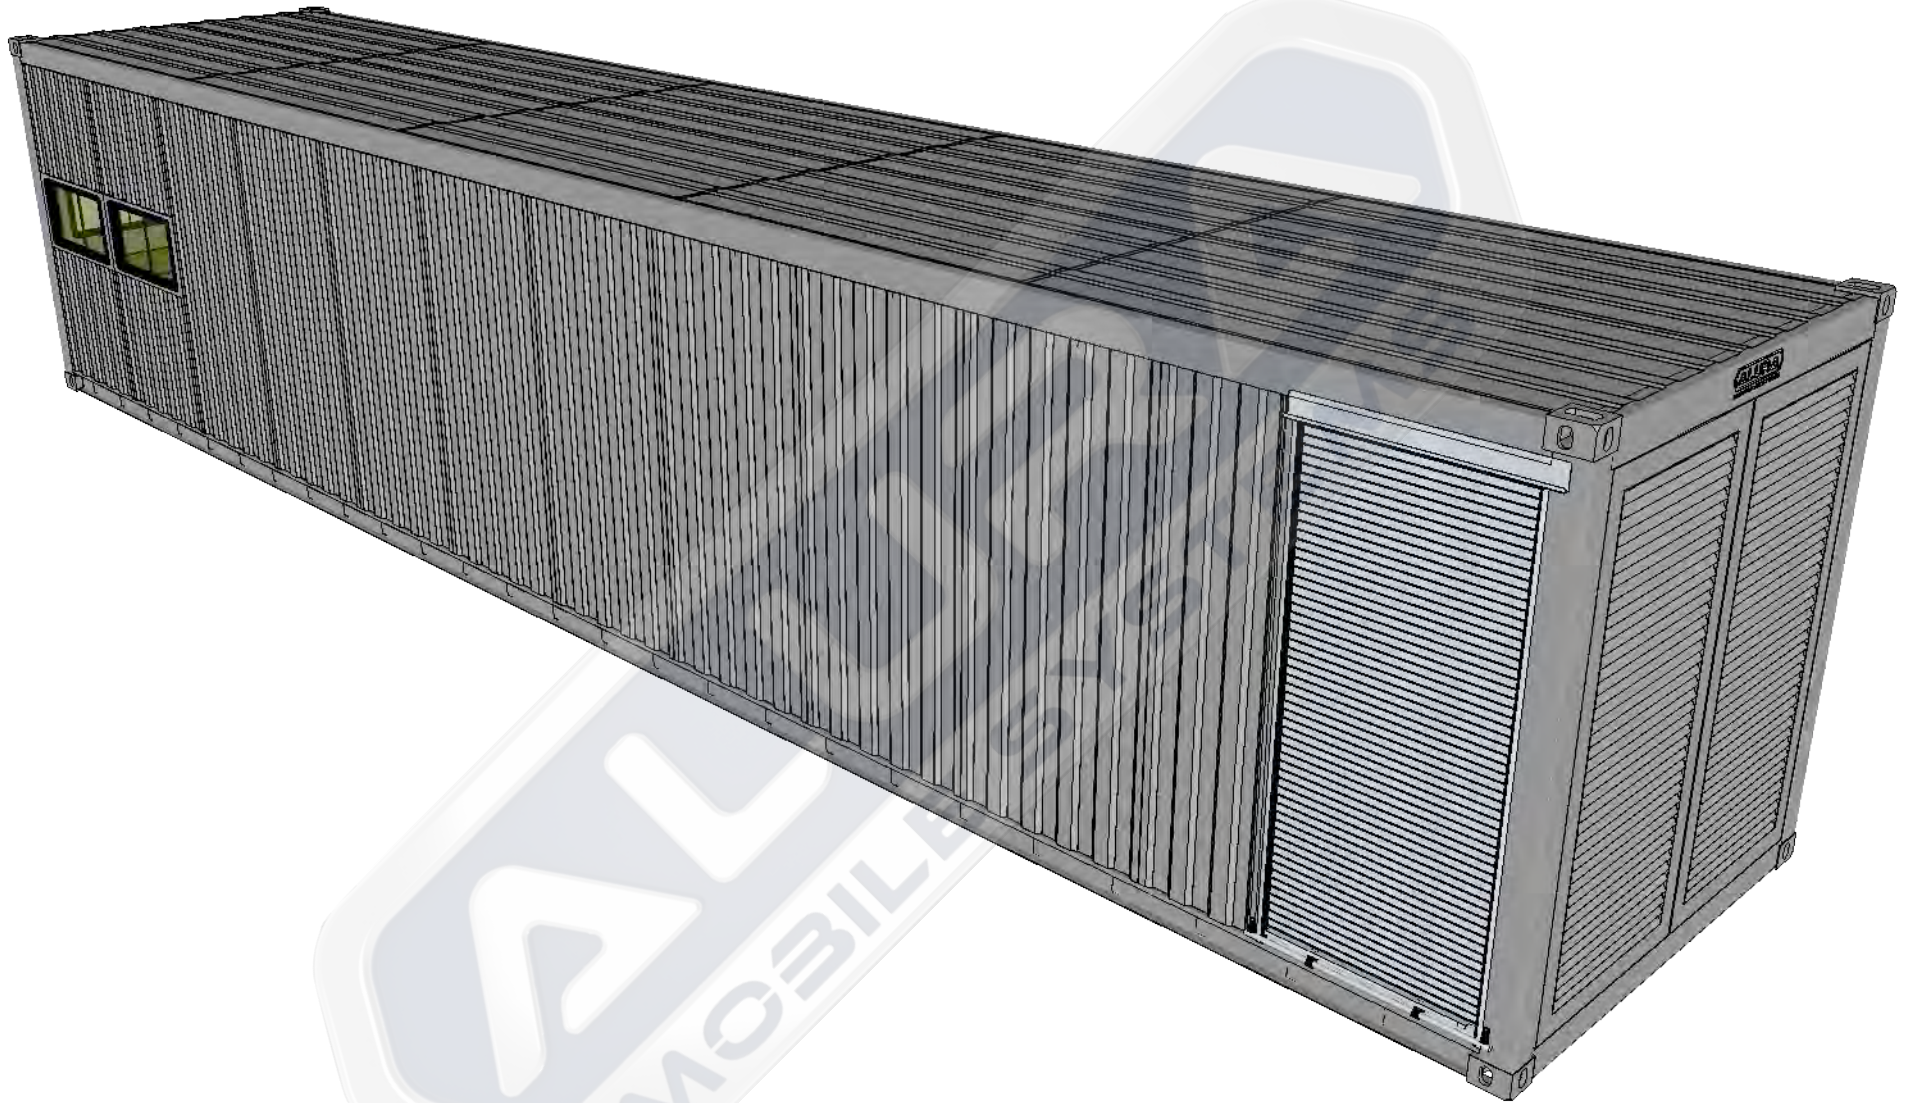

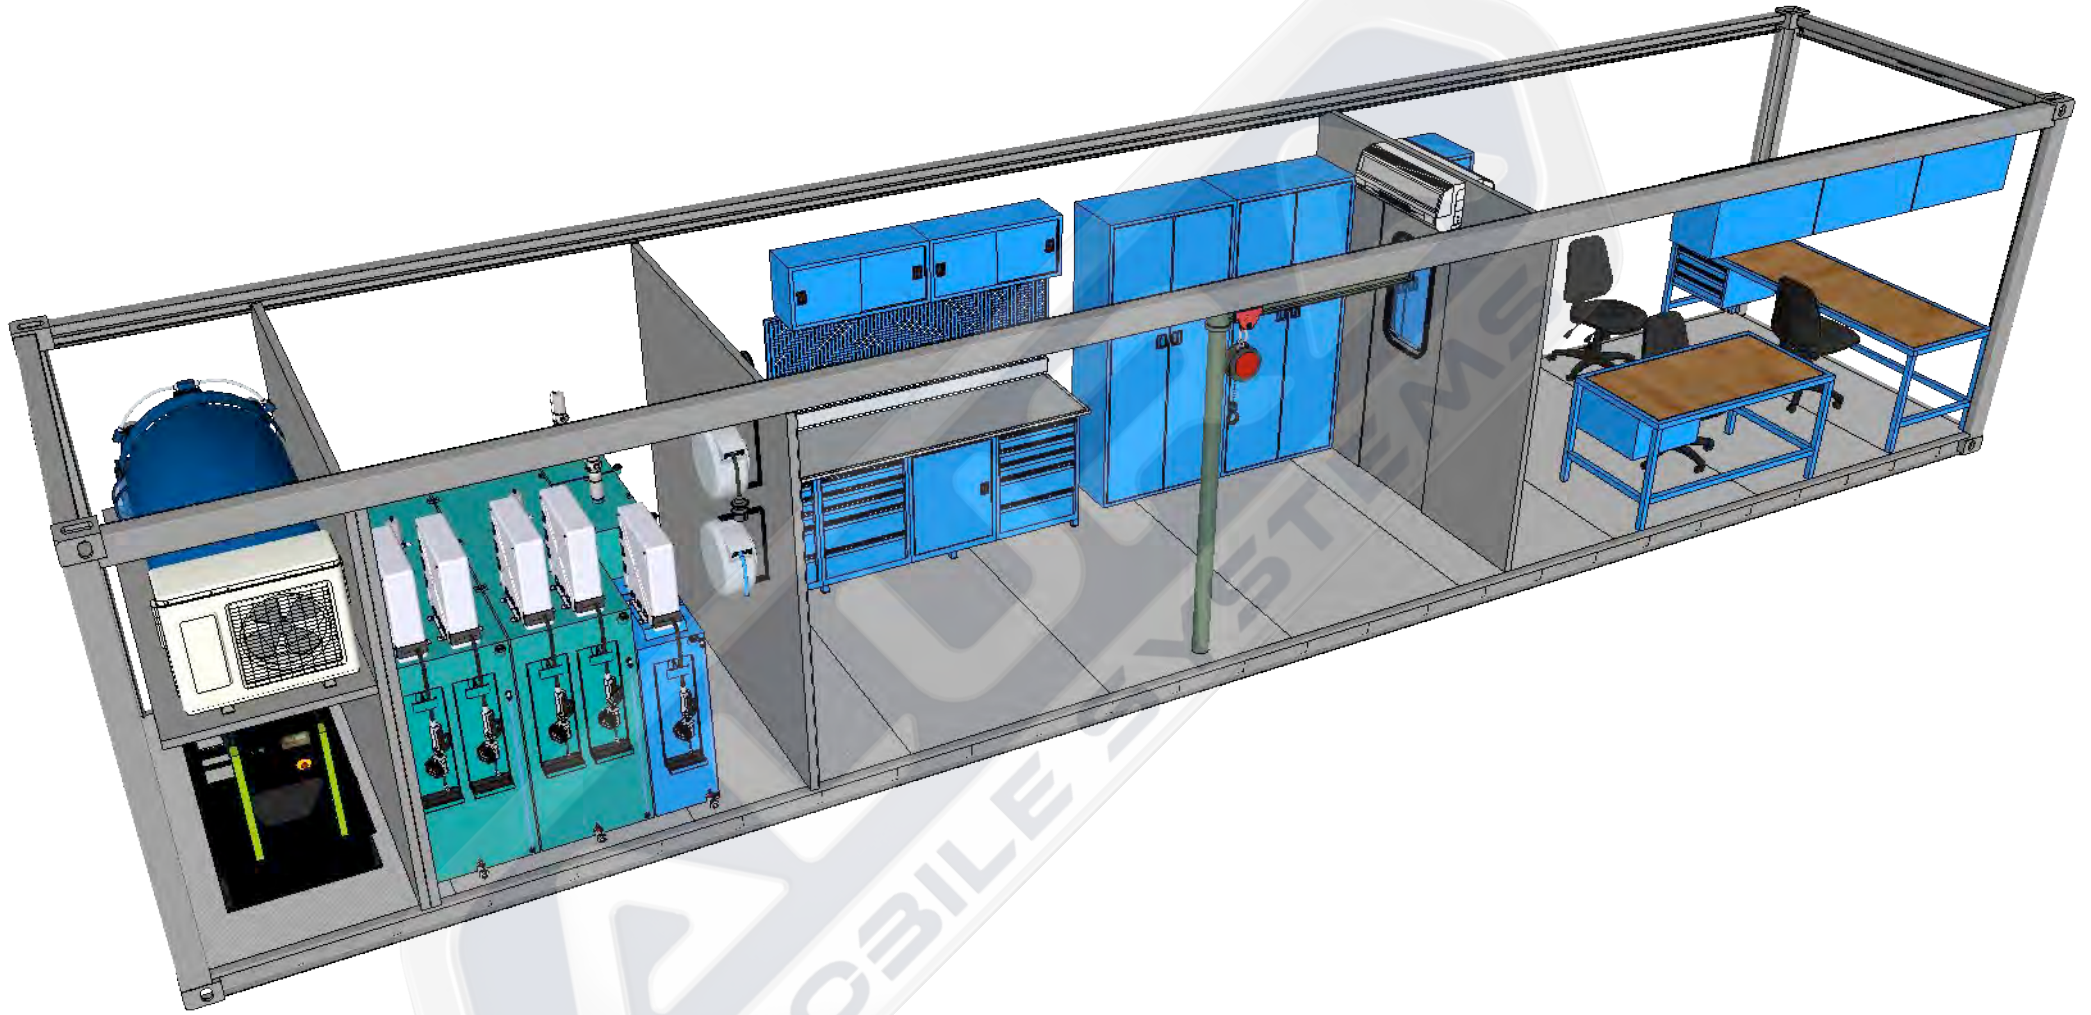

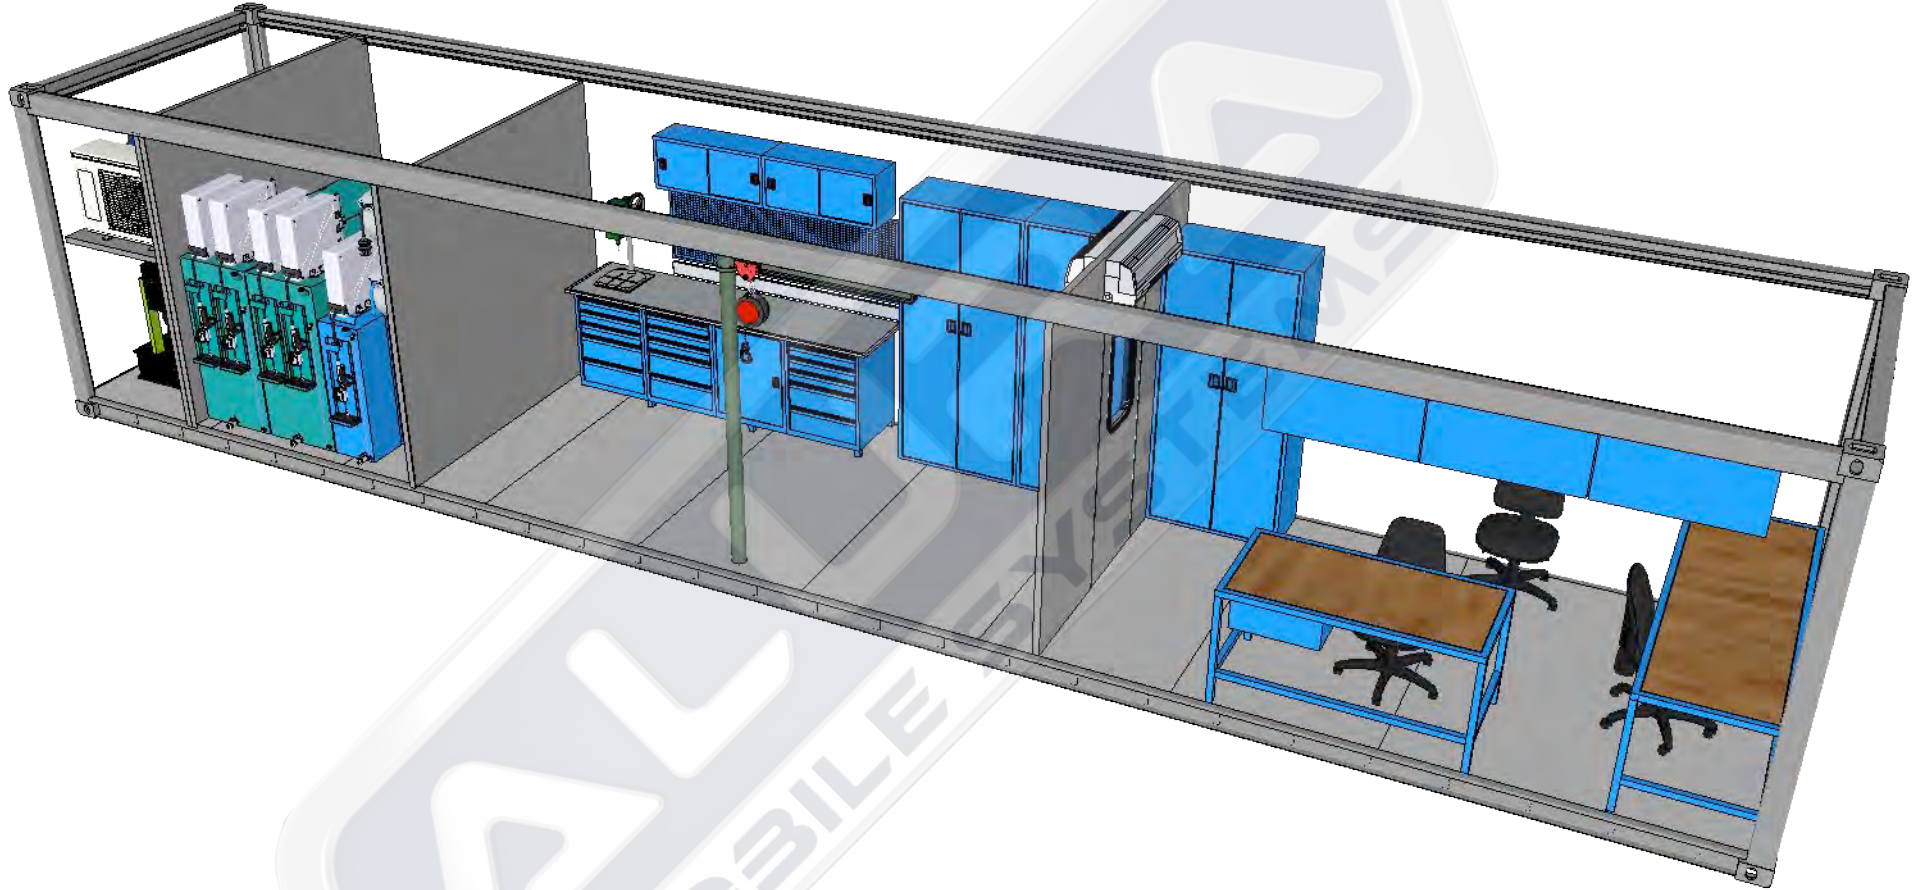

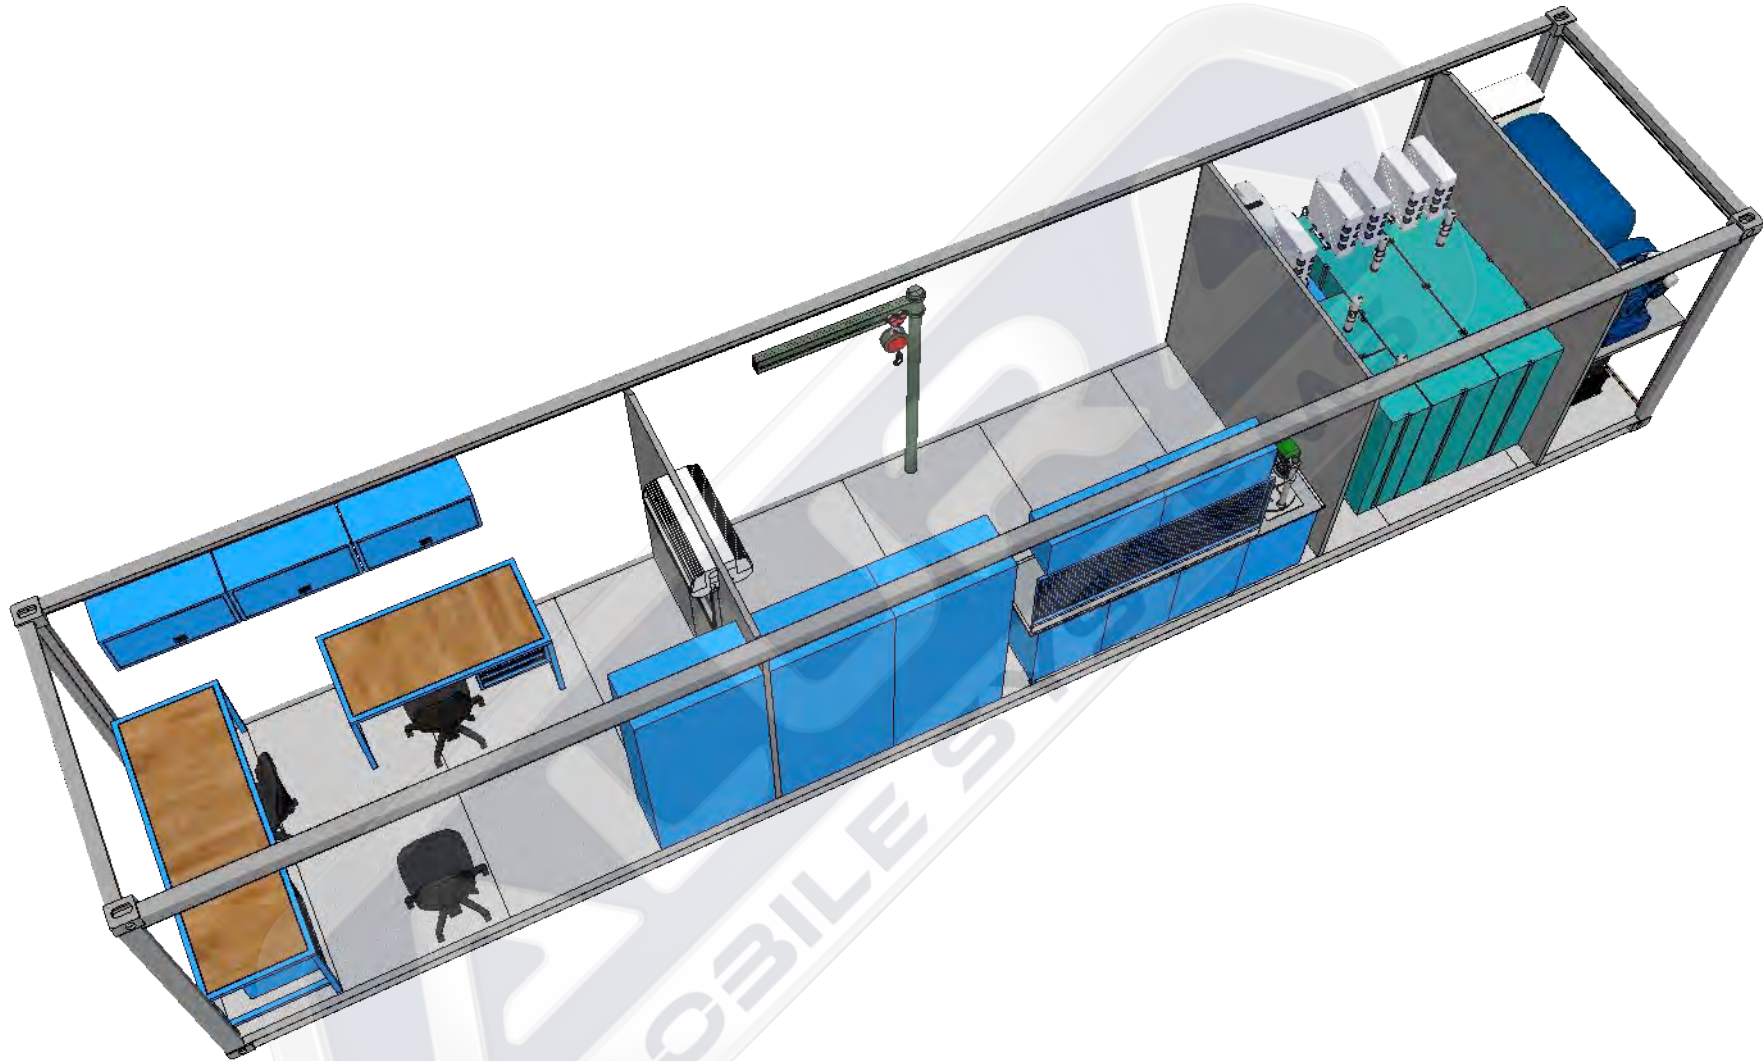

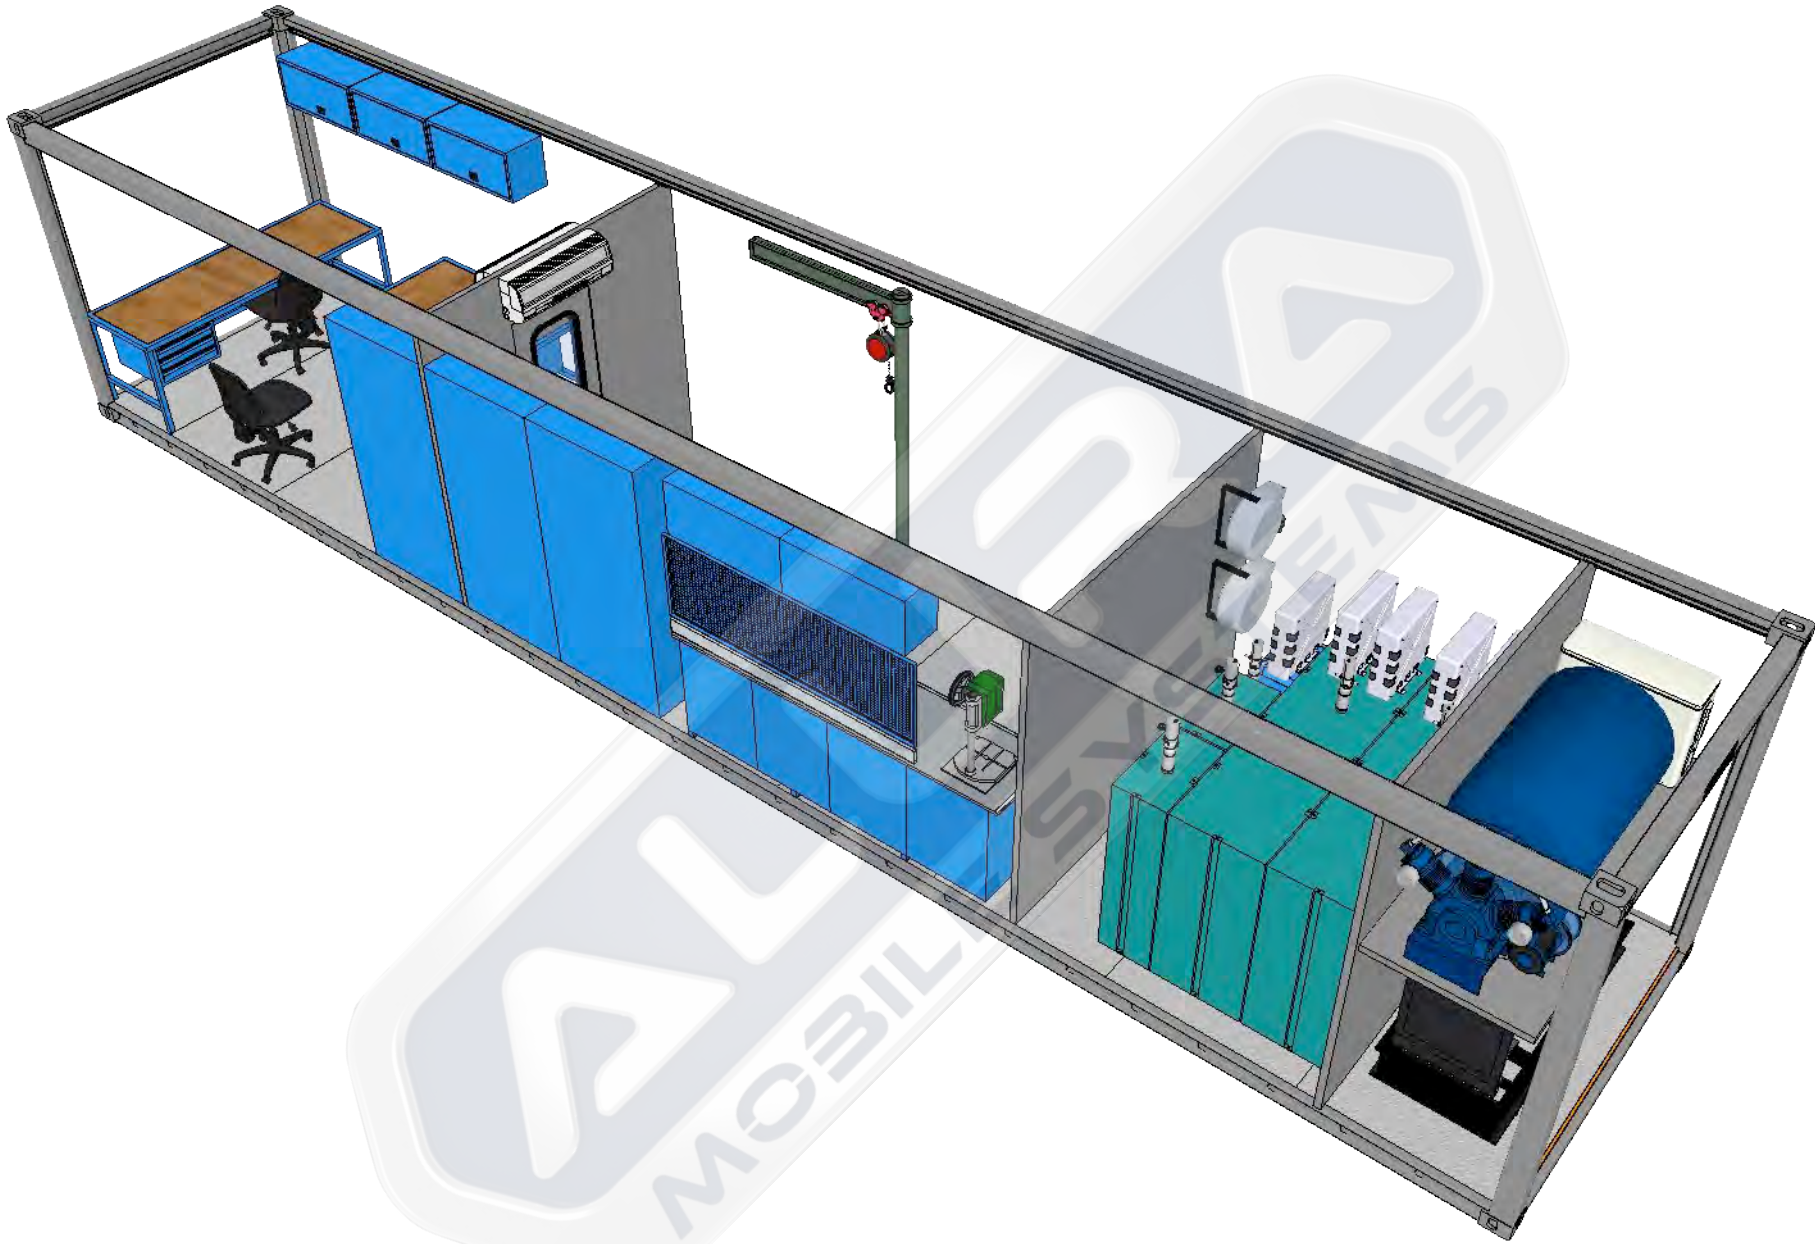

No	Equipment	Explanation	Producer	Orjin	Piece
1	Bodywork		Alura	Turkey	1
		40 ft HG/ ISO Container From twisted C type channel steel. Base traverses 80mm height 3mm 18 mm Elastomeric rubber insulation. Floor 18mm Plywood plywood. Sliding windows to usable areas. Generator and compressor areas are quickly accessible cover. Exhaust and ventilation device. Stainless hinges and locks. Outside transportation center control board. Electrical cables are hidden inside the insulated chassis.	Outside transportation center control board. Electrical cables are hidden inside the insulated chassis. Quick access cover to the lubricating and washing rollers. Monolithic crane connection channel to the body frame. Fixed glass rear door. Environmental and interior lighting 220v. Acrylic industrial chassis and surface paint. Quick-access rear bumper drawers. Metal items are fixed to the chassis. Floor Covering Aluminum 3/4 mm		
2	Aluminum Shutters		Alura	Turkey	3
		Manuel Working Locking Systems Size : 1000 x 2300 mm 2 pcs. Size : 1800 x 2.300 mm 1 pcs.			
3	Generator Diesel		Power	Turkey	1
		Standby/Prime Power: 22 kVa / 23 kVa Standard Voltage: 400/230 V / 3 Phase Engine Bran: Perkins Engine Model: 1103A-33TG1 Alternator: Sincron RPM: 1500 rpm.	Frequency: 50 Hz. Water Cooling		
4	Pistone Compressor		Aykom	Turkey	1
		Chassis Piston Air Compressor Engine Power: 5.5 hp Air Intake: 630 lt/min Revolution : 950 rpm Pressure : 12 bar Working Power : 380 V			
5	Air Tank		Alura	Turkey	1
		Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Connection : 1" Air Outlet : 1/2"			

No	Equipment	Explanation	Producer	Orjin	Piece
6	Work Bench		Alura	Turkey	1
		Work Bench Width: 1.800 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg.	Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Electrostatic powder paint Suspension boards modular		
7	Metal Table		Alura	Turkey	2
		Width: 1.500 mm Depth: 7.00 mm Height: 850 mm Number of Drawers: 2 Drawer Carrying Capacity: 60 kg. Color: Ral 5015 Electrostatic Coated	Shelf Carrying Cap .: 80 kg. 25 mm MDF + Pvc on worktops Suspension boards modular		
8	Metal Cabinet		Alura	Turkey	2
		Width: 1.000 mm Depth: 450 mm Height: 2000 mm Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg. Variable drawer groups	Body and carriers 0.80 - 1.2 mm sheet metal It is long-lasting and durable. The covers are double wing reinforced."		
9	Metal Cabinet		Alura	Turkey	1
		WxDxH: 1.000 x 450 x 2.000 mm Body and carriers 0.80 - 1.2 mm It is long-lasting and durable. The covers are double wing reinforced. Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg.	Variable drawer groups		
10	Chair		Alura	Turkey	3
		Material: Block Sponge Foot: Plastic Surface Upholstery: Leather Armrest / Skeleton: Plastic Foot Shape: Wheeled Height Adjustment: Yes			
11	Air Conditioning		Samsung	Kore	2
		Cooling Capacity : 16.000 btu Input Voltage : 220 V - 50 Hz Current Cooling : 6.3 / 6.9 A Required Fuse : 7 A Thermostatic Heat Control Yes Refrigerant : R410a			

No	Equipment	Explanation	Producer	Orjin	Piece
12	Oil Pumps		Raasm	Italy	4
		Pneumatic pumps for oil Flow rate: 18 l / min Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE			
13	Hose Reels		Raasm	Italy	4
		Pressure: 150 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			
14	Guns for dispensing		Raasm	Italy	4
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
15	Oil Tank		Alura	Turkey	2
		Volume: 1.000 lt Metal prism tank Occupancy indicator Filler caps Pump stabilizer Discharge1" valve			
16	Oil Tank		Alura	Turkey	2
		Volume: 250 lt Metal prism tank Occupancy indicator Filler caps Pump stabilizer Discharge1" valve			
17	Antifreeze Pump		Raasm	Italy	1
		Pneumatic pumps for Antifreeze Flow rate: 30 l / min Air inlet - Fluid Out : G 1/4 - G 1/2 Air working pressure: 6/8 bar Average air consumption: 370 l / min	Noise level: 81 dB Weight : 7,4 kg		

No	Equipment	Explanation	Producer	Orjin	Piece
18	Antifreeze Hose Reels		Raasm	Italy	1
		Pressure: 150 bar Hose Length: 15 mt Compatible fluids: Antifreeze Material: Painted Steel Inlet-Outlet : G 1/2 "f - G 1/2 "m Operating temperature: -40 / +100	Pressure - Size: 1/2 " - 160 bar		
19	Guns for dispensing		Raasm	Italy	1
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
20	Antifreeze Tank		Alura	Turkey	1
		Capacity : 250 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 2" Pump stabilizer : 2 " Discharging valve : 1"			
21	Air Hose Roller		Mavel	Italy	1
		Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" F - 3/8" M Automatic Rewind Plastic outer casing	Steel rotating wall brake Size: 50x43.5x23.5 cm Weight: 8.3 Kg		
22	Cable Roller		Mavel	Italy	1
		20 Mt 5*1.5 Mm Three Phase : 220 Volt Cable Thickness: 5*1.5 Mm2 Cable Length: 20 Mt Cable Type : H07RN-F Power : 1000-3000 W	Auto Rewind Plastic outer cover steel swivel wall bracket Weight: 9 Kg Dimensions: 42x39x23 Cm		
23	Lighting		EAT	Turkey	6
		Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Power: 28 W / 38 W / 55 W Input Voltage: 220-240V - IP 65			

No	Equipment	Explanation	Producer	Orjin	Piece
24	Control panel of all equipment.	Generator / Mains power connection.	Alura	Turkey	1
					
25	Outdoor Lighting	Operating Voltage / Current: DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS	CSR	Turkey	6
					
26	Clamp	Size : 150 mm Jaw Width : 150 mm Total Lenght : 420 mm Arvil Size : 70x100 mm Vice Heaighy : 170 mm	İzeltaş	Turkey	1
					
27	Chain Crane	Capacity 1.000 Kg. Chain 5 mt.	Atlas	Kore	1
					
28	Fire extinguisher	Capacity: 6 kg. Full Weight: 9.1 kg. Working Pressure: 18 bar. Discharge Time: 14 sec. Extinguishing Agent: MAP@ (ABC)	Cakır	Turkey	2
					
29	Air Regulator	Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temperature: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min	Osaka	Japan	1
					

No	Equipment	Explanation	Producer	Orjin	Piece
30	Air Line Connection		Osaka	Japan	1
		Polyurethane Pneumatic fittings			
					
31	Bench Drill	Bosch PBD 40	Bosch	Germany	1
		Input power: 710W Idle speed (1st gear / 2nd gear): 200 – 850 / 600 – 2,500 rpm Laser type: 650 nm, <1 mW Laser class: 2 Max. in steel drilling diameter: 13 mm	Max. in wood drilling diameter: 40 mm Clamping range of the chuck: 1.5 – 13 mm Drilling stroke: 90 mm Dimensions Base plate (W x D x H): 330 x 350 x 30 mm Weight: 11.2 kg		
32	Bench Drill	Bosch GDS 18 V-LI HT	Bosch	Germany	1
		Battery voltage: 18 Volt Battery capacity: 4 Ah Maximum torque: 650 Nm Idle speed: 0 - 1,900 rpm Number of pulses: 0 - 2,100 pul/min Screw diameter: M12 - M 20	Tightening Screws and Nuts to the Maximum Allowable Size Vibration emission value ah: 12.5 m/s2 Tolerance K: 3.4 m/s2 Weight with battery: 3 Kg		
33	Pliers Side Cutter Set		İzeltaş	Turkey	1
		Electronics Side Cutter Electronics Peak Chisel Electronics Long Nose Pliers Electronics Pliers			
34	Aluminum Ladder		Saray	Turkey	1
		Double Exit Aluminum Ladder Anti-Slip Step and Plastic Wedge Light Durable High Strength 150 kg Carrying Capacity			
35	Wrench Set		İzeltaş	Turkey	4
		Fork Double Wrench Set 6x7 - 8x9 - 10x11 12x13 - 14x15 - 16x17 18x19 - 20x22			

No	Equipment	Explanation	Producer	Orjin	Piece
36	1/4" Twelve Corner Socket Wrench Set 15 mm	1/2" Socket Wrench Set Set 15 pieces. 1/4" Hexagon Socket Wrench: 4.5.6.7.8.9.10.11.12.13 1/4" Ratchet handle: 140 mm 1/4" Joint: 38 mm 1/4" T Arm: 115 mm	İzeltaş	Turkey	1
					
37	1/2" Twelve Corner Socket Wrench Set 24 pcs	1/2" Twelve Corner Socket Wrench: 10.11.12.13.14.15.16.17.18.19.21.22.2 3.24.26.27.28.30.32 1/2" Ratchet Handle: 250 mm 1/2" Joint: 70 mm 1/2" T Handle Adapter	İzeltaş	Turkey	1
					
38	3/4" Twelve Corner Socket Wrench Set 14 Pcs.	3/4" Hexagon Socket Wrench: 22.24.27.30.32.34.36.41.46.50. 3/4" Ratchet Handle 510 mm 3/4" T Arm 500 mm 3/4" Intermediate Arm 200 – 400 mm	İzeltaş	Turkey	1
					
39	T Allen Key Set	Allen Key Set: 8 Pieces Sizes: 2.5 – 3 – 4 – 5 – 6 – 7 – 8 – 10	İzeltaş	Turkey	1
					
40	Screwdriver set	Opaque Serial Screwdriver Set: 7 Pcs. Flat Tip: 3x80-4x80-4x100-5x125- 6x150 Star Tip: 4,5x80 6x100	İzeltaş	Turkey	1
					
41	Filter Wrenches	Double Chain Oil Filter Remover Filter Size: 60 - 160 mm	İzeltaş	Turkey	1
					

No	Equipment	Explanation	Producer	Orjin	Piece
42	Hammer		İzeltaş	Turkey	1
		Length: 360 mm Head: 135 mm Weight: 1,000 gr			
43	Hammer		İzeltaş	Turkey	1
		Length: 350 mm Head: 160 mm Weight: 5.000 gr			
44	Grease Nipples		Sensan	Turkey	1
		7/16 H1 Flat Grease Nipple 10 Pieces			
45	Shovels		Fiskar	Germany	1
		Multi-purpose digging shovel with pointed and sharpened cutting edge. Length: 1170 mm. Width: 180mm. Weight: 1820 gr.			
46	Chain Hoist		Max Extra	Kore	1
		1 Tons 5 Meter Chain			