

# 20" Container Workshop



## 20" Container Workshop

Project No	Revision No	Date	Page
20.019	000	1.09.2020	1 / 9

ALURA TRAILER  
P +90 232 999 95 00 M +90 544 242 04 91  
Mithatpaşa Cad. No: 277/11 İzmir / TURKEY  
[www.aluratrailer.com](http://www.aluratrailer.com) [sales@aluratrailer.com](mailto:sales@aluratrailer.com)







2.450 mm

2.600 mm

6.000 mm

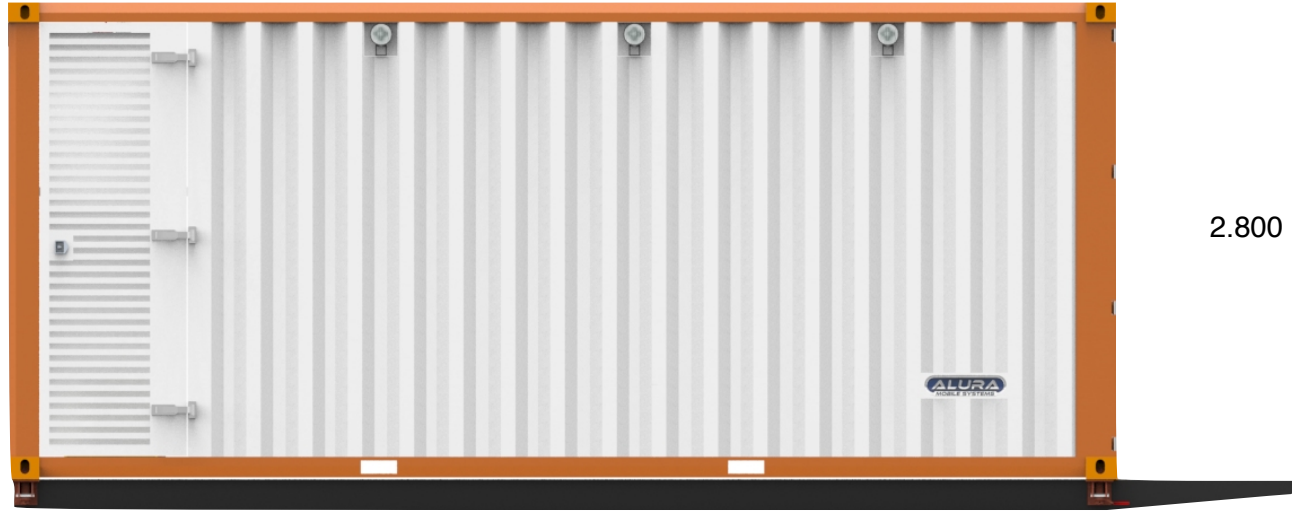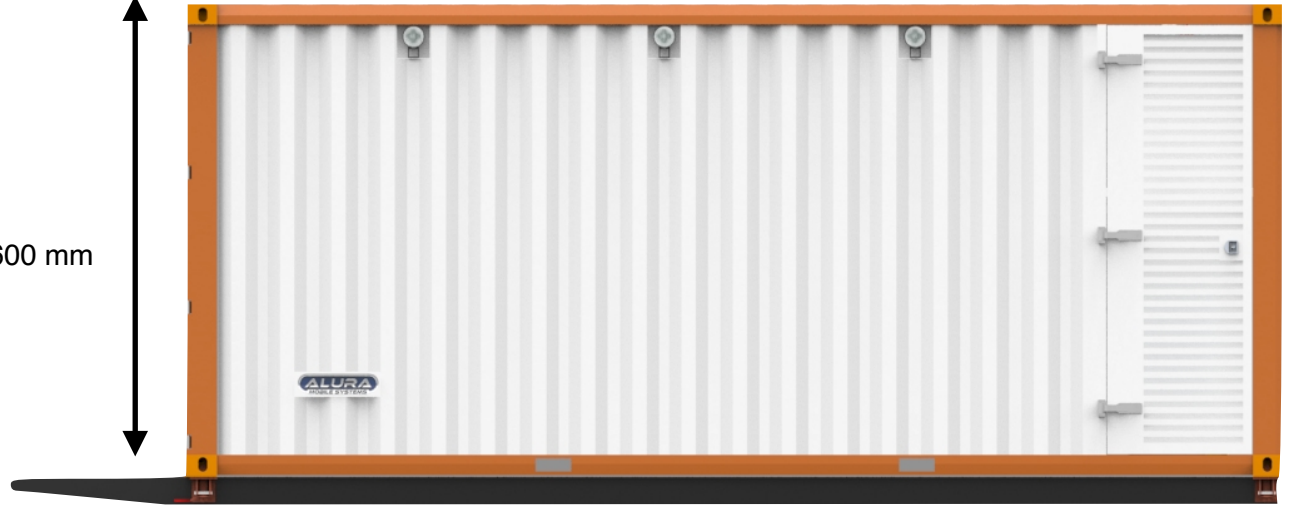

7.000 mm

2.800 mm



### 20" Container Workshop

Prct. No : 20.019  
Rev. : 000  
Date : 1.09.2020  
Page : 2 / 9

ALURA TRAILER  
P: +90 232 999 95 00  
M :+90 544 242 04 91  
www.aluratrailer.com

sales@aluratrailer.com





## 20" Container Workshop

Prct. No : 20.019  
Rev. : 000  
Date : 1.09.2020  
Page : 3 / 9

ALURA TRAILER  
P: +90 232 999 95 00  
M :+90 544 242 04 91  
[www.aluratrailer.com](http://www.aluratrailer.com)

[sales@aluratrailer.com](mailto:sales@aluratrailer.com)







## 20" Container Workshop

Prct. No : 20.019  
Rev. : 000  
Date : 1.09.2020  
Page : 4 / 9

ALURA TRAILER  
P: +90 232 999 95 00  
M :+90 544 242 04 91  
[www.aluratrailer.com](http://www.aluratrailer.com)

[sales@aluratrailer.com](mailto:sales@aluratrailer.com)





## 20" Container Workshop


Prct. No : 20.019  
Rev. : 000  
Date : 1.09.2020  
Page : 5 / 9

ALURA TRAILER  
P: +90 232 999 95 00  
M :+90 544 242 04 91  
[www.aluratrailer.com](http://www.aluratrailer.com)

[sales@aluratrailer.com](mailto:sales@aluratrailer.com)





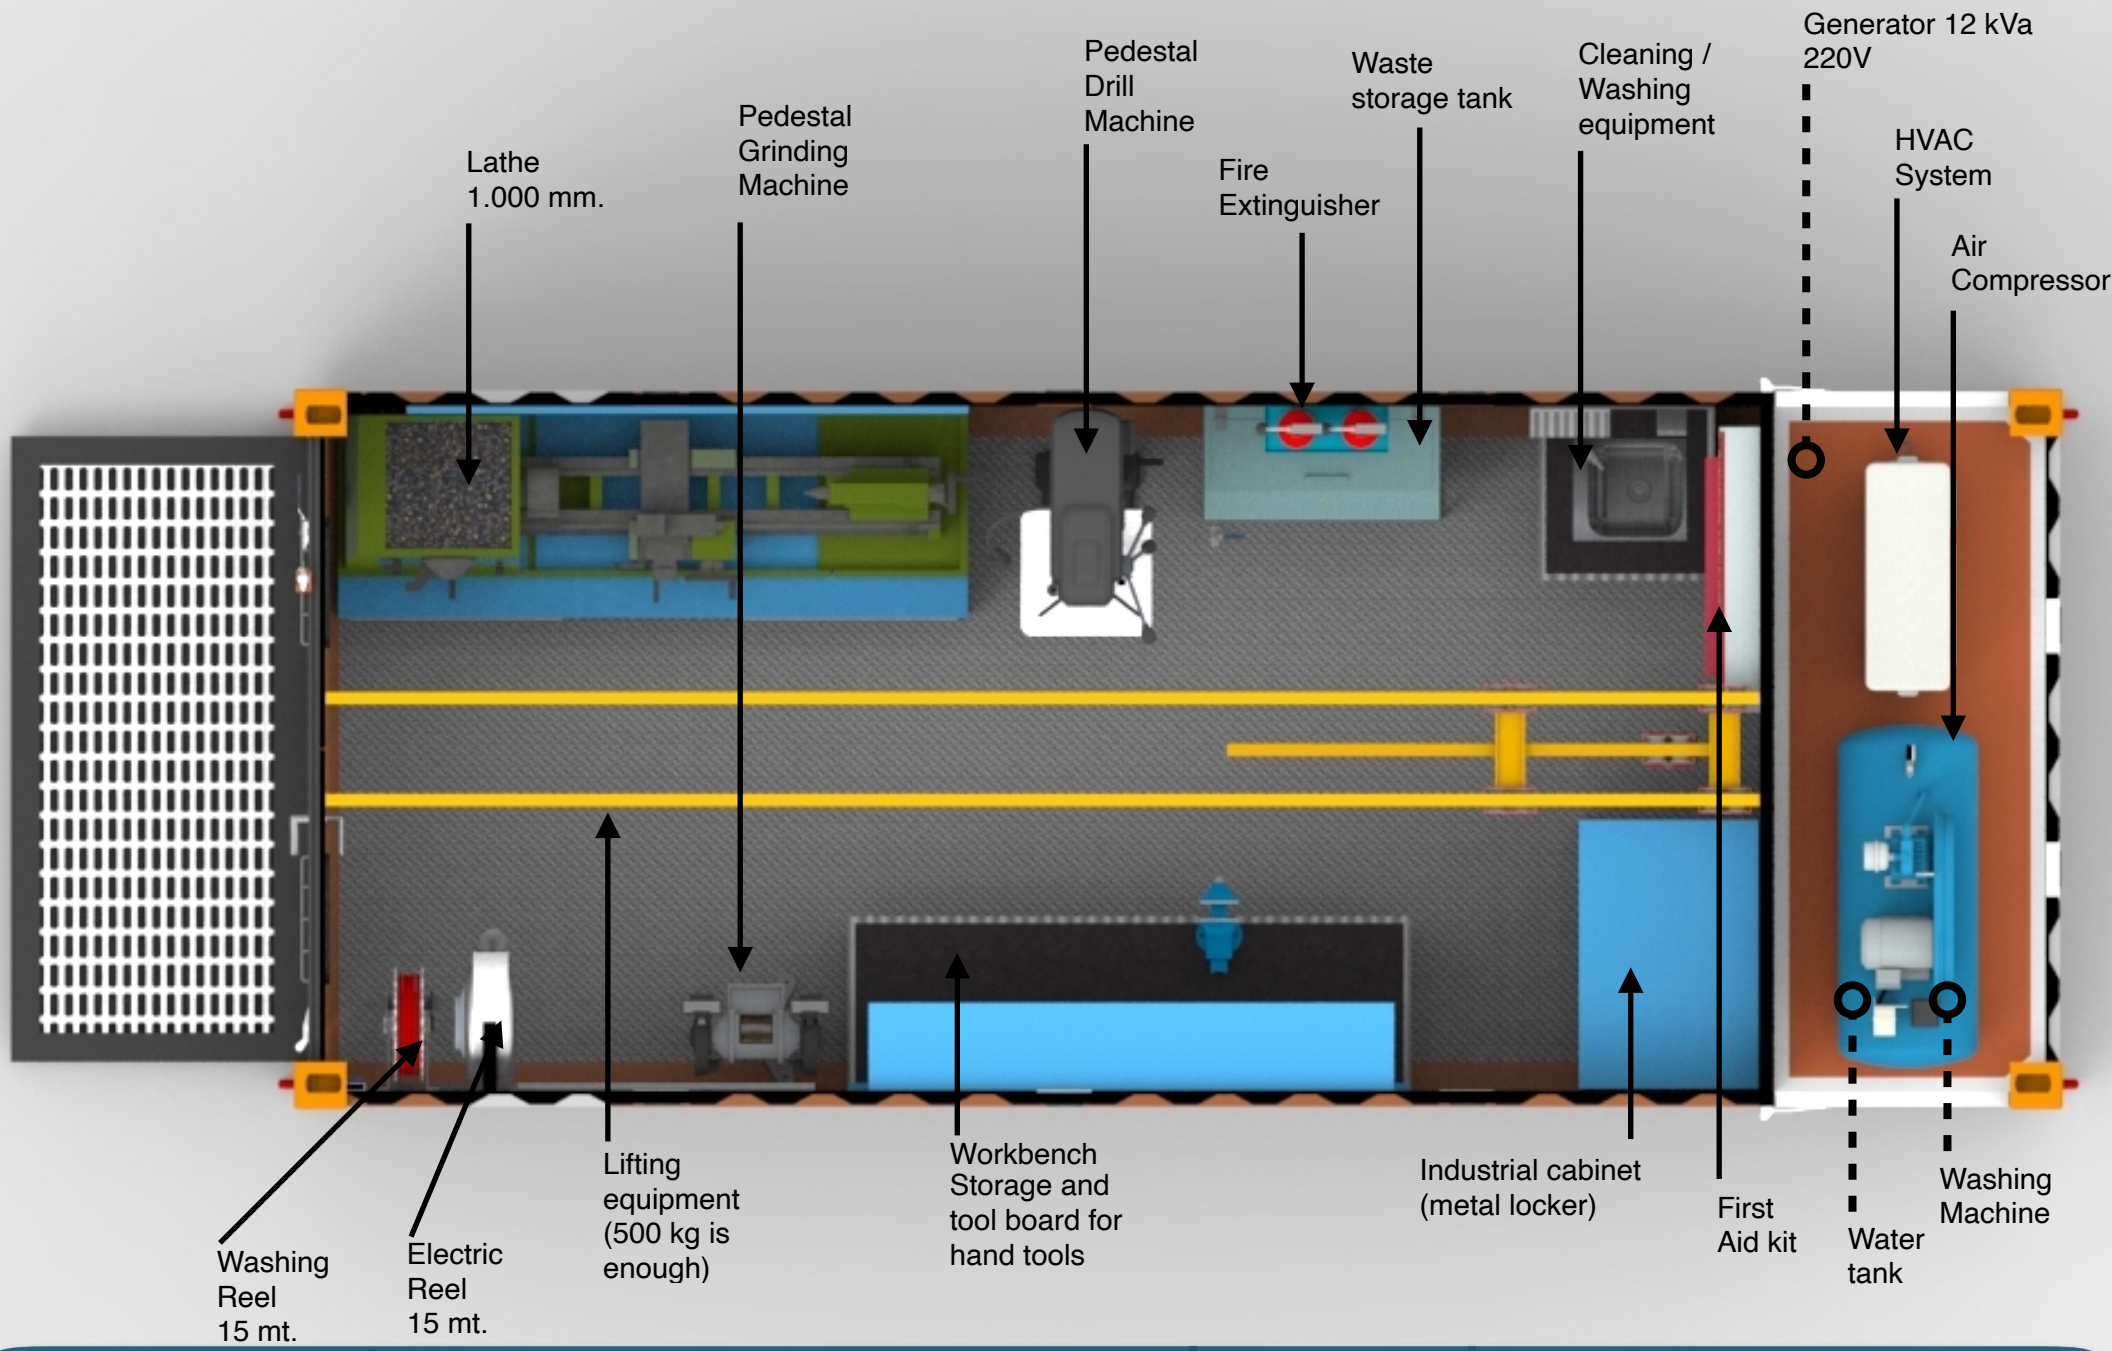

Lathe  
1.000 mm.

Pedestal  
Grinding  
Machine

Pedestal  
Drill  
Machine

Fire  
Extinguisher

Waste  
storage tank

Cleaning /  
Washing  
equipment

Generator 12 kVa  
220V

HVAC  
System

Air  
Compressor

Washing  
Reel  
15 mt.

Electric  
Reel  
15 mt.

Lifting  
equipment  
(500 kg is  
enough)

Workbench  
Storage and  
tool board for  
hand tools

Industrial cabinet  
(metal locker)

First  
Aid kit

Water  
tank

Washing  
Machine




## 20" Container Workshop

Prct. No : 20.019  
Rev. : 000  
Date : 1.09.2020  
Page : 6 / 9

ALURA TRAILER  
P: +90 232 999 95 00  
M :+90 544 242 04 91  
[www.aluratrailer.com](http://www.aluratrailer.com)

[sales@aluratrailer.com](mailto:sales@aluratrailer.com)



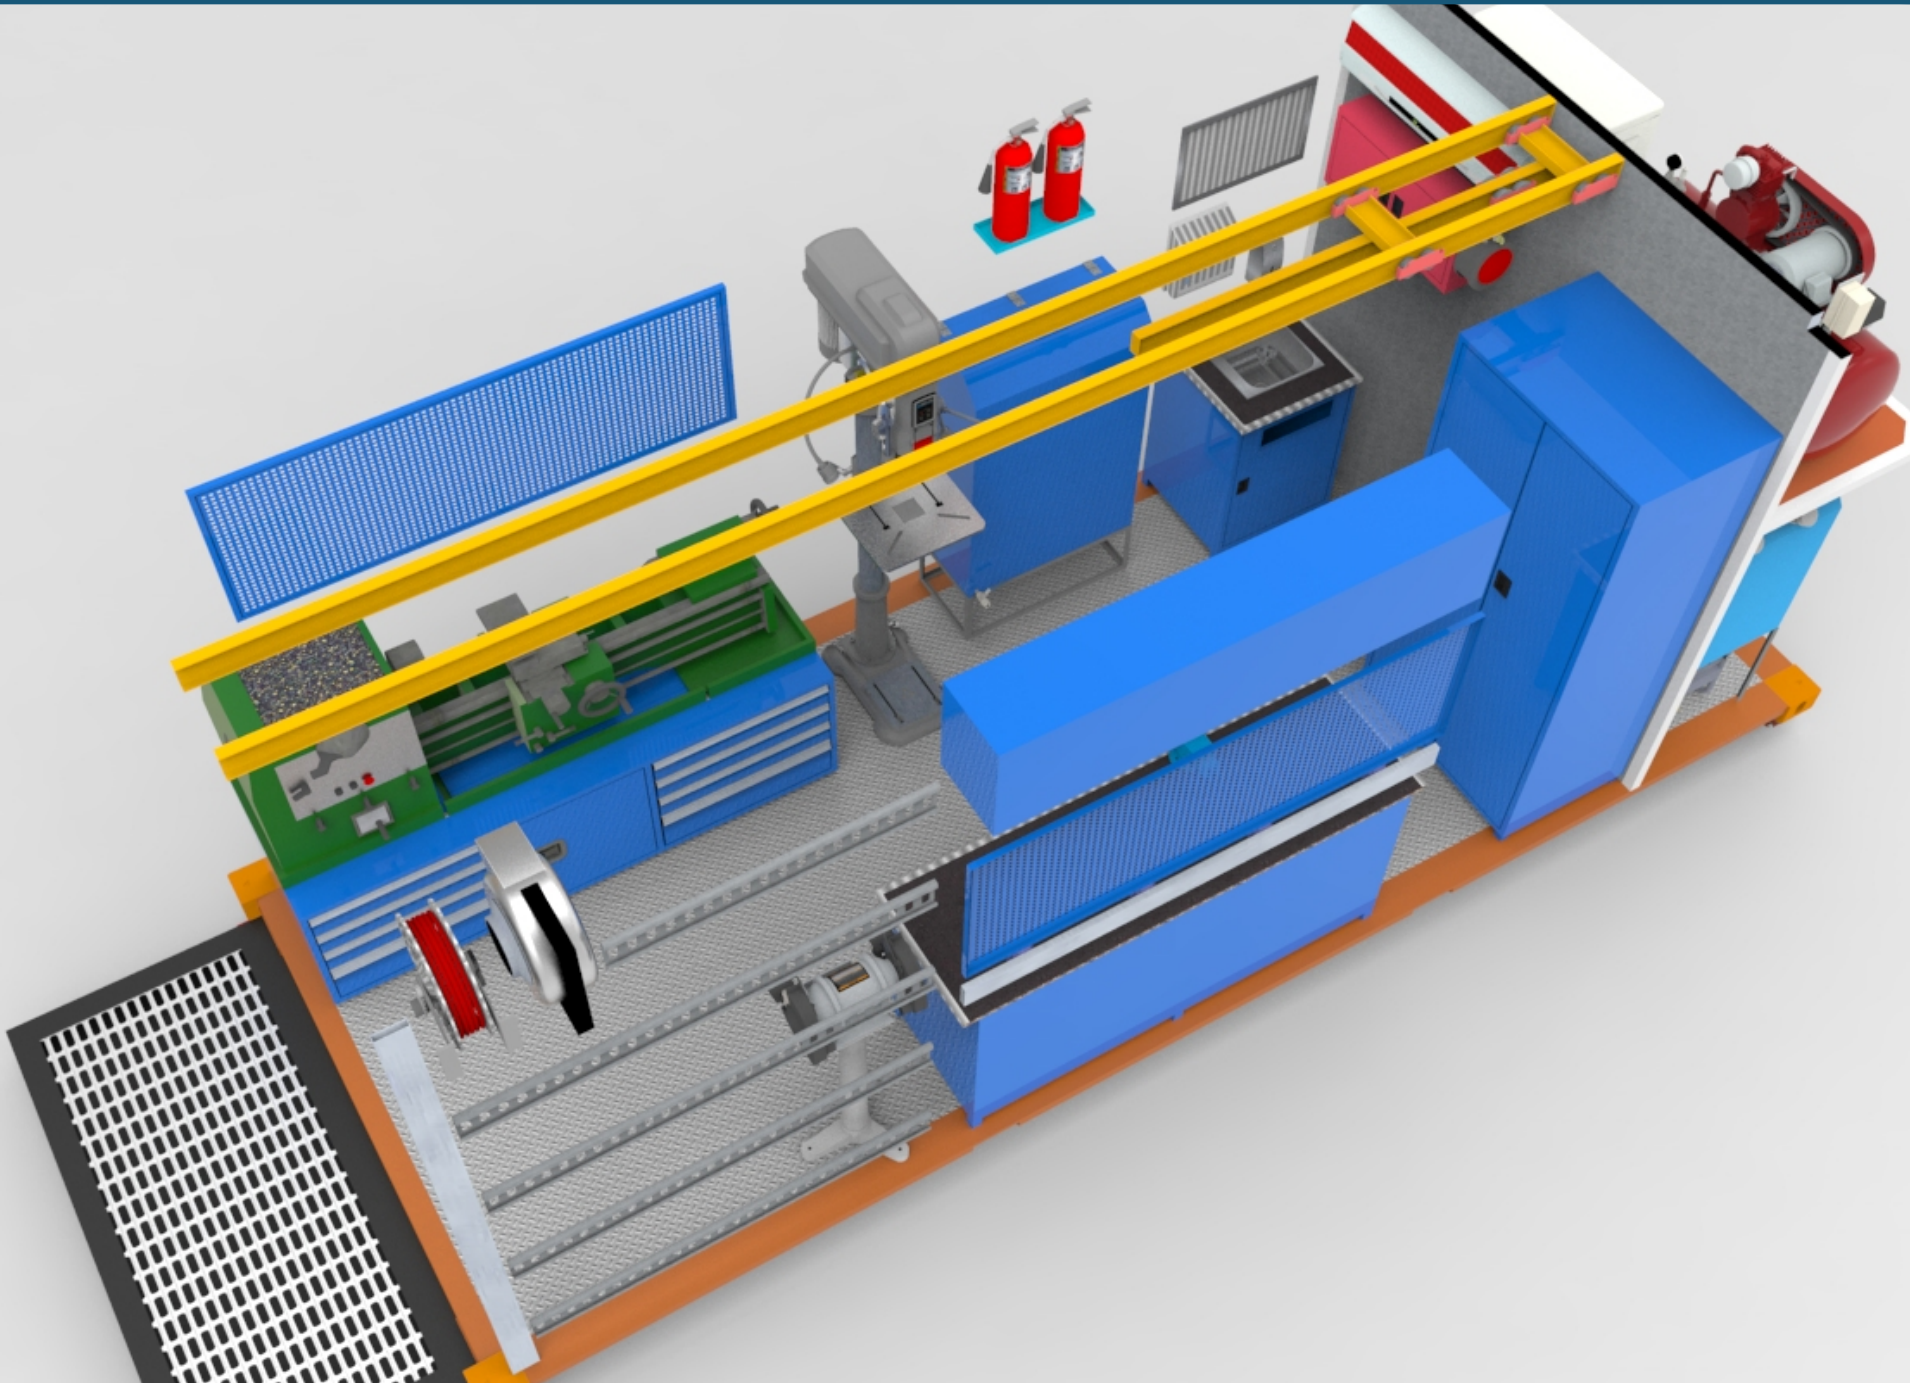

## 20" Container Workshop

Prct. No : 20.019  
Rev. : 000  
Date : 1.09.2020  
Page : 7 / 9

ALURA TRAILER  
P: +90 232 999 95 00  
M :+90 544 242 04 91  
[www.aluratrailer.com](http://www.aluratrailer.com)

[sales@aluratrailer.com](mailto:sales@aluratrailer.com)







## 20" Container Workshop

Prct. No : 20.019  
Rev. : 000  
Date : 1.09.2020  
Page : 8 / 9

ALURA TRAILER  
P: +90 232 999 95 00  
M :+90 544 242 04 91  
[www.aluratrailer.com](http://www.aluratrailer.com)

[sales@aluratrailer.com](mailto:sales@aluratrailer.com)







WOBIFE 2Y2LEW2

ALURA TRAILER

P +90 232 999 95 00 M +90 544 242 04 91  
Mithatpaşa Cad. No: 277/11 İzmir / TURKEY  
[www.aluratrailer.com](http://www.aluratrailer.com) [sales@aluratrailer.com](mailto:sales@aluratrailer.com)



	<p>MWS 20' Contanier Body - 6 Mt.</p>	<p>1</p>
	<p>Sheet metal        Bench With 12 Drawers and Cabinet.        50x50x1,5 mm profile framework box.        It is electrostatic powder coated.        There are rubber shoes at the feet in order to prevent a scratching of the floor.        Width: 1500 mm,        Depth: 750 mm,        Height: 825 mm +680 mm +450 mm        6/6 12 drawer drawers        Double-lid cupboard at bottom        Upper cupboards 4        2.000 X 850 X 1.800</p>	<p>1</p>
	<p>Industrial Cabinet        Drawers : 8 pc.        Height Adjustable Shelves : 3 pc.        Width : 1010 mm        Depth : 615 mm        Height : 2.000 mm        These are leaf door, heavy load cabinets.        They are welded, stabşe 1.20 mm sheet constructions.        Electrostatic powder coated.        There are round edged, embedded stripe channel, eloxal aluminium lugs and there are plastic taps on the lug heads.</p>	<p>1</p>
	<p>Size: 150 mm        Jaw Width: 150 mm        Total Length: 420mm        Arvil Size: 70 x 100 mm        Vise Height: 170 mm</p>	<p>1</p>
	<p><b>Generator Diesel</b>        Standby/Prime Power: 33 kVa / 30 kVa        Standard Voltage: 400/230 V / 3 Phase        Engine Bran: Perkins        Engine Model: 1103A-33TG1        Alternator: Sincron        RPM: 1500 rpm.        Frequency: 60 Hz.        Water Cooling</p>	<p>1</p>
	<p>Piston Compressor        Air Tank: 100 lt        Engine Power: 1.5 hp        Air Suction: 210 lt / min        Pressure: 8 bar        Speed: 980 rpm</p>	<p>1</p>



	<p>Cooling Capacity: 18.000 btu          Input Voltage: 230/50 V / Hz          Current Cooling: 6.3 / 6.9 A          Required Fuse: 7 A</p>	<p>1</p>
	<p>Thermostatic Heat Control: Yes          Refrigerant: R410a</p>	<p>1</p>
	<p>Metal Prisma Tank 2 mm / 200 Lt.</p>	<p>1</p>
	<p>Length hose: 11 m          Length hose con. : 1.5 m          Hose diameter: 8 x 12 mm          Inlet connection thread: G 1/4 "bar          Max working pressure: 10 bar</p>	<p>1</p>
	<p>220 V output adapter          Auto Loopback          Thermoplastic Cable</p>	<p>1</p>
	<p>3 socket outlet</p>	<p>1</p>
	<p>Grinding disc diameter: 200 mm          Idle speed: 295 rpm          Disc widths: 25 mm          Disc hub diameter: 32 mm          Input power: 400 W</p>	<p>1</p>
	<p>Distance Between Cntr. : 1.000 Mm          Max .Swing Over Bed : 360 Mm          Max. Swing Over Gap : 475 Mm          Max .Swing Over Cross : 210 Mm          Width Of Bed : 190 Mm          Tool Section : 20 X 25 Mm          Spindle Hole Diameter : 38 Mm          Spindle Tapermt : 5          Spindle Speeds And : 70-2000 D/Dk.          Steps : 8          Longitudinal Feeds : 1.044 Mm          Threads Range Inch : 3½ - 80 Tpi          Metric : 0.45 - 10Mm          Tailstock Spindle Travel : 95 Mm          Tailstock Spindle Taper : 3 Mt          Motor Power : 1.5 Kw          Sizes : 185X70X125Cm (Lx Wx H)</p>	<p>1</p>

	<p>25 mm Max. drilling capacity          MK 4 Spindle taper          4 Number of spindle speeds          140-900rev/min Range of spindle speeds          80 mm Quill diameter          140 mm Quill vertical travel-Drilling depth          150-685 mm Dist .from the spindle nose to the table/min,max          1120 mm Dist. from the spindle nose to the base plate          370 mm Dist. from the spindle nose to the column axis          115 mm Column diameter 115 mm          Number and width of grooves 2x14 T-type x min          410x410 mm Work table (WxL)          420x650 mm Base table (WxL)          0,75 Kw Power of main drive motor          550x800x1800 mm Overall dimensions</p>	<p>1</p>
	<p>Capacity: 1.000 Kg          Lifting height: 20/10 M          Lifting speed: 10/5 M / Min          Rope length: 20 M          Engine power: 930 W          Voltage: 220-50 V / Hz</p>	<p>1</p>
	<p>Outdoor Lighting          7 inch / 51 W /          Aluminum Case</p>	<p>12</p>
	<p>6 kg fire extinguisher          refillable</p>	<p>2</p>
	<p>Pressure Regulator          Air Inlet 1/2 "          Filter 20U          Working Pressure 05-9.9 Atu          Working temperature 5-60 ° C          Water Capacity 80 MI          Air Permeability 2200Lt / Dk</p>	<p>1</p>
	<p>Fast Coupling</p>	<p>1</p>
	<p>360 degree rotation capacity          Hood that can rotate 360 degrees and can be tilted in all directions          Complete with wall mounting kit and all connection apparatus          Voltage: 230 V          Power: 50 Hz          Speed: 2630dd          Air Flow: 1,130 m3 / h          Throat Diameter: Ø = 248 mm          Sound: 46dB          Weight: 20 Kg</p>	<p>1</p>
	<p>Control panel of all equipment.          Generator / Mains power connection.</p>	<p>1</p>