

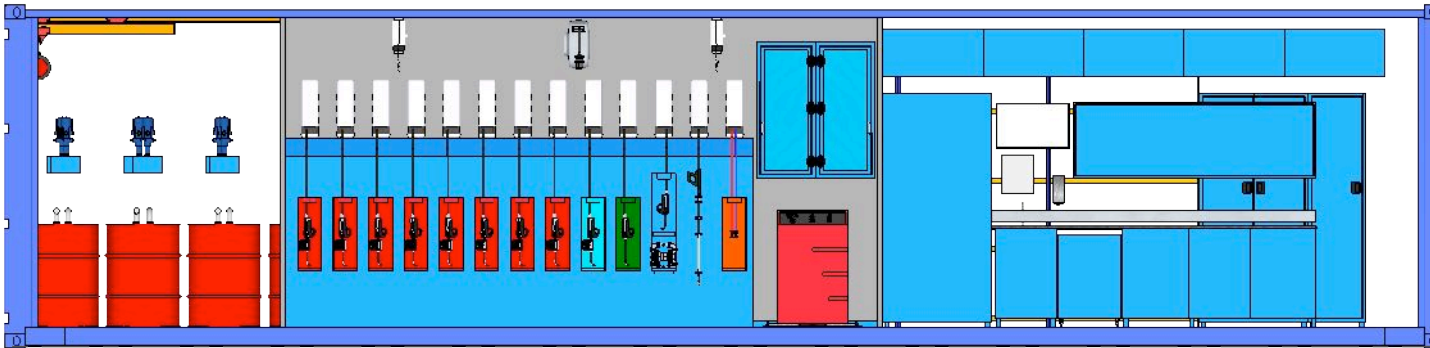
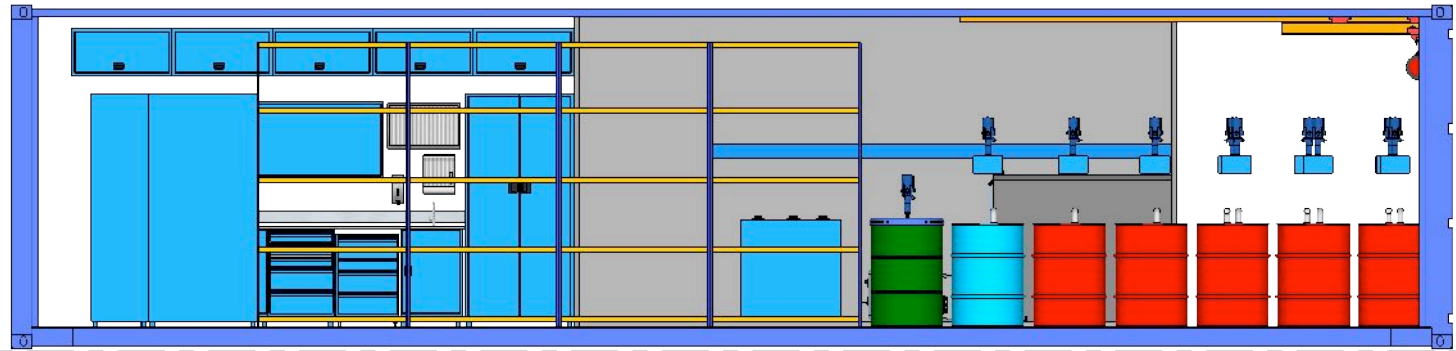


Project / Model
21.026
40' Lubrication Service Container

Explanation
40' HQ ISO Container

Info
Date : 07.08.2021
Rev. : 03 / 30.08.2021
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A 01

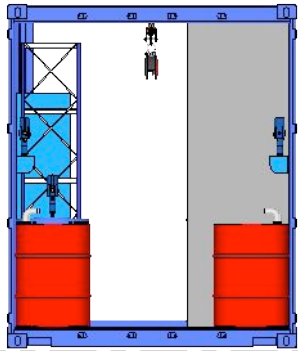

Project / Model
21.026
40' Lubrication Service Container


Explanation

...

Info

Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 02

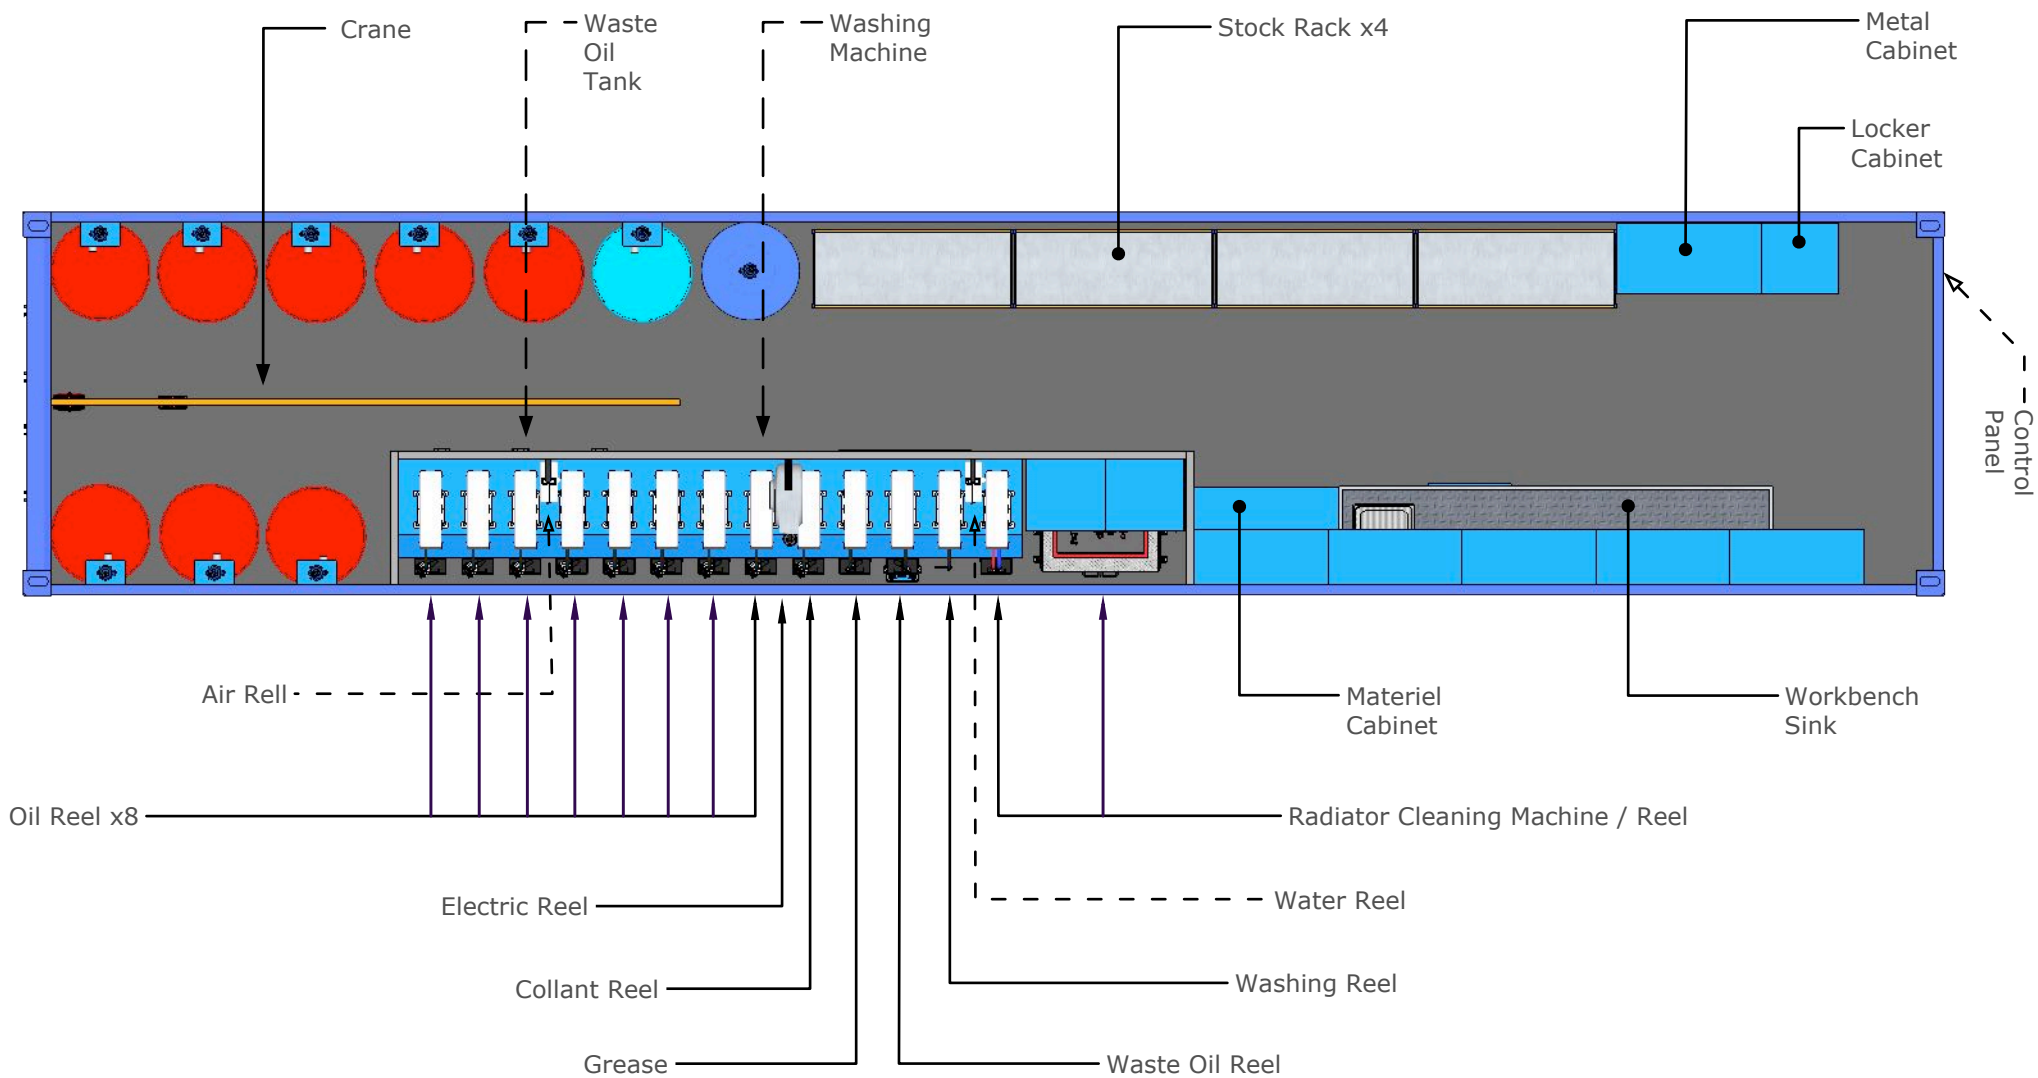


Project / Model
21.026
40' Lubrication Service Container

Explanation
 ...

Info
 Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 03

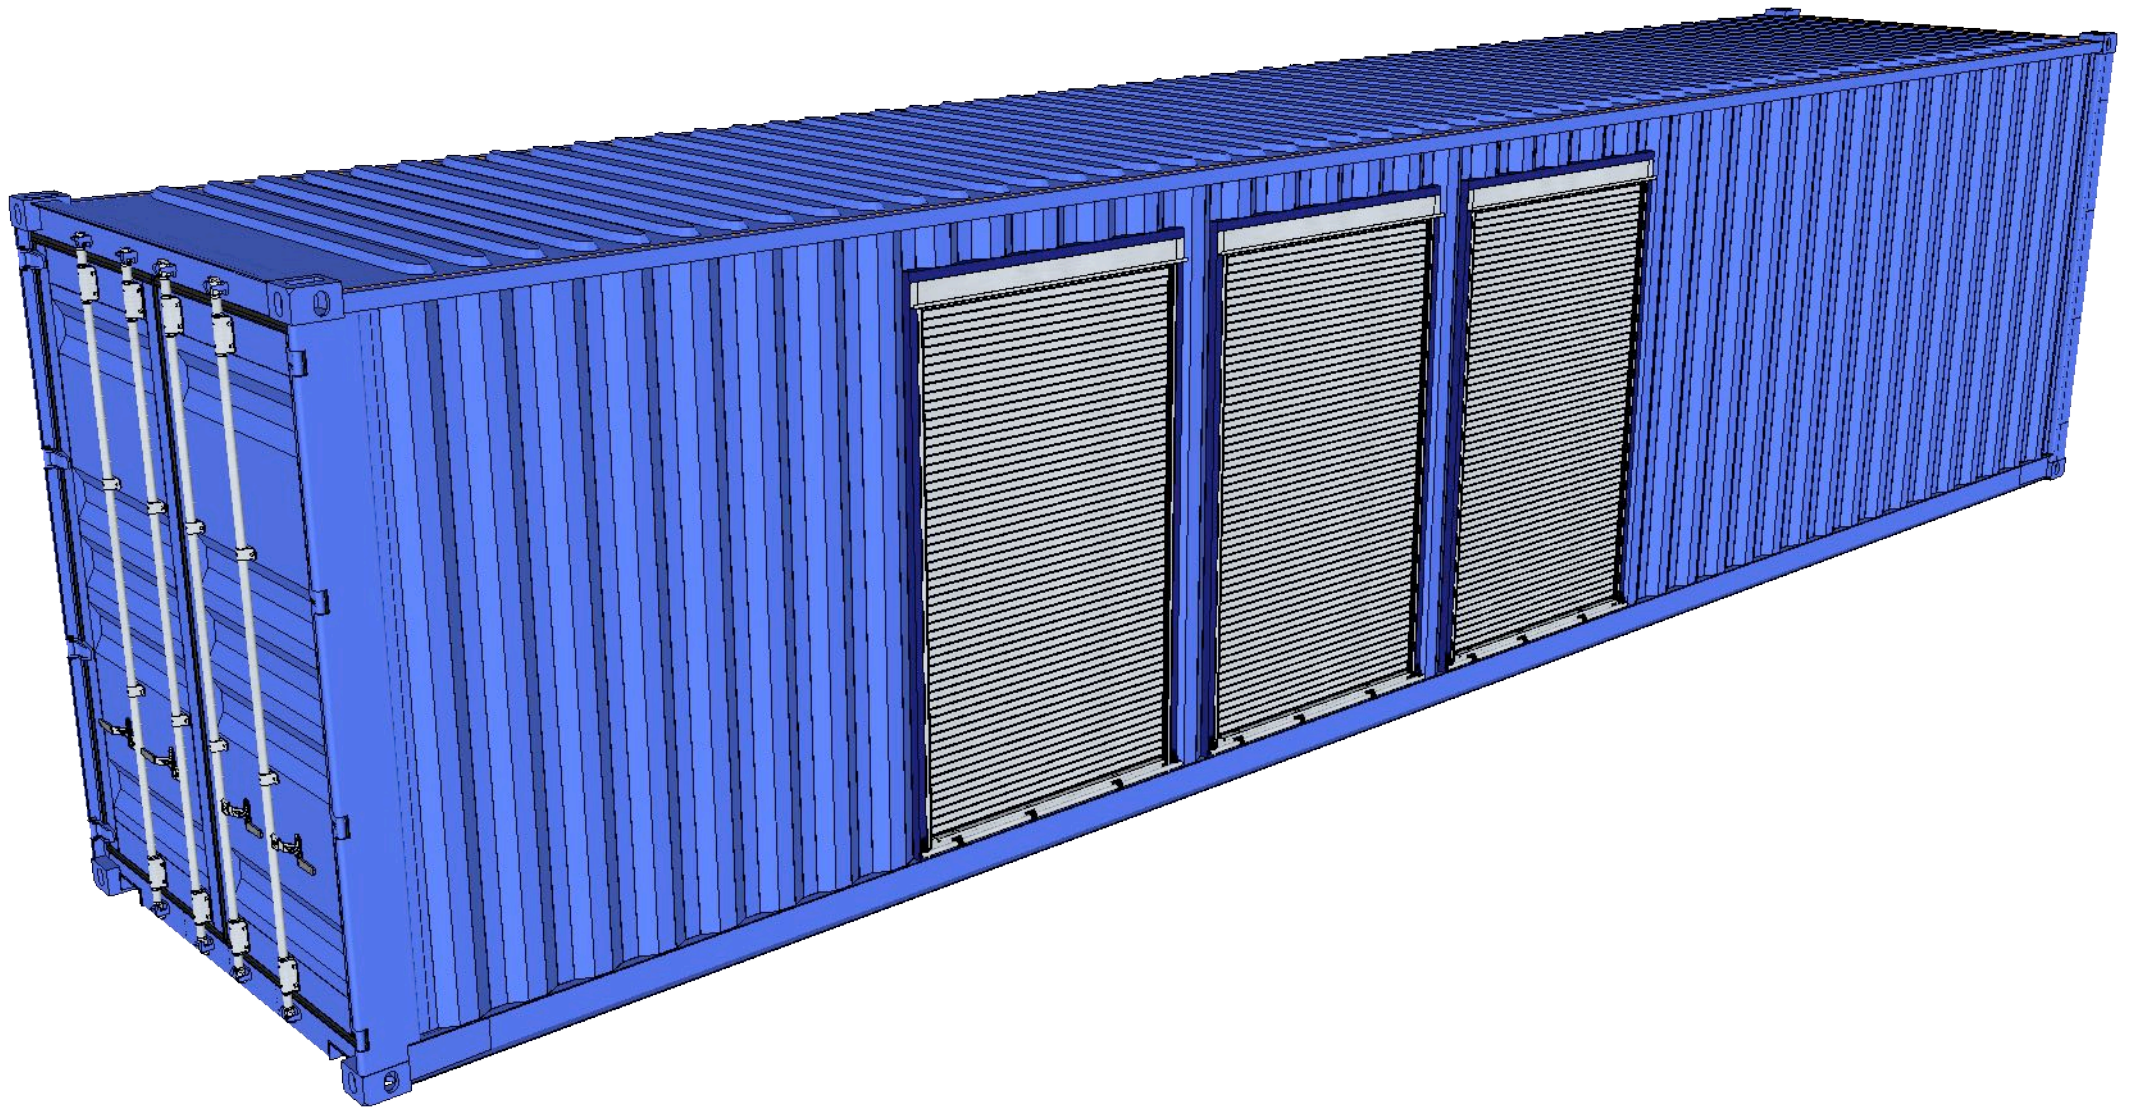

Project / Model

21.026
40' Lubrication Service Container


Explanation

...

Info

Date : 07.08.2021
Rev. : 03 / 30.08.2021
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A 04

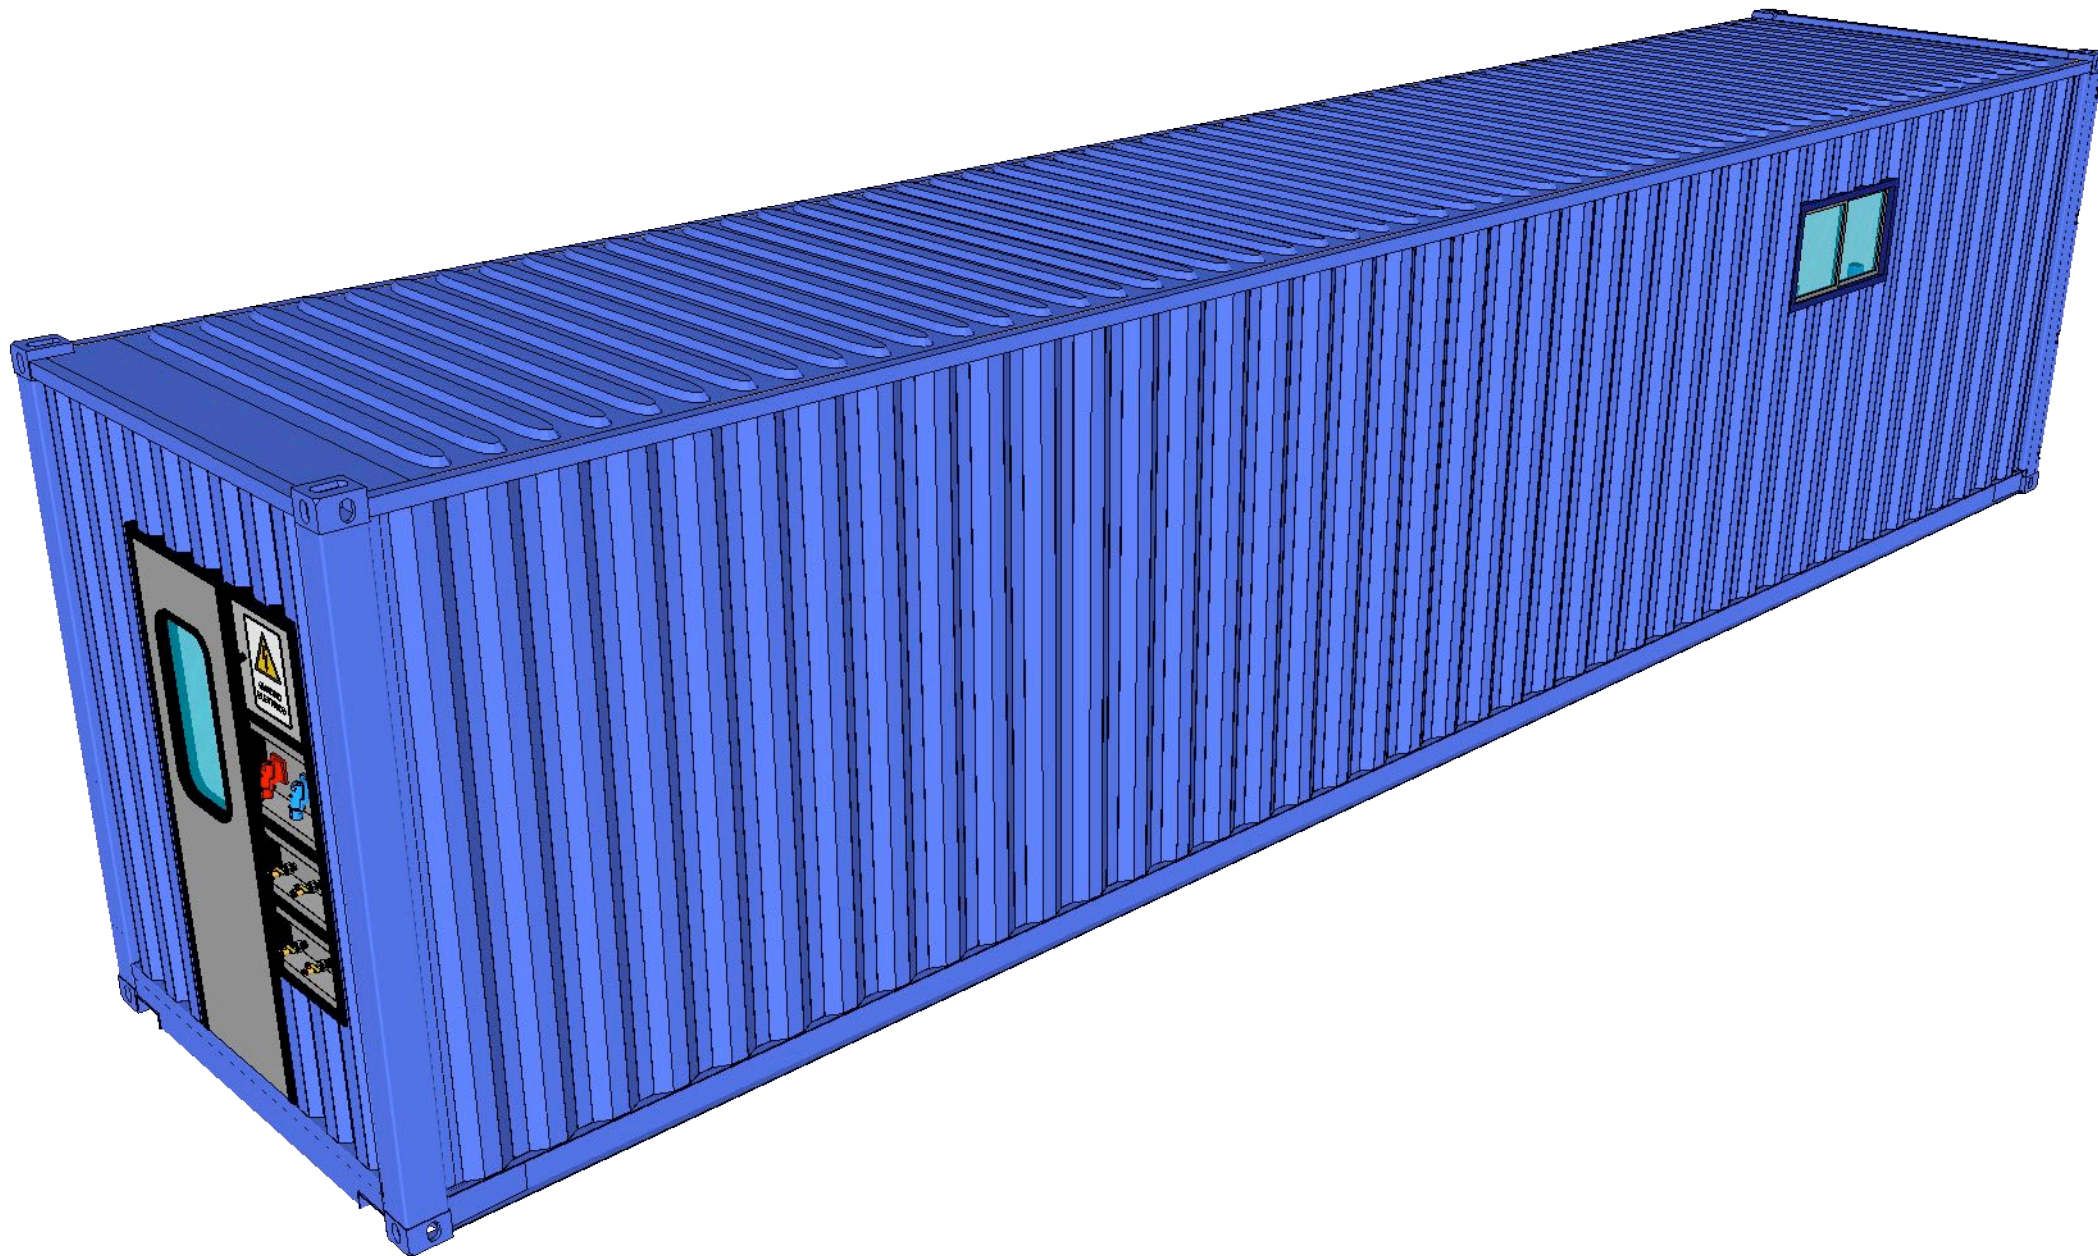

Project / Model

21.026
**40' Lubrication Service
Container**


Explanation

...

Info

Date : 07.08.2021
Rev. : 03 / 30.08.2021
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A 05

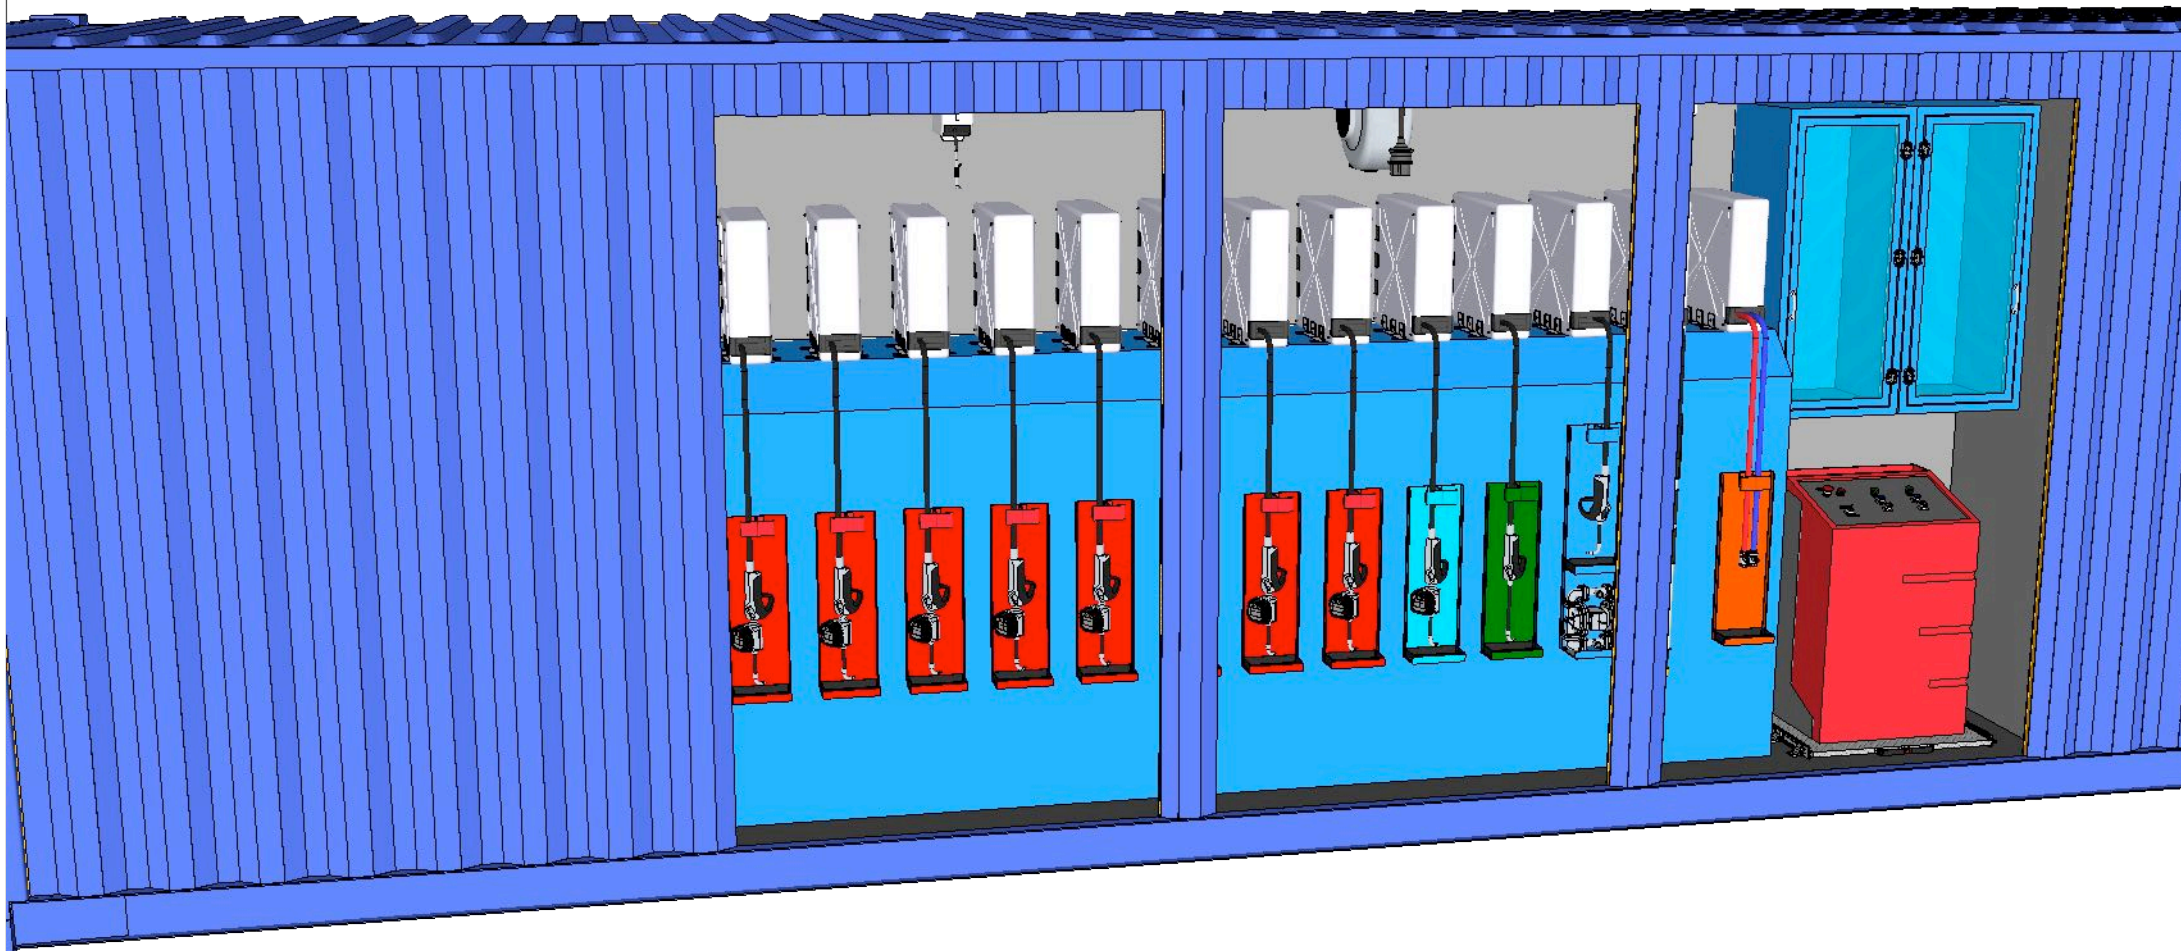

Project / Model

21.026
40' Lubrication Service Container


Explanation

...

Info

Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 06

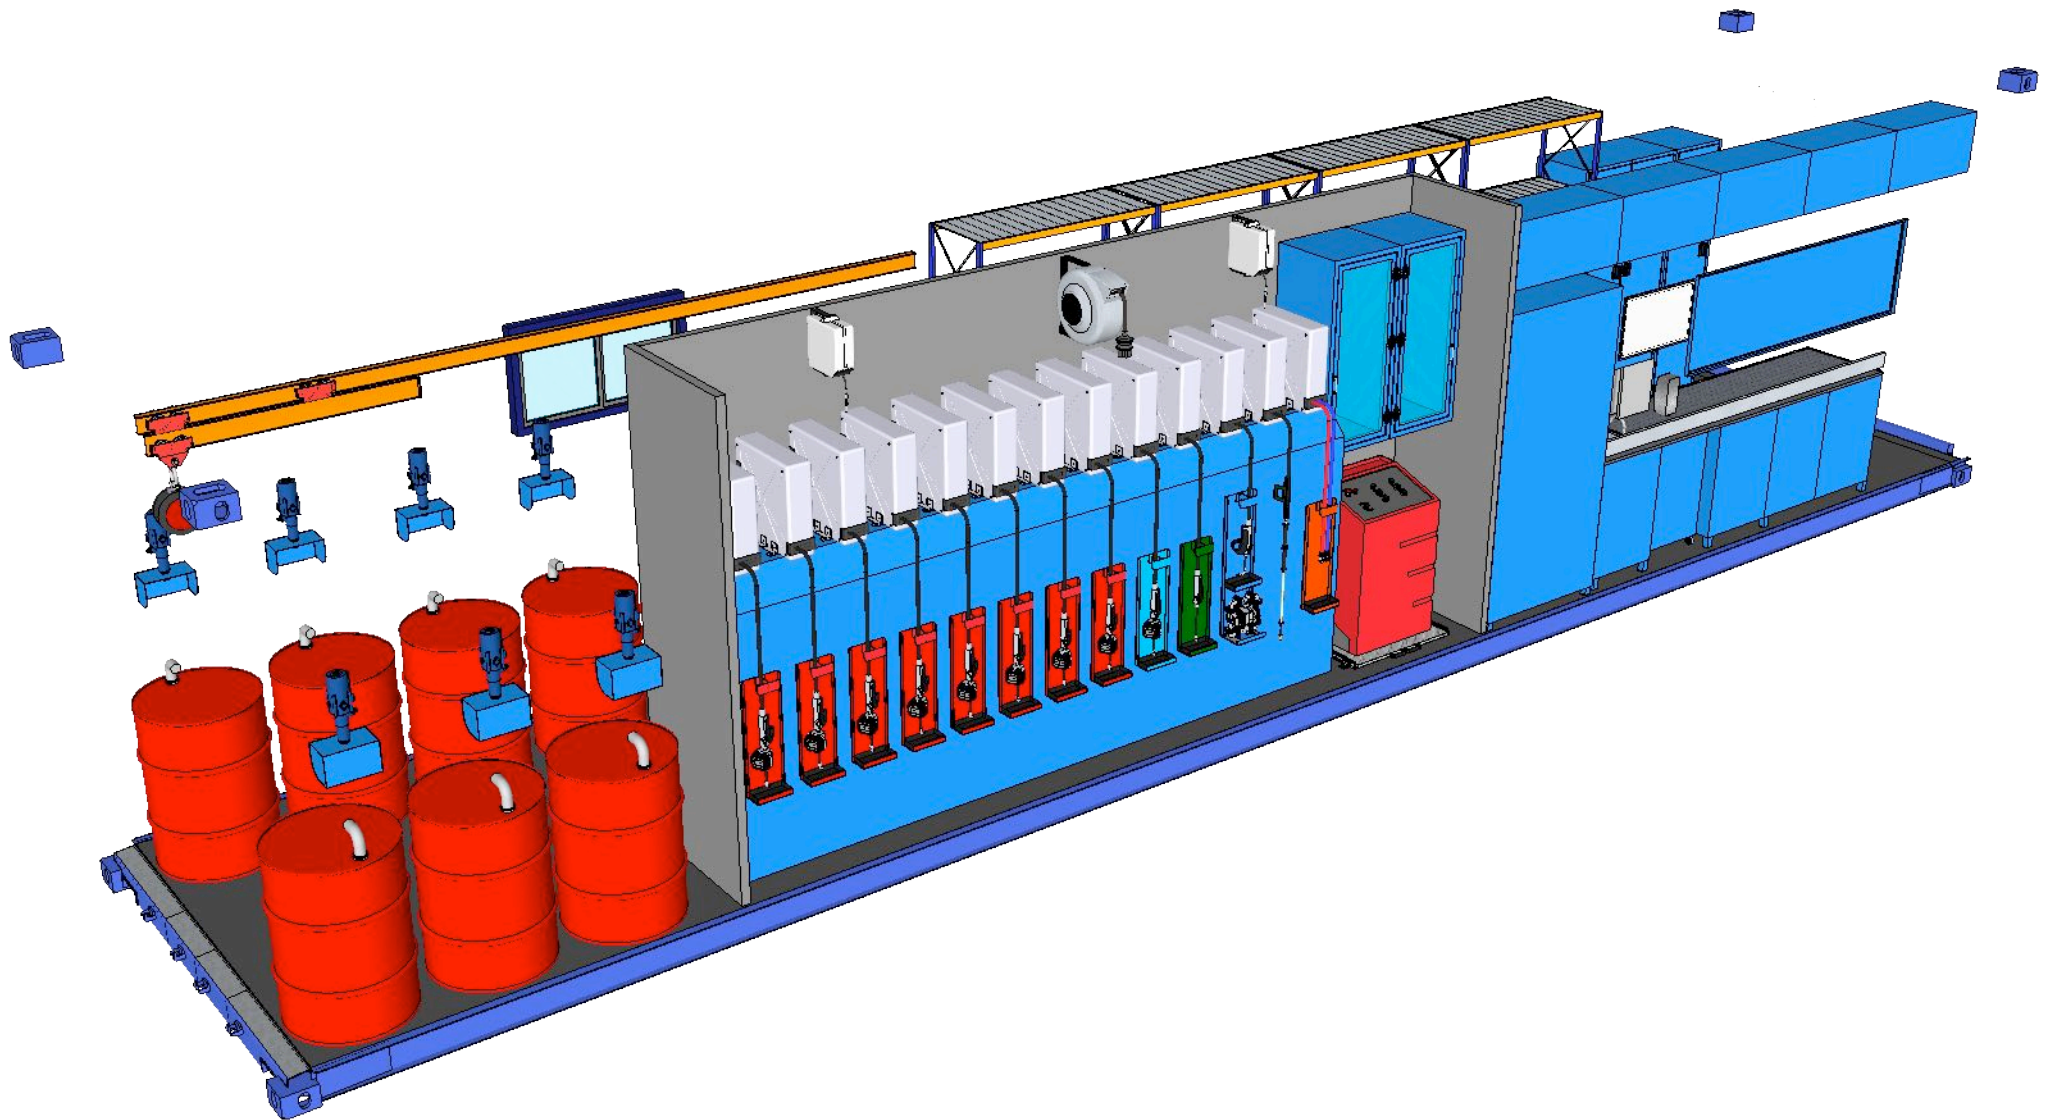

Project / Model
21.026
40' Lubrication Service Container


Explanation

...

Info

Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 07

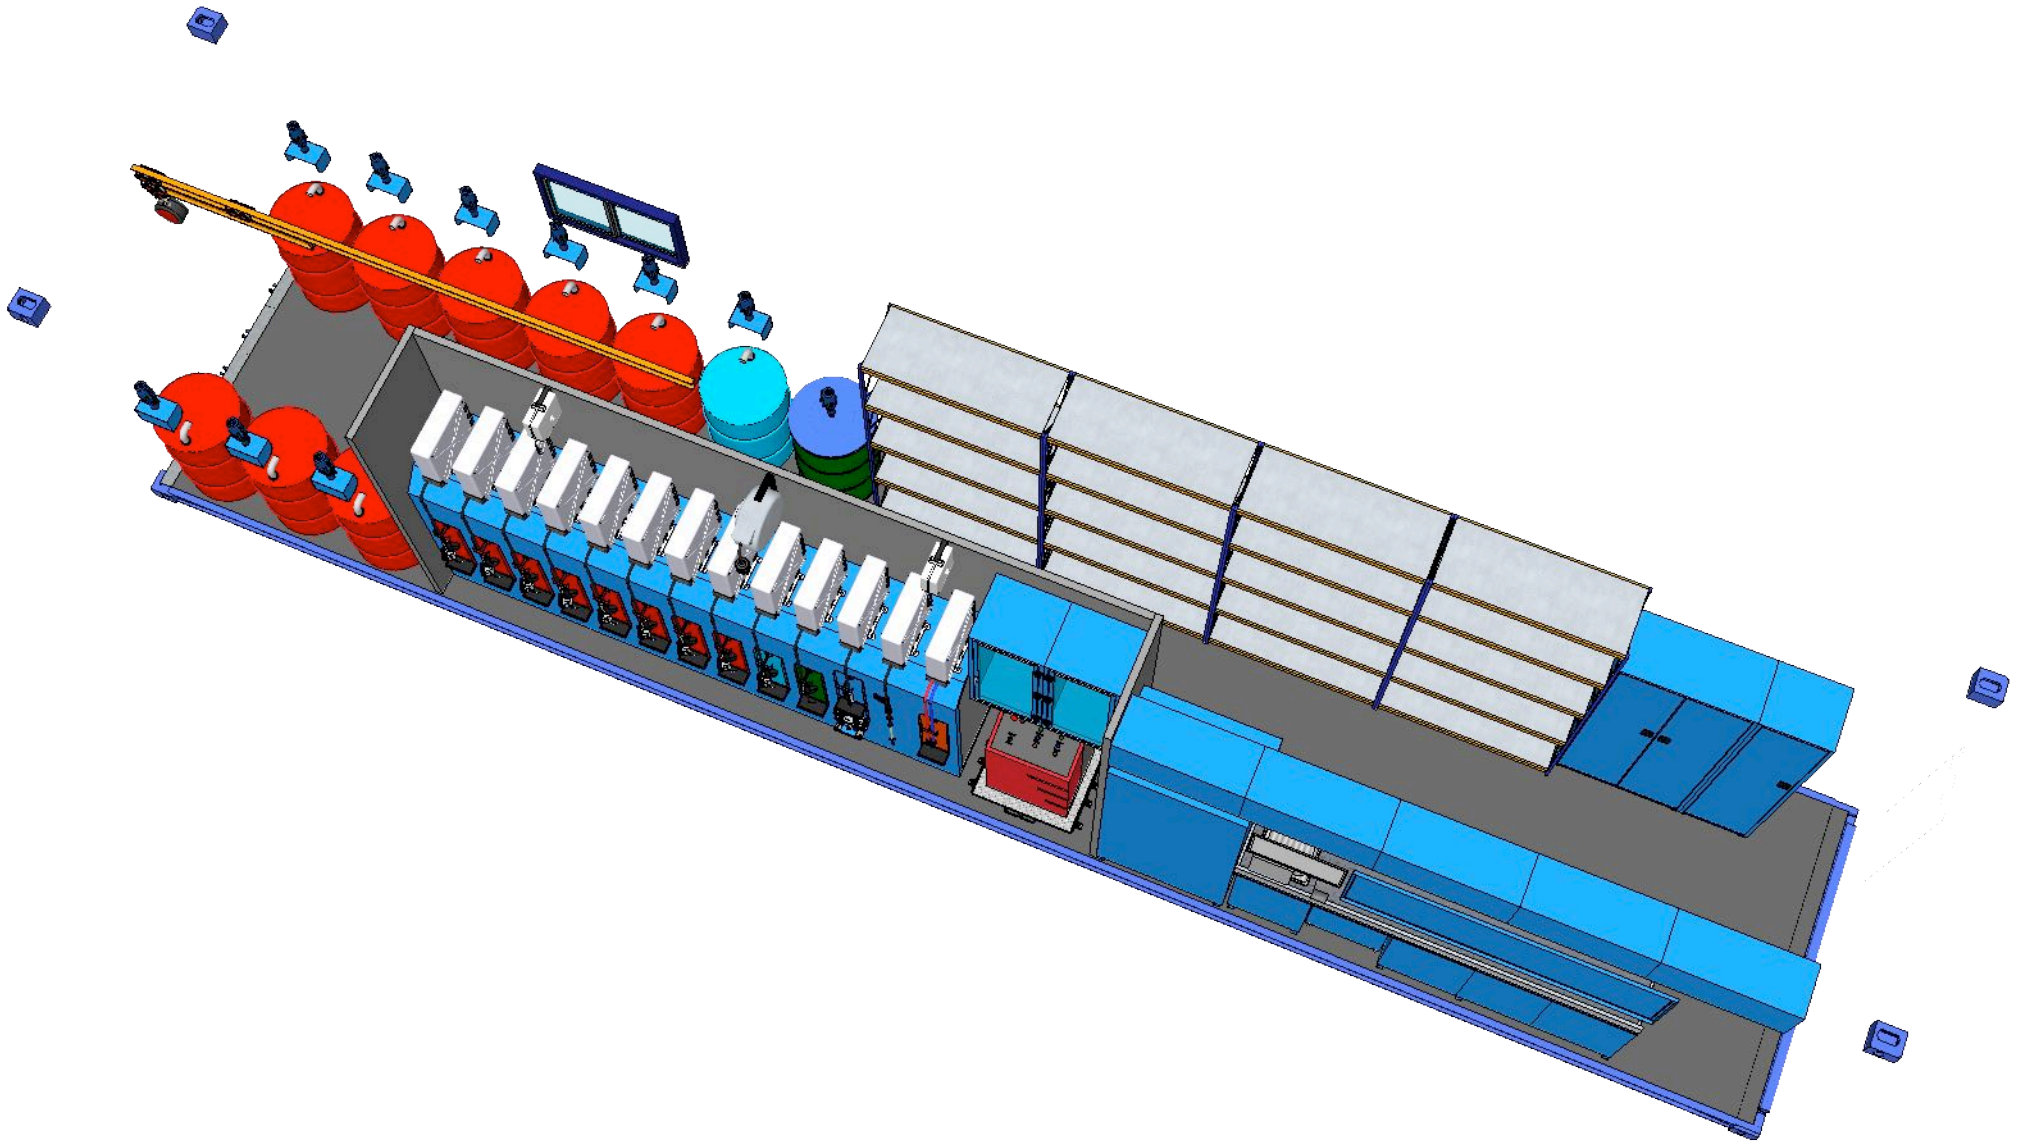


Project / Model
21.026
40' Lubrication Service Container

Explanation
 ...

Info
 Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 08

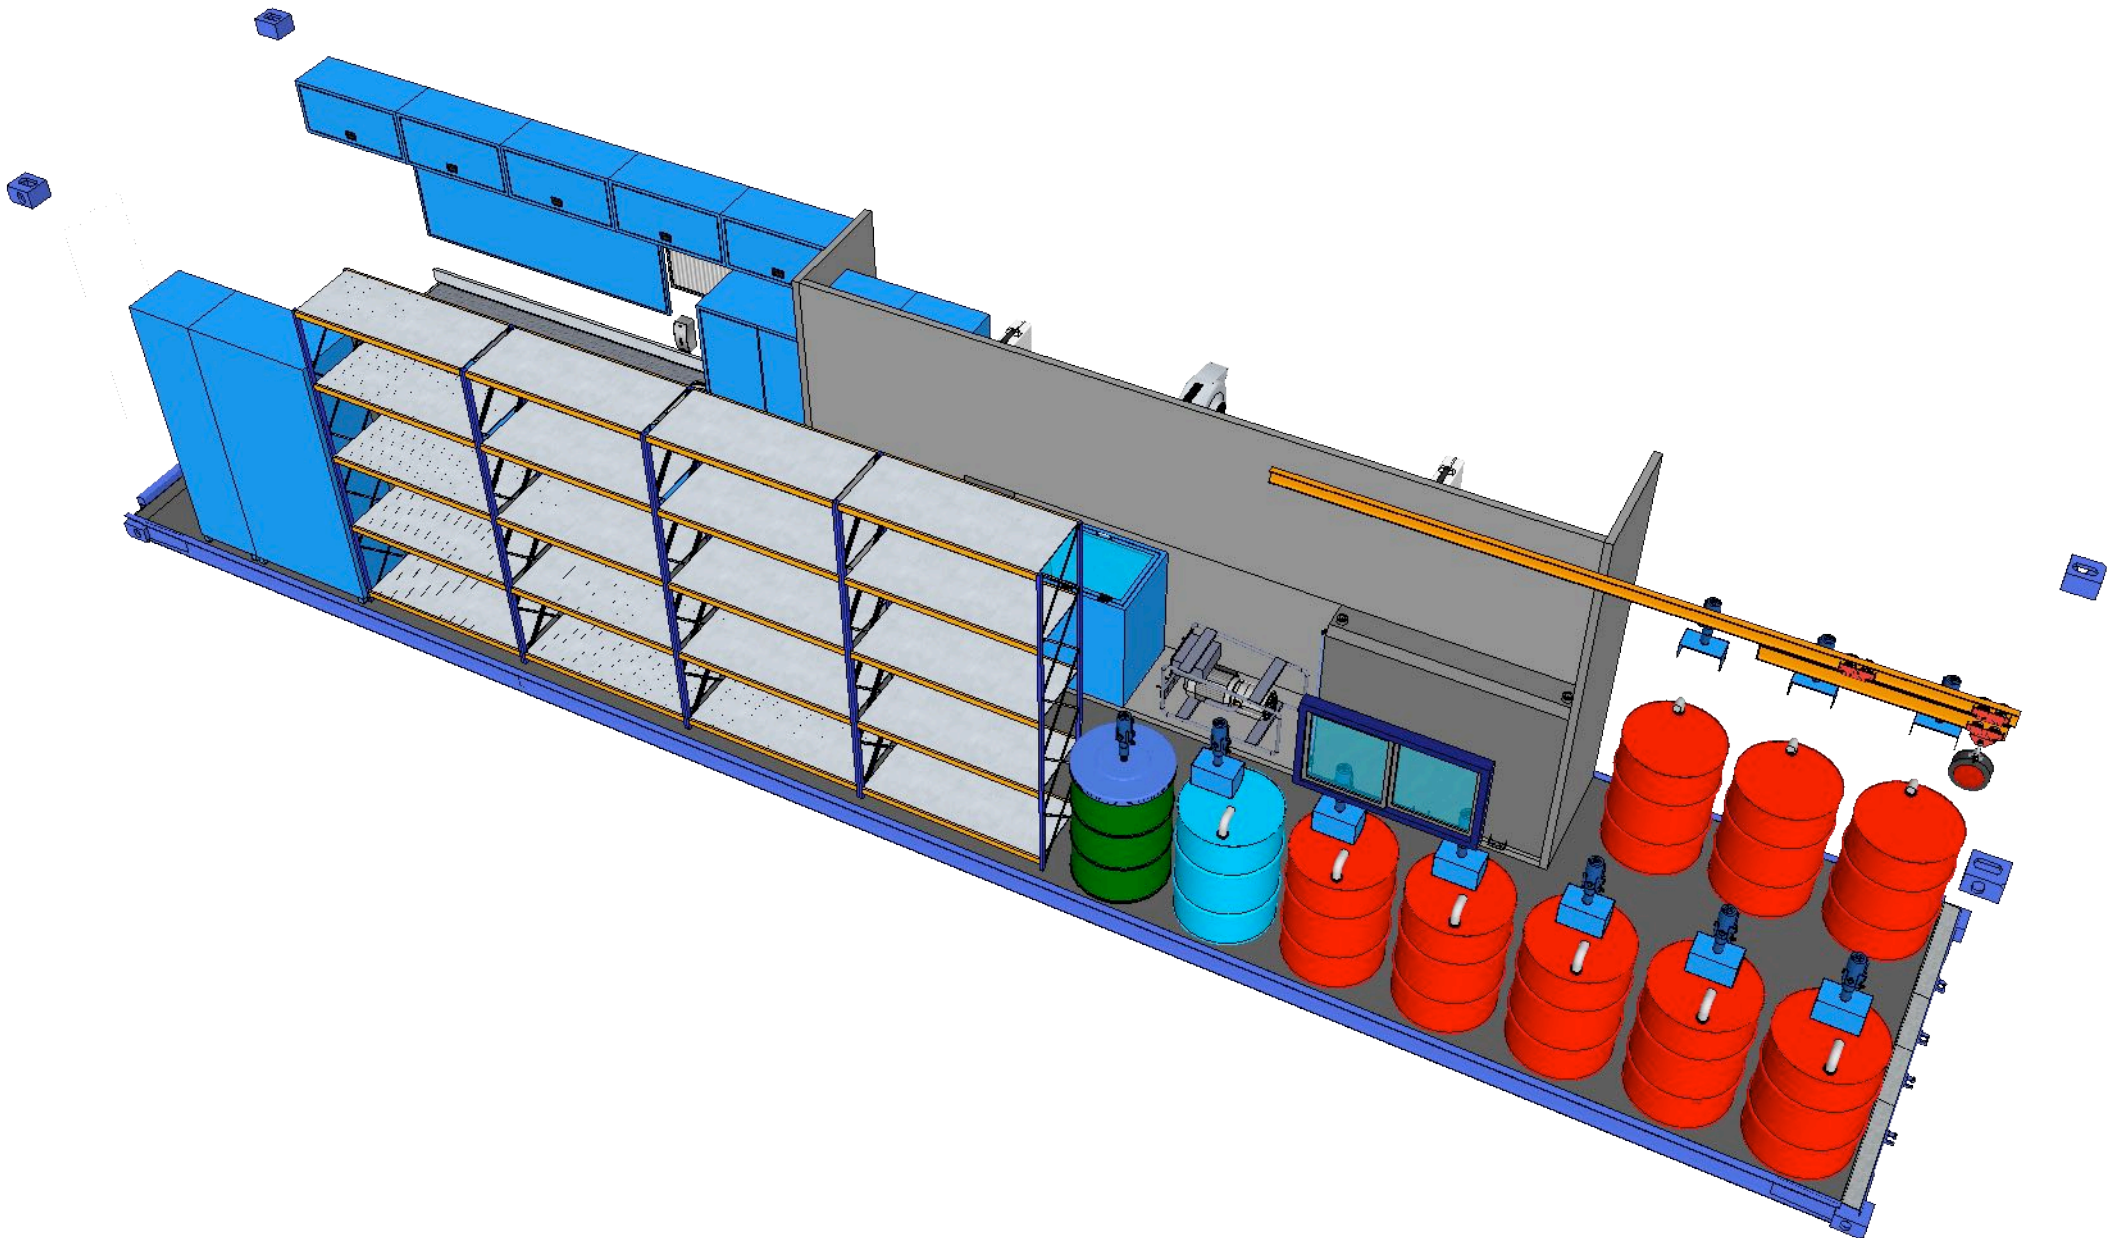


Project / Model
21.026
40' Lubrication Service Container

Explanation
 ...

Info
 Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 09

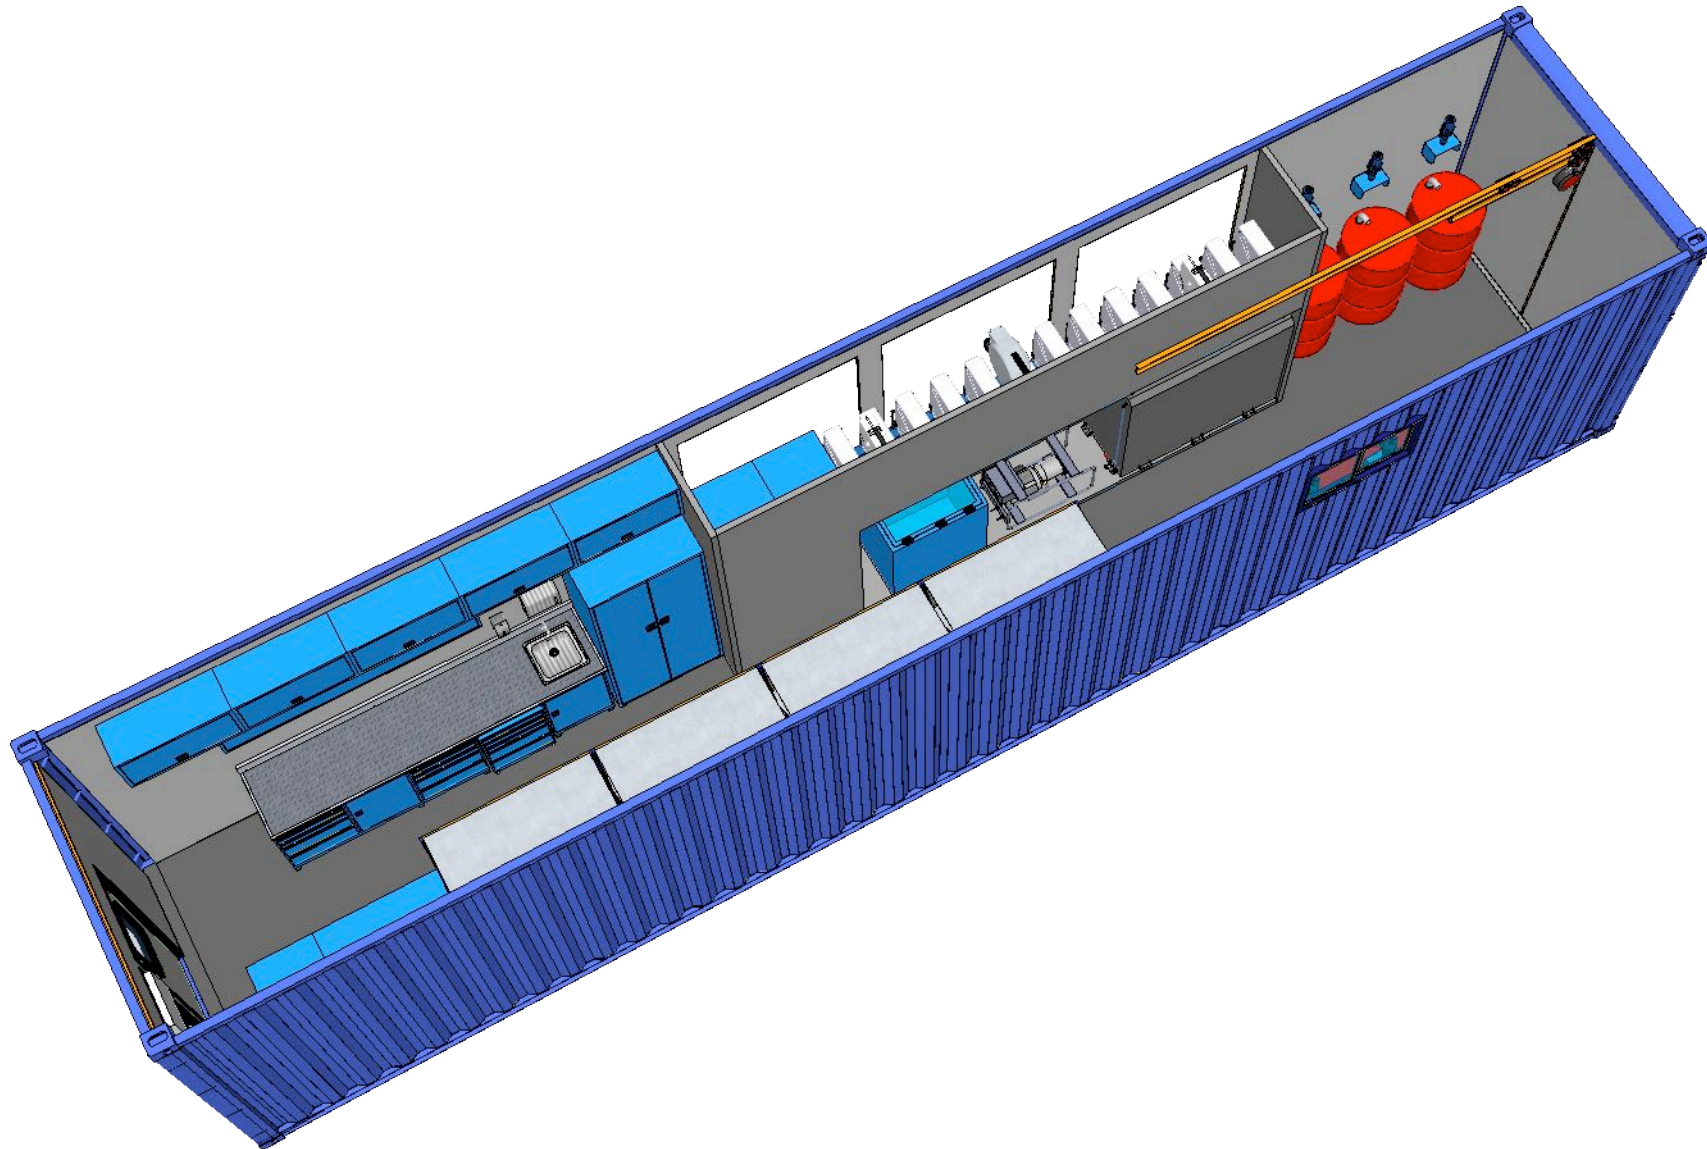


Project / Model
21.026
40' Lubrication Service Container

Explanation
 ...

Info
 Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 10

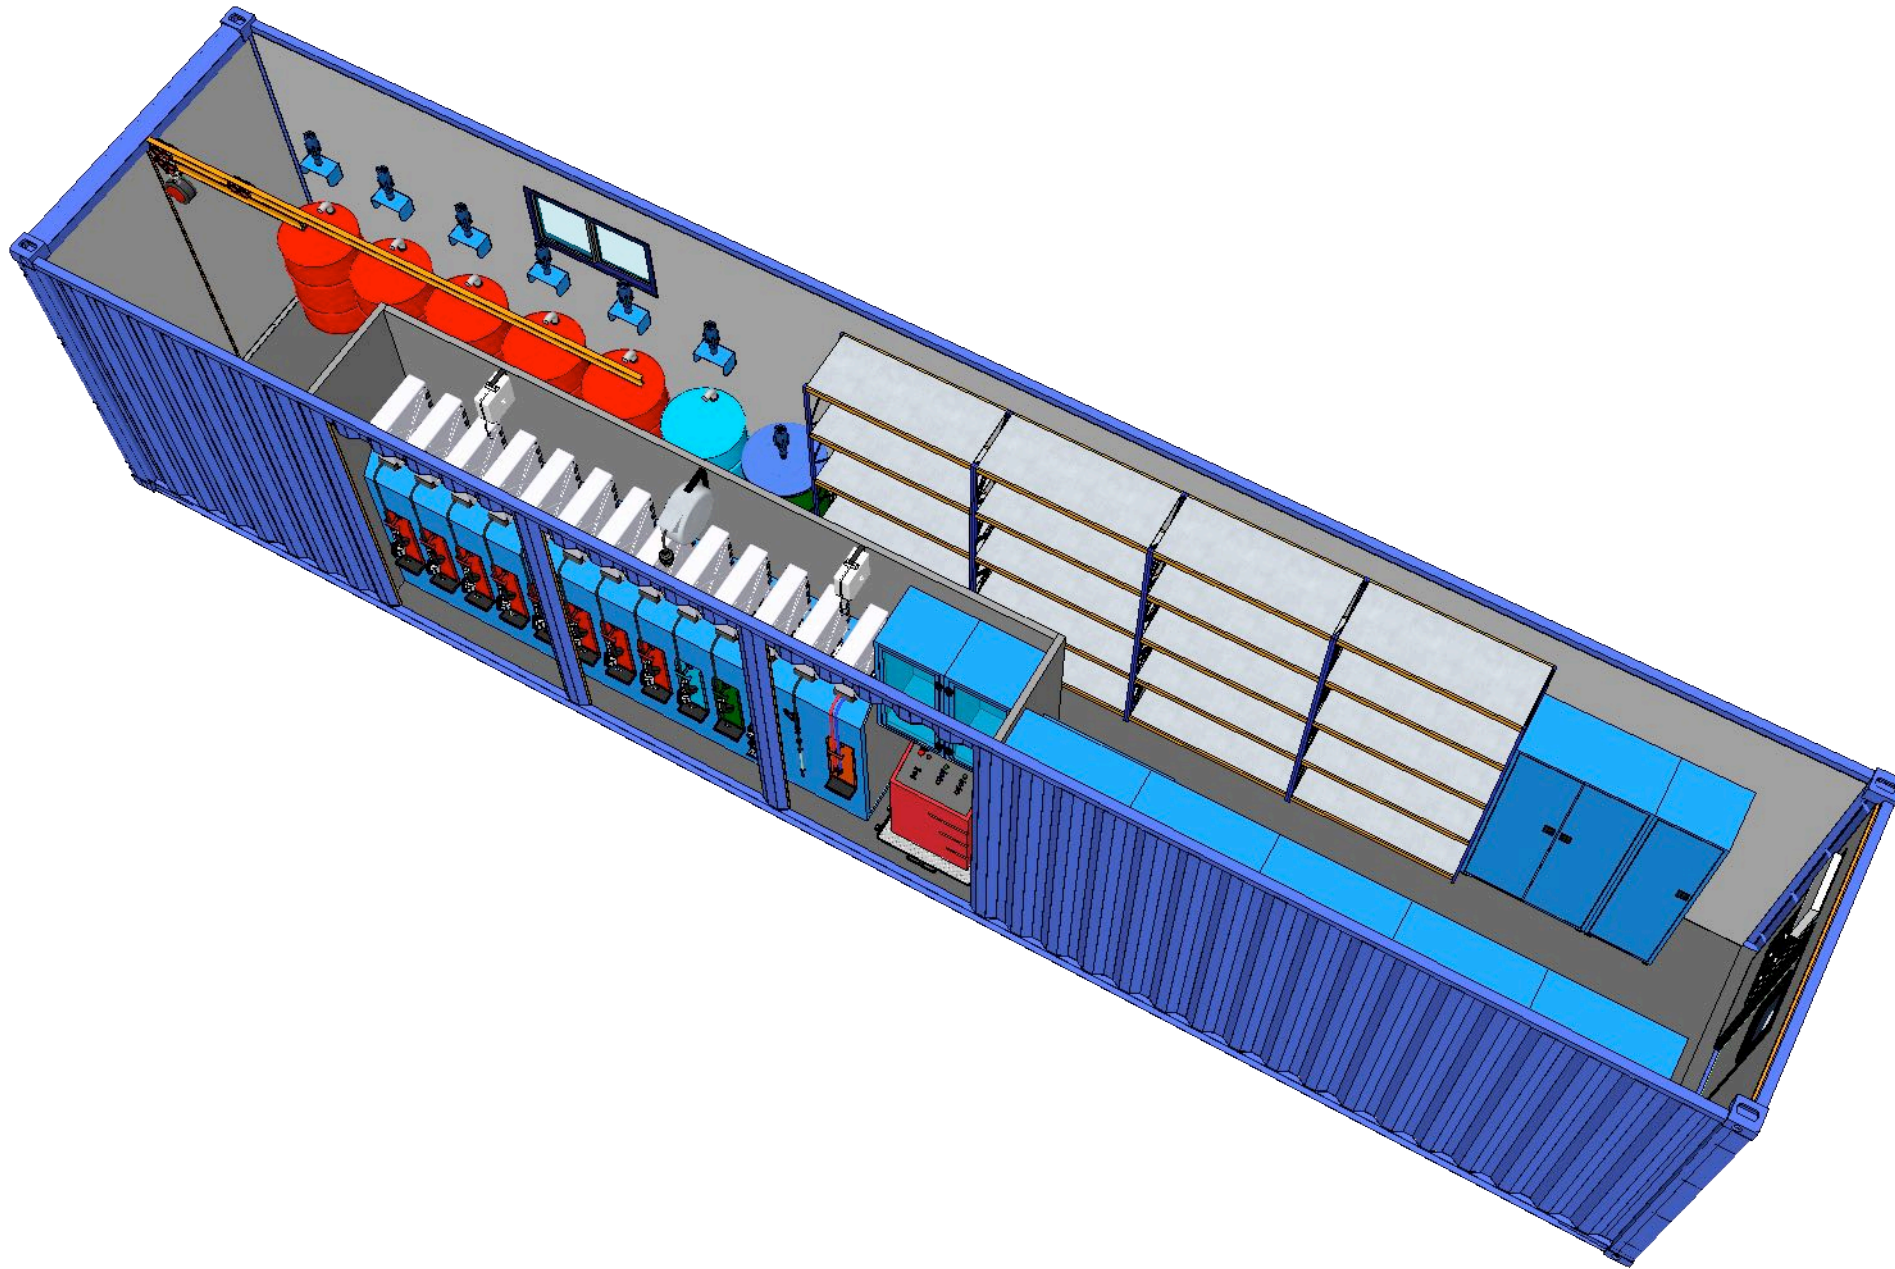

Project / Model
21.026
40' Lubrication Service Container


Explanation

...

Info

Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 11

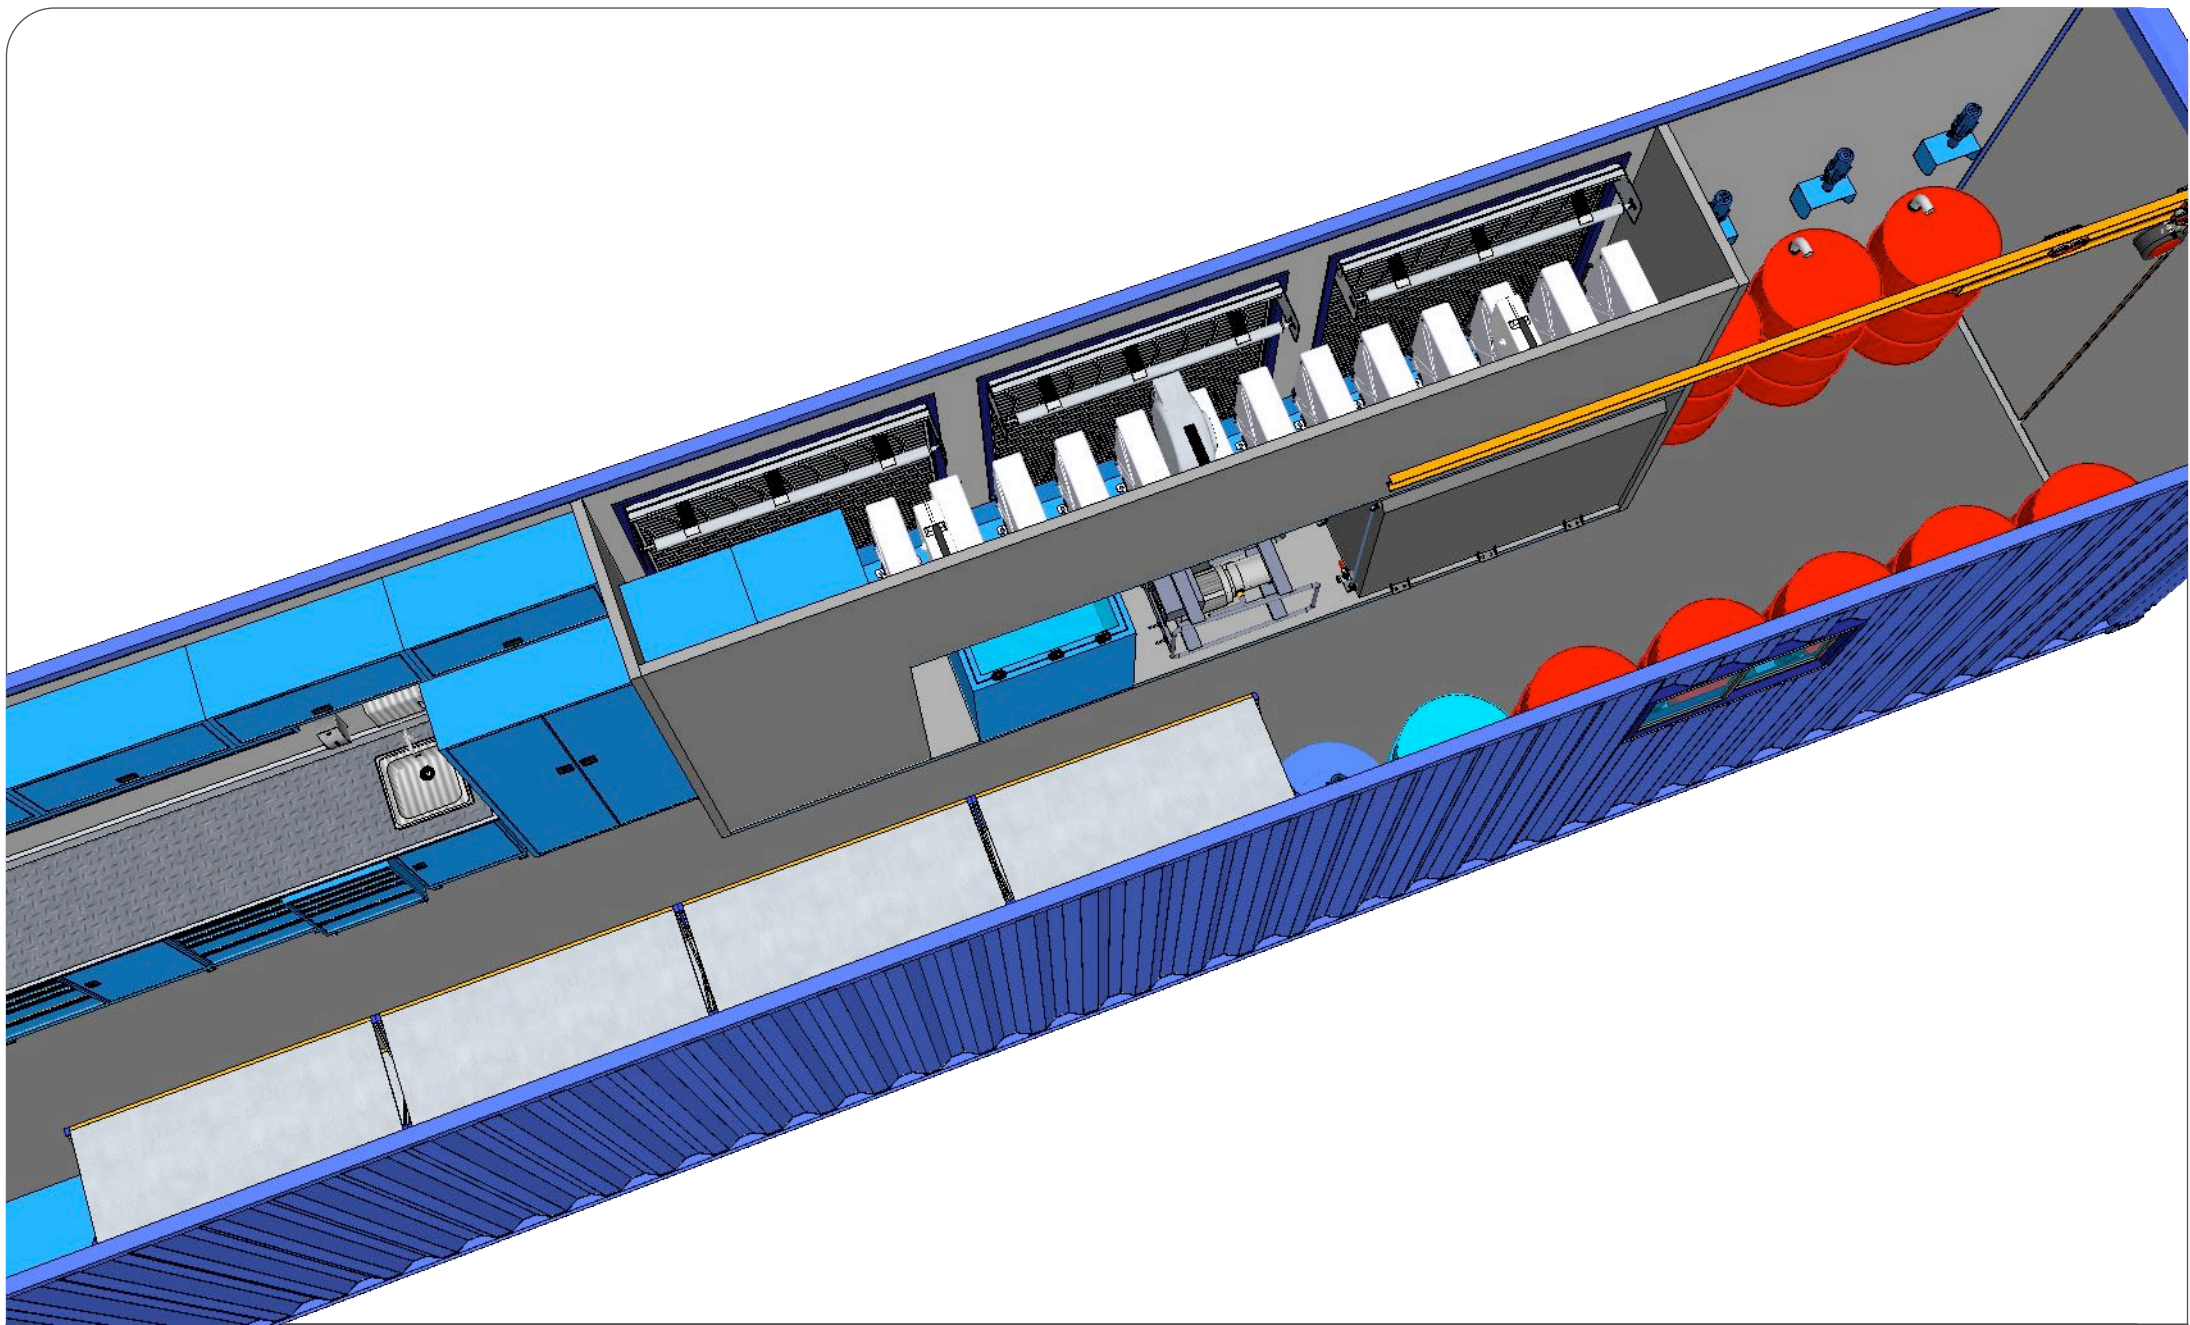


Project / Model
21.026
40' Lubrication Service Container

Explanation
 ...

Info
 Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 12

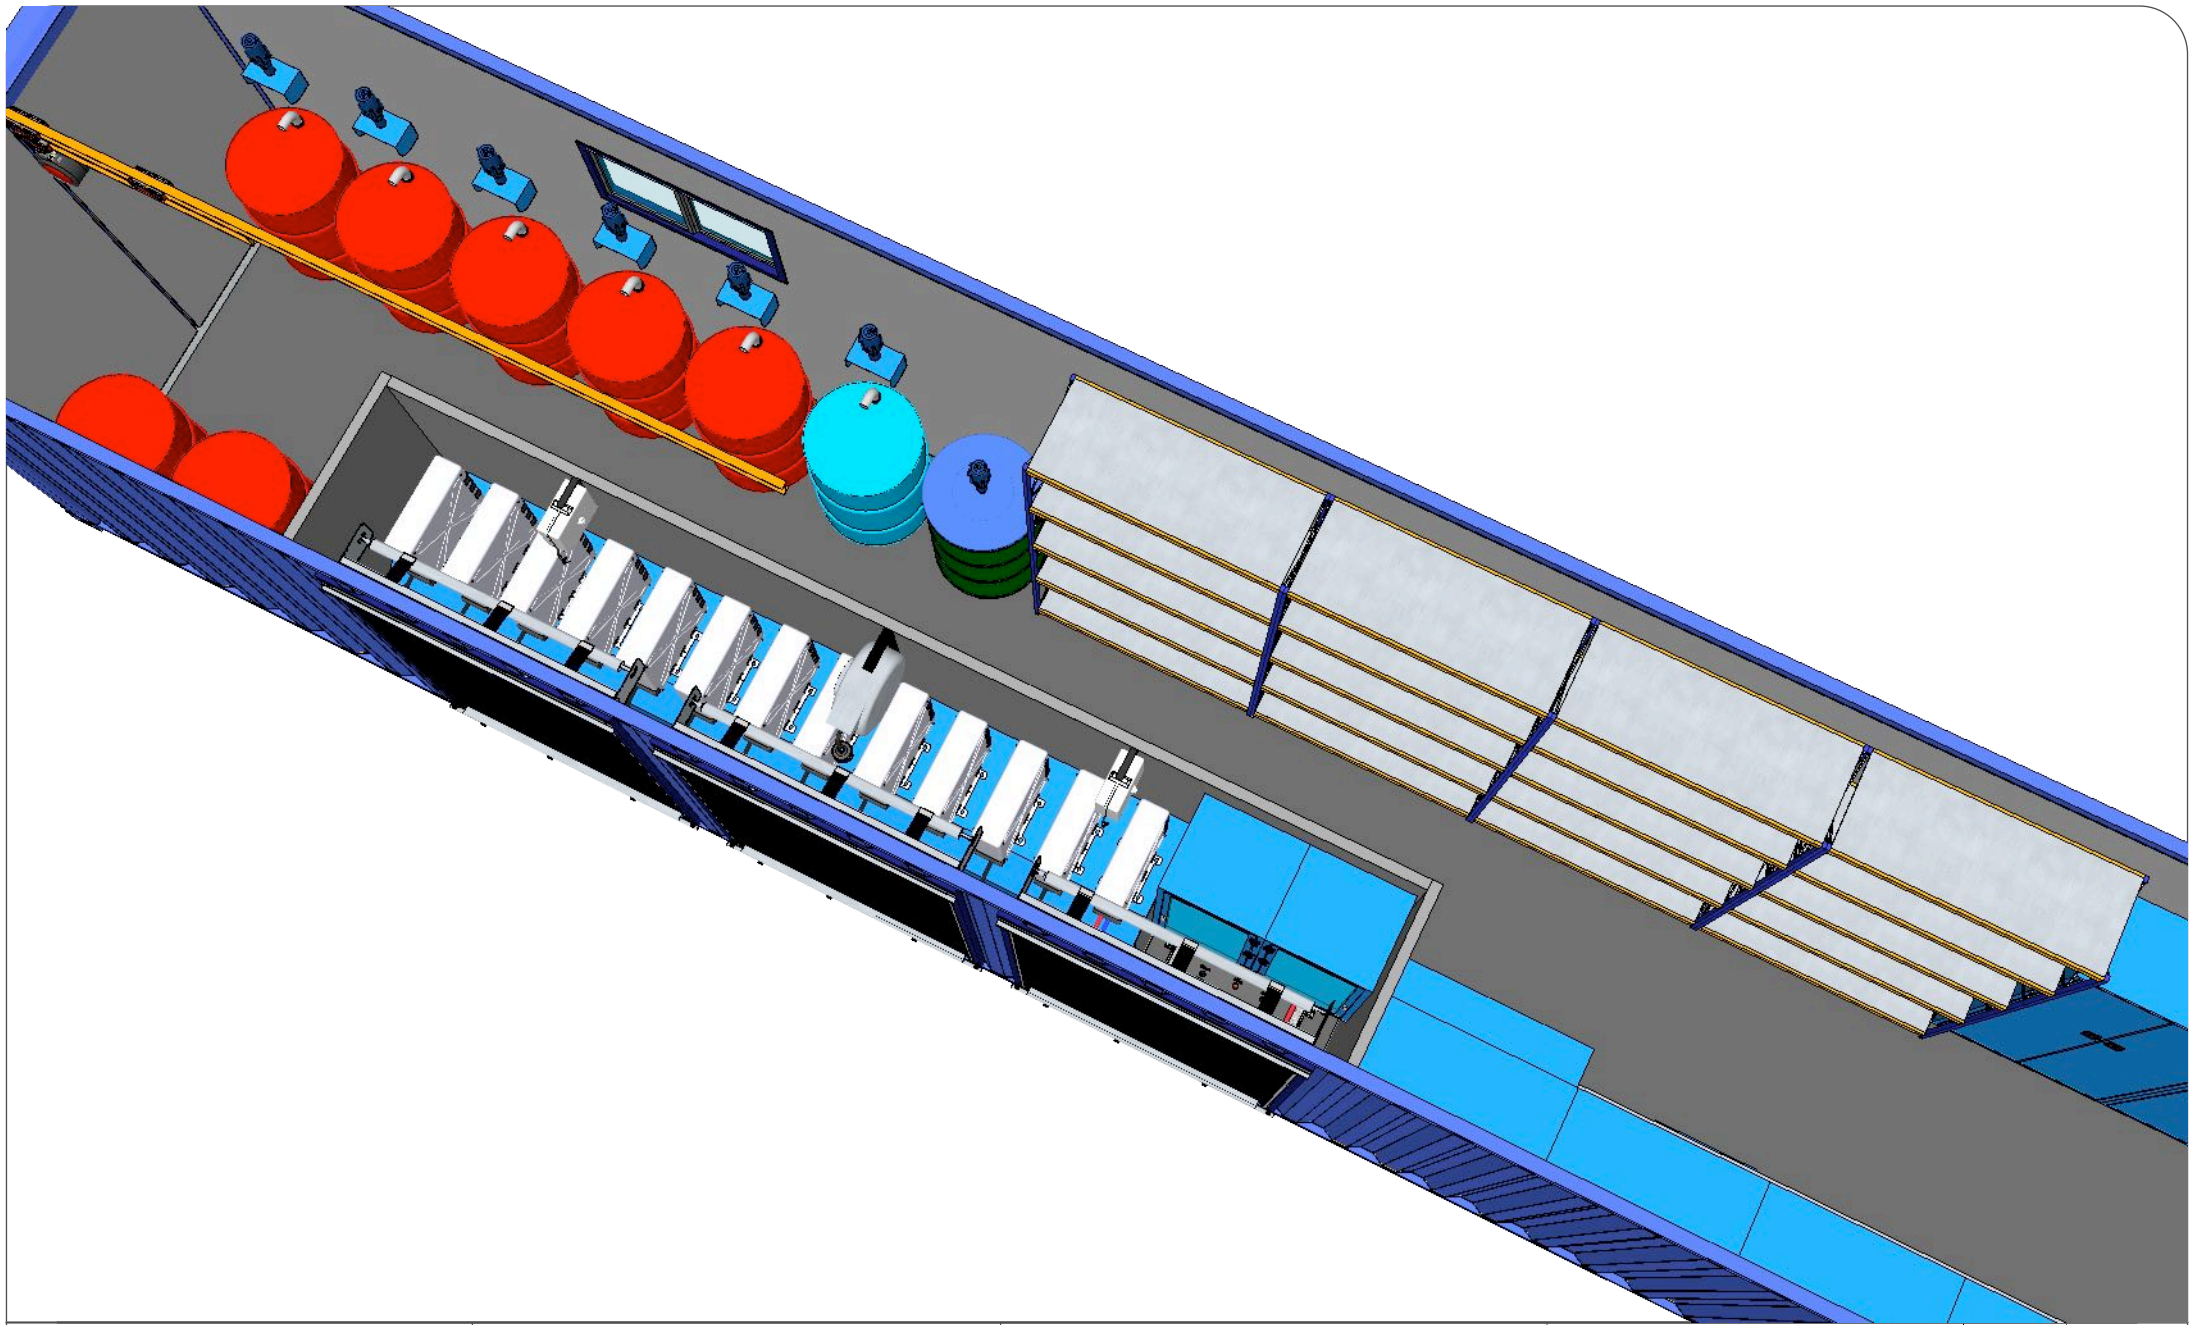




Project / Model
21.026
40' Lubrication Service Container





Explanation
 ...





Info
 Date : 07.08.2021
 Rev. : 03 / 30.08.2021
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com







A 13




Equipment	Explanation	Brand / Orjin	Quantity	
	Bodywork 40' HQ / ISO Container External Dimensions Length: 12.192 mm Width: 2.432 mm Height: 2.896 mm Internal Dimensions Length: 12.024 mm Width: 2.350 mm Height: 2.697 mm Area : 76.2 m3 Tare: 4.020 kg. Insulation: Polyurethane 30 mm Inner coating: Alukobond 4 mm Floor: Polywood 18 mm Floor Covering: PVC 2,5 mm	ALURA / Turkey	1	pcs
	Aluminum Shutters Manuel Working Locking Systems Size : 1800 x 2000 mm	CELIKSAN / Turkey	3	pcs
	Work Bench Width: 2.250 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg. Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Telescopic rails with 100% opening in drawers Central locking system in drawers Electrostatic powder paint Suspension boards modular Standard 2 220V sockets in electrically connected workbenches	ALURA / Turkey	2	pcs
	Industrial Cabinet Drawers: 8 Height Adjustable Shelves: 3 Width : 1010 mm Depth : 615 mm Height : 2.000 mm These are leaf door, heavy load cabinets. They are welded, stabşe 1.20 mm sheet constructions. Electrostatic powder coated. There are round edged, embedded stripe channel, eloxal aluminium lugs and there are plastic taps on the lug heads.	ALURA / Turkey	1	pcs
	Workbench Wheeled Drawer Width: 600 mm Depth: 465 mm Height: 950 mm Number of Drawers: 6 Pieces Drawer Transport Cap. : 60 kg.	ALURA / Turkey	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	<p>Metal Cabinet Width: 1.000 mm Depth: 450 mm Height: 2000 mm Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg. Variable drawer groups Body and carriers 0.80 - 1.2 mm sheet metal It is long-lasting and durable. The covers are double wing reinforced.</p>	ALURA / Turkey	1	pcs
	<p>Metal Cabinet Metal Locker 1 Person Width : 800 mm Depth : 400 mm Height : 2.100 mm These are leaf door. They are welded, stabşe 1.20 mm sheet constructions. Electrostatic powder coated. There are round edged, embedded stripe channel, eloxal aluminium Lugs and there are plastic taps on the lug heads.</p>	ALURA / Turkey	1	pcs
	<p>Material Rack</p>	CEMSAN / Turkey	4	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	<p>Lubrication Oil Set Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 3: 1 Compatible fluids: Oils Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg "</p>			
	<p>Drum Hose Reels Pressure: 150 bar Compatible fluids: Oils and Similar Swivel joint: Zinc Plated Steel Seals: Polyurethane Material: Painted Steel Couplings: Zinc Plated Steel Inlet: G 1/2 "f Outlet: G 1/2 "m Reel flow path: Internal drum width: 110 m "</p>	RAASM / Italy	8	pcs
	<p>Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 degrees to +100 degrees Size: 1/2 " Pressure: 160 bar Length: 15 mt "</p>			
	<p>Guns for dispensing Flu: Technopolymer Terminal: Flexible Drip-catcher: Semiautomatic ø 16 mm Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes "</p>			





Equipment	Explanation	Brand / Orjin	Quantity	
	<p>Coolant Set Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 3: 1 Compatible fluids: Antifreeze Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg</p>			
	<p>Drum Hose Reels Pressure: 150 bar Compatible fluids: Antifreeze Swivel joint: Zinc Plated Steel Seals: Polyurethane Material: Painted Steel Couplings: Zinc Plated Steel Inlet: G 1/2 "f Outlet: G 1/2 "m Reel flow path: 15 mt Internal drum width: 110 m</p>	RAASM / Italy	1	pcs
	<p>Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 degrees to +100 degrees Size: 1/2 " Pressure: 160 bar Length: 15 mt</p>			
	<p>Guns for dispensing Flu: Technopolymer Terminal: Flexible Drip-catcher: Semiautomatic ø 16 mm Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes</p>			



















Equipment	Explanation	Brand / Orjin	Quantity
	Lubrication Grease Set Grease dispenser kit for drums external Ratio: 50: 1 Flow rate: 1500 g / min For drums with internal: ø 370/420 Compatible fluids: Greases, medium / high viscosiyt Air inlet connection: G 1/4 f Fluid outlet connection: G 3/8 f Air working pressure: 6/8 bar Average air consumption: 330 l / min Noise level: 81 dB Suitable for drums: 16/20 kg Weight: 4.6 kg		
	Grease guns Terminal: flexible Inlet swivel joint: single G 1/4 "(f) Grease coupler: special 4-jaw	RAASM / Italy	1 pcs
	Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 degrees to +100 degrees Size: 3/8 " Pressure: 400 bar Length: 25 mt		
	Drum Hose Reels Pressure: 400 bar Compatible fluids: Antifreeze Swivel joint: Zinc Plated Steel Seals: Polyurethane Material: Painted Steel Couplings: Zinc Plated Steel Inlet: G 3/8 "f Outlet: G 3/8 "m Internal drum width: 110 m		
	Heater Radiator Cleaning Device Operation: Full Automatic Dimension: 94x50x60cm Weight: 45 kg Power: 2800 W Water Pump: 60 lt Heater: 1800 W Tank Capacity : 10 lt Radiator Cleaning Chemical : Organic Powder Manometer Gauge: 63 mm/ 4 Bar		
	Drum Hose Reels Pressure: 12 bar Compatible fluids: Antifreeze Swivel joint: Zinc Plated Steel Seals: Polyurethane Material: Painted Steel Couplings: Zinc Plated Steel Inlet: G 1/2 "f Outlet: G 1/2 "m Reel flow path: 10 mt	EG / Türkiye	1 set


Equipment	Explanation	Brand / Orjin	Quantity	
	<p>Waste Oil Systems Set Flow rate: 70 l / min Ratio: 1: 1 Max pressure: 8 bar. Max cycles for minute: 400 cpm. Max suction lift: wet column 7,5 Max working temperature: 100 ° C Noise level: 70 dB Air working pressure: 2/6 Bar Membranes: EPDM Balls: Acatel "</p> <p>Pressure: 150 bar. Compatible fluids: Oils Swivel joint: Zinc plated steel Seals: Polyurethane Characteristic: Fixed Material: Painted steel Inlet: G 1/2 "(f) Outlet: G 1/2 "(f) Reel flow path: Zinc plated steel Internal drum width: 110 mm "</p> <p>Waste oil gravity and suction drainers</p> <p>Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40C to +100 C Size: 1/2 " Pressure: 160 bar Length: 15 mt</p>	RAASM / Italy	1	pcs
	<p>Waste Oil Tank Metal Prisma Tank 2 mm / 500 Lt.</p>	ALURA / Turkey	1	pcs
	<p>Waste Oil Floor waste oil drainer 50 litre with quick release Connector line.</p>	RAASM / Italy	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
   	<p>Washing Machine Hot Set Hot Washing Machine Flow: 900 lt / hour Pressure: 200 Bar Water temperature: 30 - 140 C Engine Power: 7.5 hp Fuel Tank: 30 lt Fuel Con .: 4.8 kg / h Voltage - Phase: 380V-3 50 Hz Weight: 145 kg</p> <p>Whasing Gun</p> <p>Pressure: 200 bar. Compatible fluids: Water Swivel joint: Stainless Metal Seals: Polyurethane Characteristic: Fixed Material: Painted steel Inlet: G 3/8 " (f) Outlet: G 3/8 "(f) Reel flow path: Zinc plated steel Internal drum width: 110 mm</p> <p>Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 C / +100 C Size: 3/8 " Pressure: 160 bar Length: 25 mt.</p>	ROTTEST / Turkey	1	pcs
	<p>Air Reel Length hose: 11 m Length hose con. : 1.5 m Hose diameter: 8 x 12 mm Inlet connection thread: G 1/4" Max working pressure: 10 bar</p>	RAASM / Italy	1	pcs
	<p>Air Reel Set Professional Blow Gun</p>	AIGNEP	1	pcs
 	<p>Electric Reel 415 VAC 3 phase - 240 VAC 1 phase Auto Loopback Thermoplastic Cable 4 socket outlet 240 VAC 3 pcs 380 VAC 1 pcs</p>	ZECA / Italy	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	Hydraulic & Pneumatic Jack Folding Arm Mobile Jack Lifting Capacity: 40/25 tons Min. Height: 180 mm Mak. Height: 273 mm Lifting Distance: 40 / 85-25 / 80 mm Weight: 58 kg	GEMESA / Turkey	1	pcs
	Barrel carrier belt	ATLAS / Kore	1	pcs
	Chain Crane Capacity 500 Kg. Chain 3 mt.	ATLAS / Kore	1	pcs
	Clamp Size : 100 mm Jaw Width : 100 mm Total Lenght : 300 mm Arvil Size : 40x60 mm Vice Heaighy : 110 mm	GAMA / Turkey	1	pcs
	Clamp Size : 150 mm Jaw Width : 150 mm Total Lenght : 420 mm Arvil Size : 70x100 mm Vice Heaighy : 170 mm	GAMA / Turkey	1	pcs
	Auto Creeper 91cm long, heavy duty plastic sled Six non-destructive, oil resistant, wide wheels for easy maneuverability Oil-resistant padded headrest for comfortable handling Integrated toolboxes on both sides of the blade for easy access 910x430x110mm	TROY / Italy	1	pcs
	Lighting Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Consumption Power: 28 W / 38 W / 55 W Input Voltage: 220-240V AC 50/60 Hz CRI: >80 IP Value: IP65 Usage: Surface Mounted	EAE / Turkey	8	pcs
	Control panel of all equipment. Generator / Mains power connection.	ALURA / Turkey	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	Fire extinguisher Capacity: 6 kg. Full Weight: 9.1 kg. Working Pressure: 18 bar. Discharge Time: 14 sec. Extinguishing Agent: MAP@ (ABC)	ALURA / Turkey	4	pcs
	Pressure Regulator Air Inlet: 1/2 inch Filter : 20U Working Pressure : 05-9.9 Atu Working temperature : 5-60 ° C Water Capacity : 80 MI Air Permeability : 2200Lt / Dk	OSAKA / Japan	1	pcs
	Compressed air line installation. Polyurethane Pneumatic fittings	ALURA / Turkey	1	set
	Compressed air line installation. Polyurethane Pneumatic hose 10 mm.	ALURA / Turkey	1	set

Equipment	Explanation	Brand / Orjin	Quantity	
	304 Piece Tool Set			
	Combination Wrench Set 1			
	Combination Wrench Set 1			
	Double Open End Wrench Set 1			
	Double Ring End Wrench Set 1			
	1/4" Drive Socket and Hex Key Set 1			
	1/2" Drive Socket Set (C21-12 Ratchet) 1			
	Drive Deep Socket Set 1			
	Drive TORX/Hex/XZN Socket Bits Set 1			
	C-PLUS Slotted/PH Screwdriver and Bit Set 1			
	C-PLUS TORX Screwdriver Set 1		1	pcs
	T-Handle and Ballpoint L Hex Key Set 1			
	DuoTech Pliers Set (Polished Finish) 1			
	Pliers and Adjustable Wrench Set 1			
	Circlip Pliers Set 1			
	Precision Pliers and Screwdriver Set 1			
	Measuring and Cutting Tool Set 1			
	Standard and Needle File Set 1			
	Hammer and Chisel Set 1			
	Drill Bit and Impact Screwdriver Set 1			
	Hand Riveter Set			

Equipment	Explanation	Brand / Orjin	Quantity
	Mechanic Tool Bag 5 M Chrome Tape Meter : 1 Pc. Short Bits Holder 6,3X30 : 1 Pc. Bits Set Of 10 25 Mm: 1 Pc. Led Flashlight: 1 Pc. Rod Star Screw Screw 4,5X80-6X100 : 2 Pcs. Rod Flat Screw Driver 3X80-4X100-5X125-6X150 : 4 Pcs. 135 Control Item: 1 Pc. 240 Universal Fort Pliers: 1 Pc. 1/2" Socket Wrench 10-11-12-13-14-15-17-19-22-24-27-30-32 Mm 13 Pcs. 1/2" Long Arm 250 Mm : 1 Pc. 1/2" Masfal 70 Mm : 1 Pc. 1/2" Latch Handle 32 Teeth 250Mm : 1 Pc. 12 Piece Allen Set: 1 Pc. Short Combined Wrench 8-9-10-11-12-13-14-17-19-22 Mm : 10 Pcs. 160 Mm Opaque Side Cut: 1 Pc. 180 Mm Opaque Combined Pliers: 1 Pc. 160 Mm Opaque Long Flat Sharp Shaft : 1 Pc.	İZELTAŞ / Turkey	1 pcs