

Project / Model
21.036
20' Lubrication Container





Explanation

...

Info

Date : 05.09.2021
Rev. : 00
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A 01

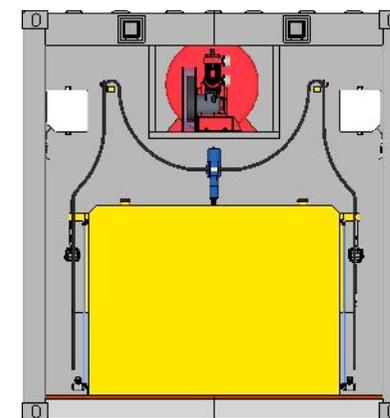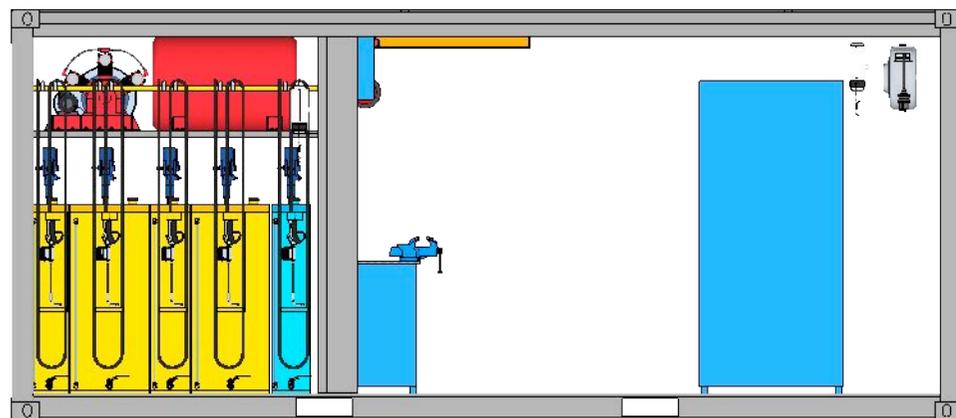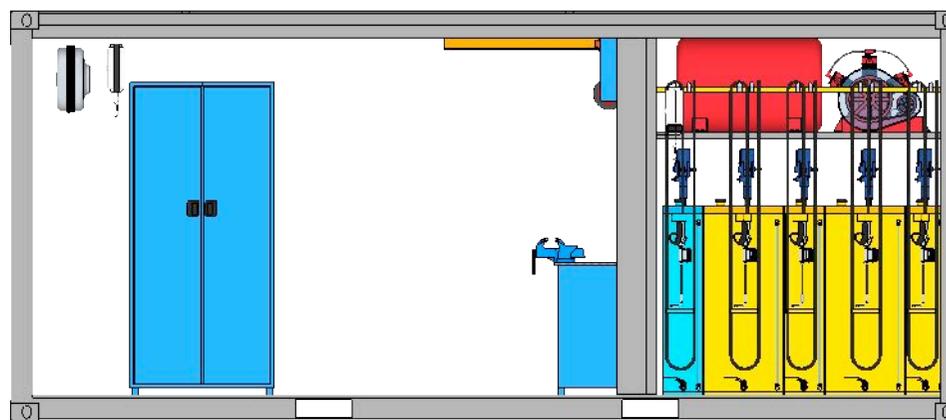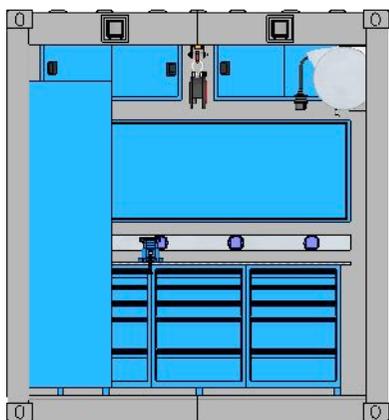

Project / Model

21.036

20' Lubrication Container


Explanation

...

Info

Date : 05.09.2021
 Rev. : 00
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 02

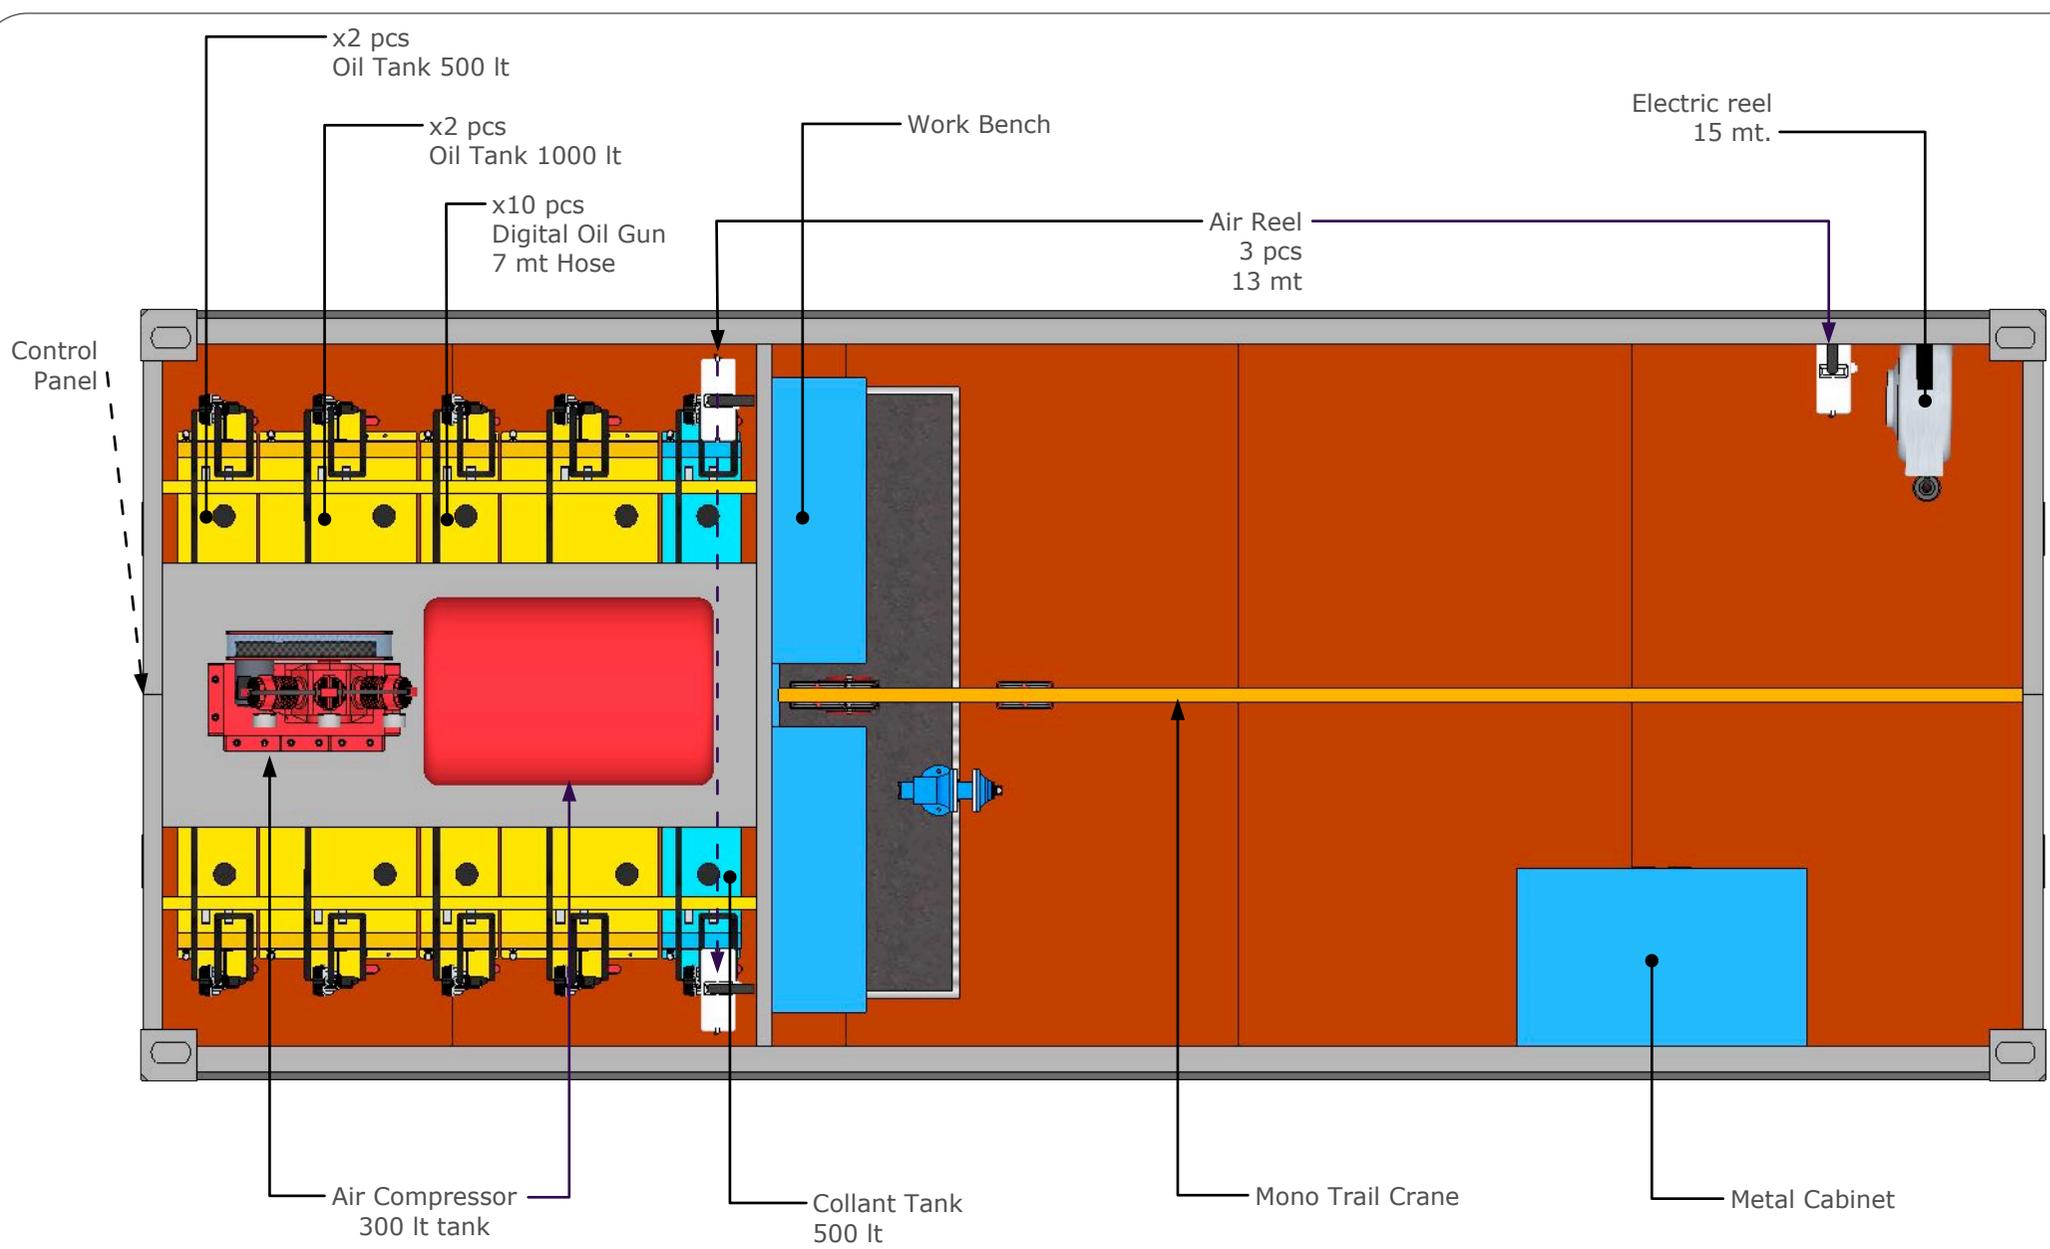


Project / Model
21.036
20' Lubrication Container

Explanation
 ...

Info
 Date : 05.09.2021
 Rev. : 00
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 03

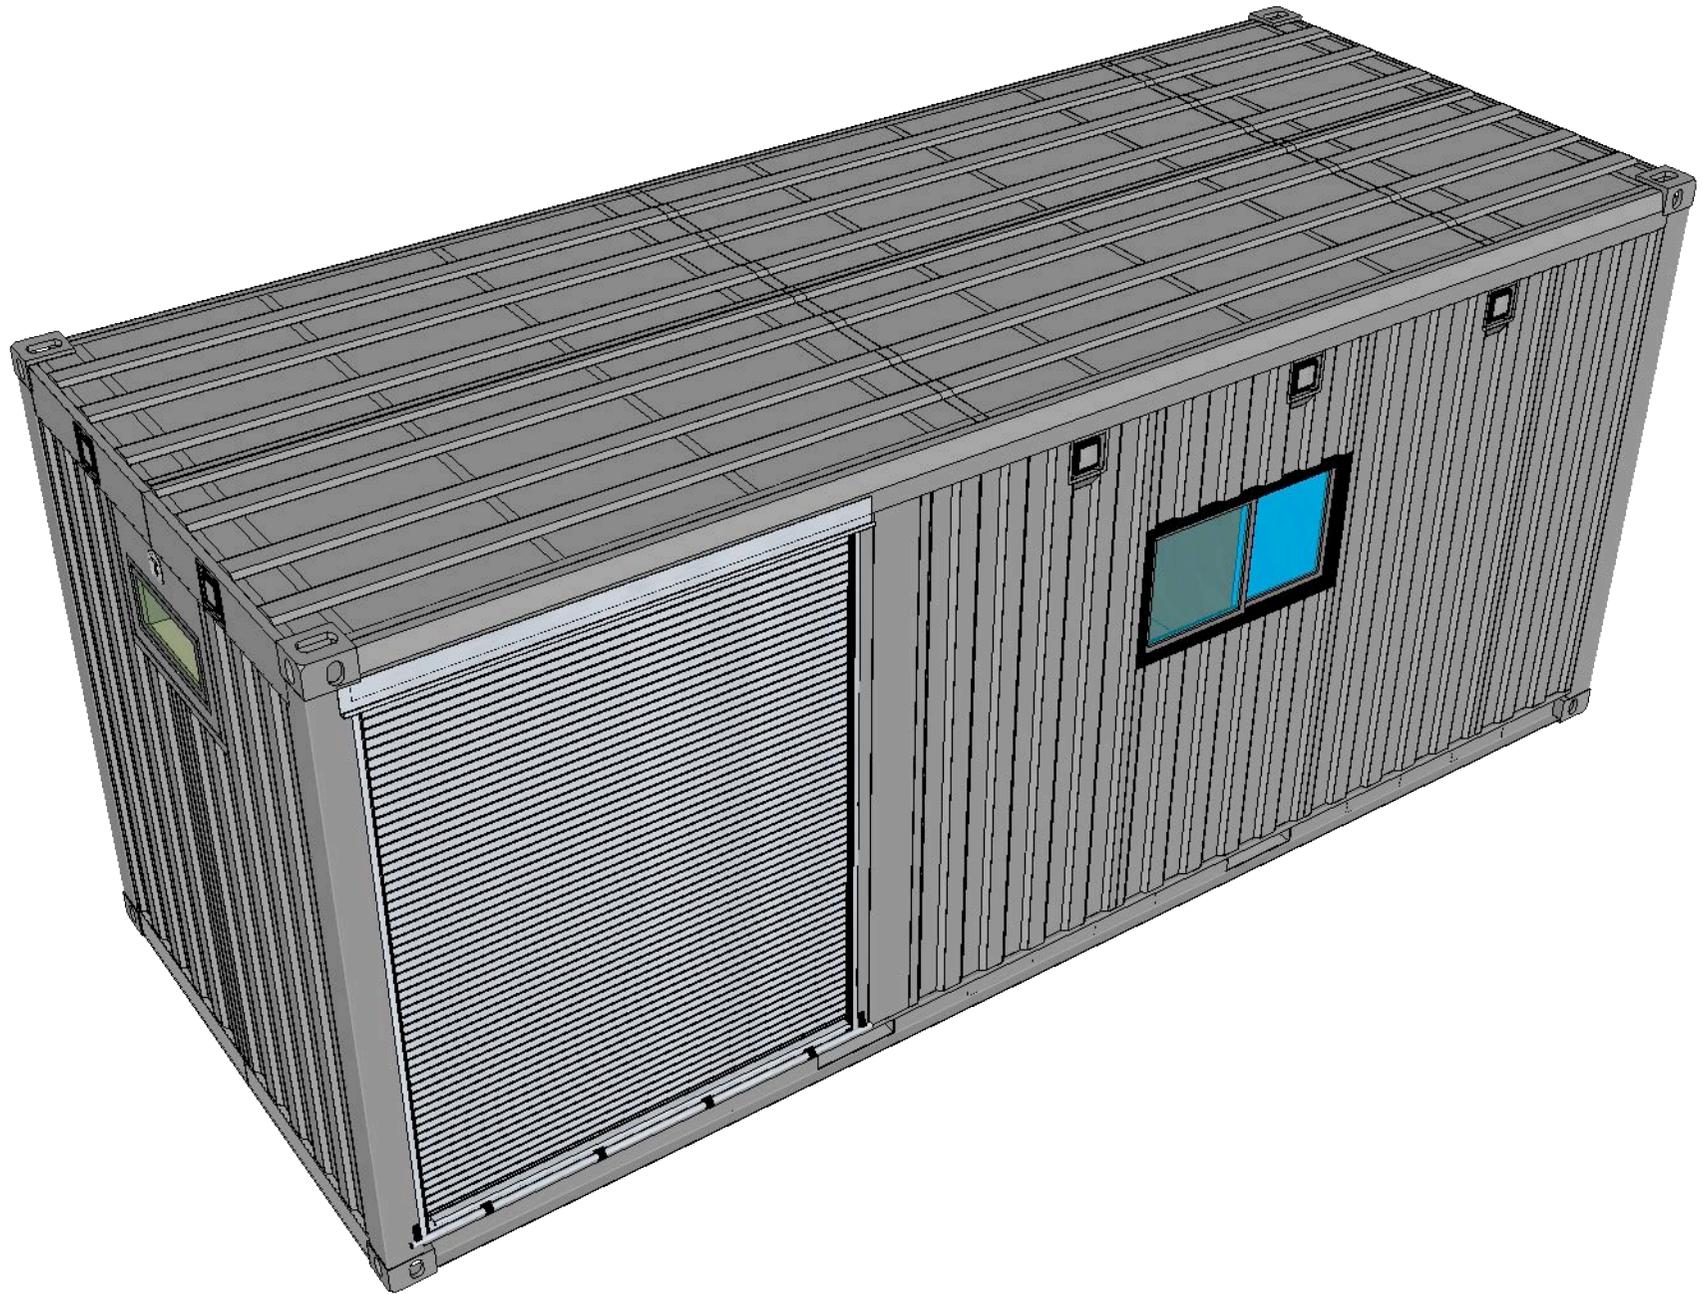

Project / Model

21.036
20' Lubrication Container


Explanation

...

Info

Date : 05.09.2021
Rev. : 00
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A 04

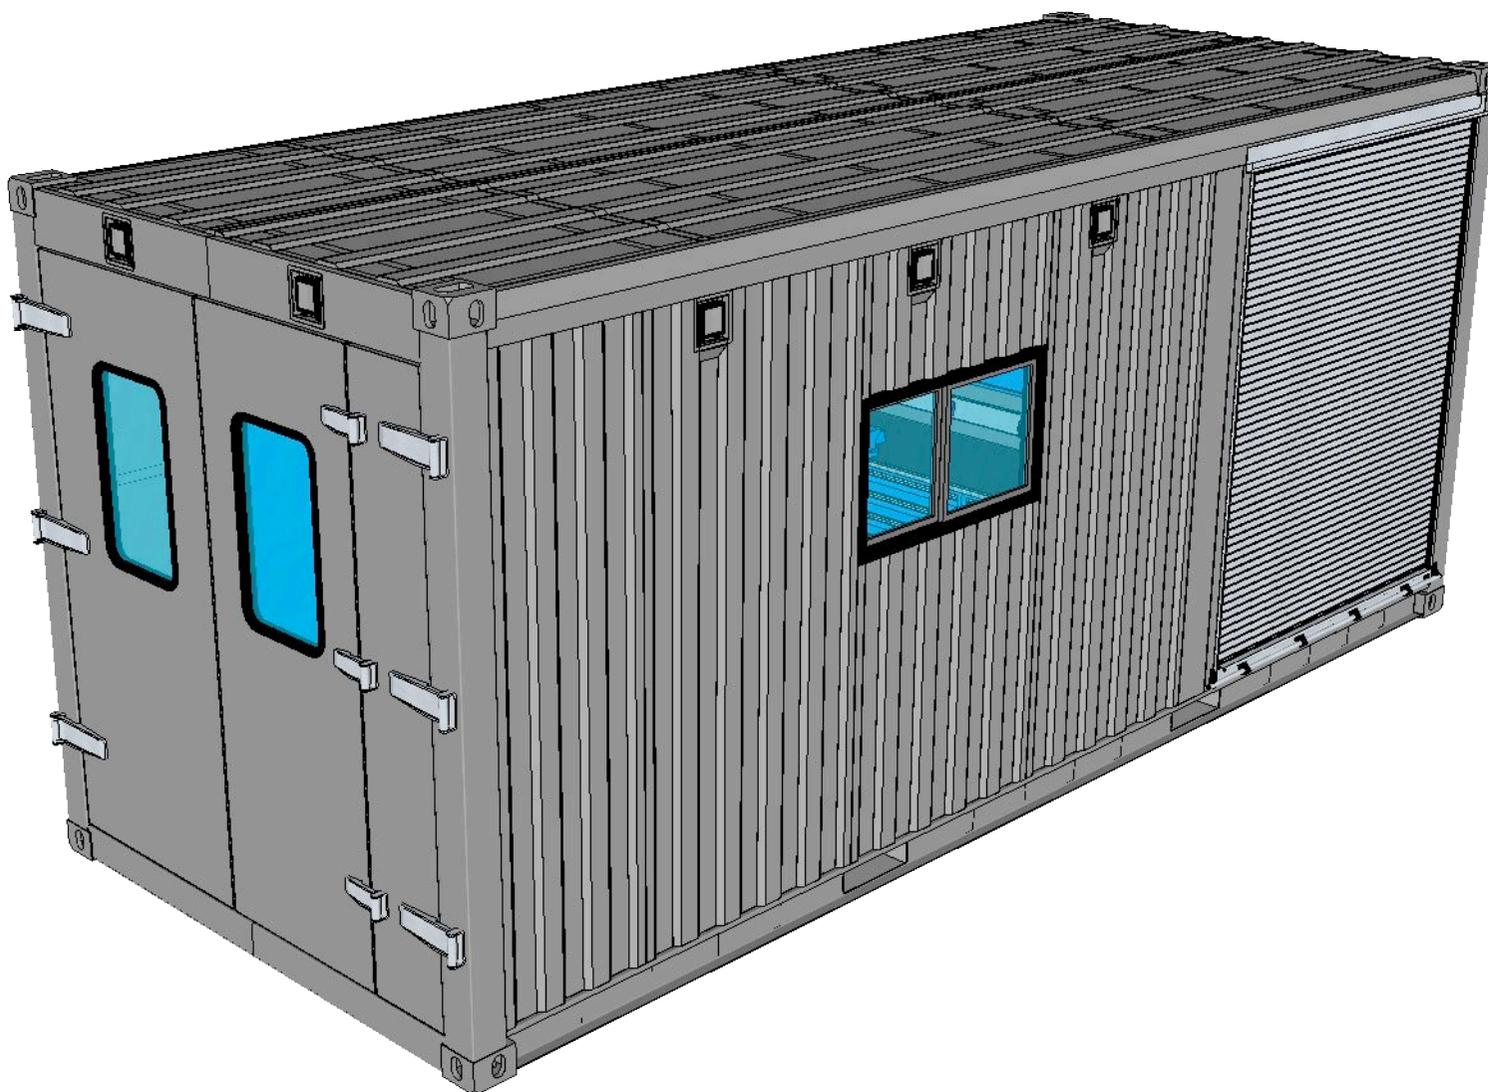

Project / Model

21.036

20' Lubrication Container

Explanation

...

Info

Date : 05.09.2021

Rev. : 00


Per. : Metin ALCAR

Tel : 0544 242 04 91

Mail : sales@aluratrailer.com

A

05

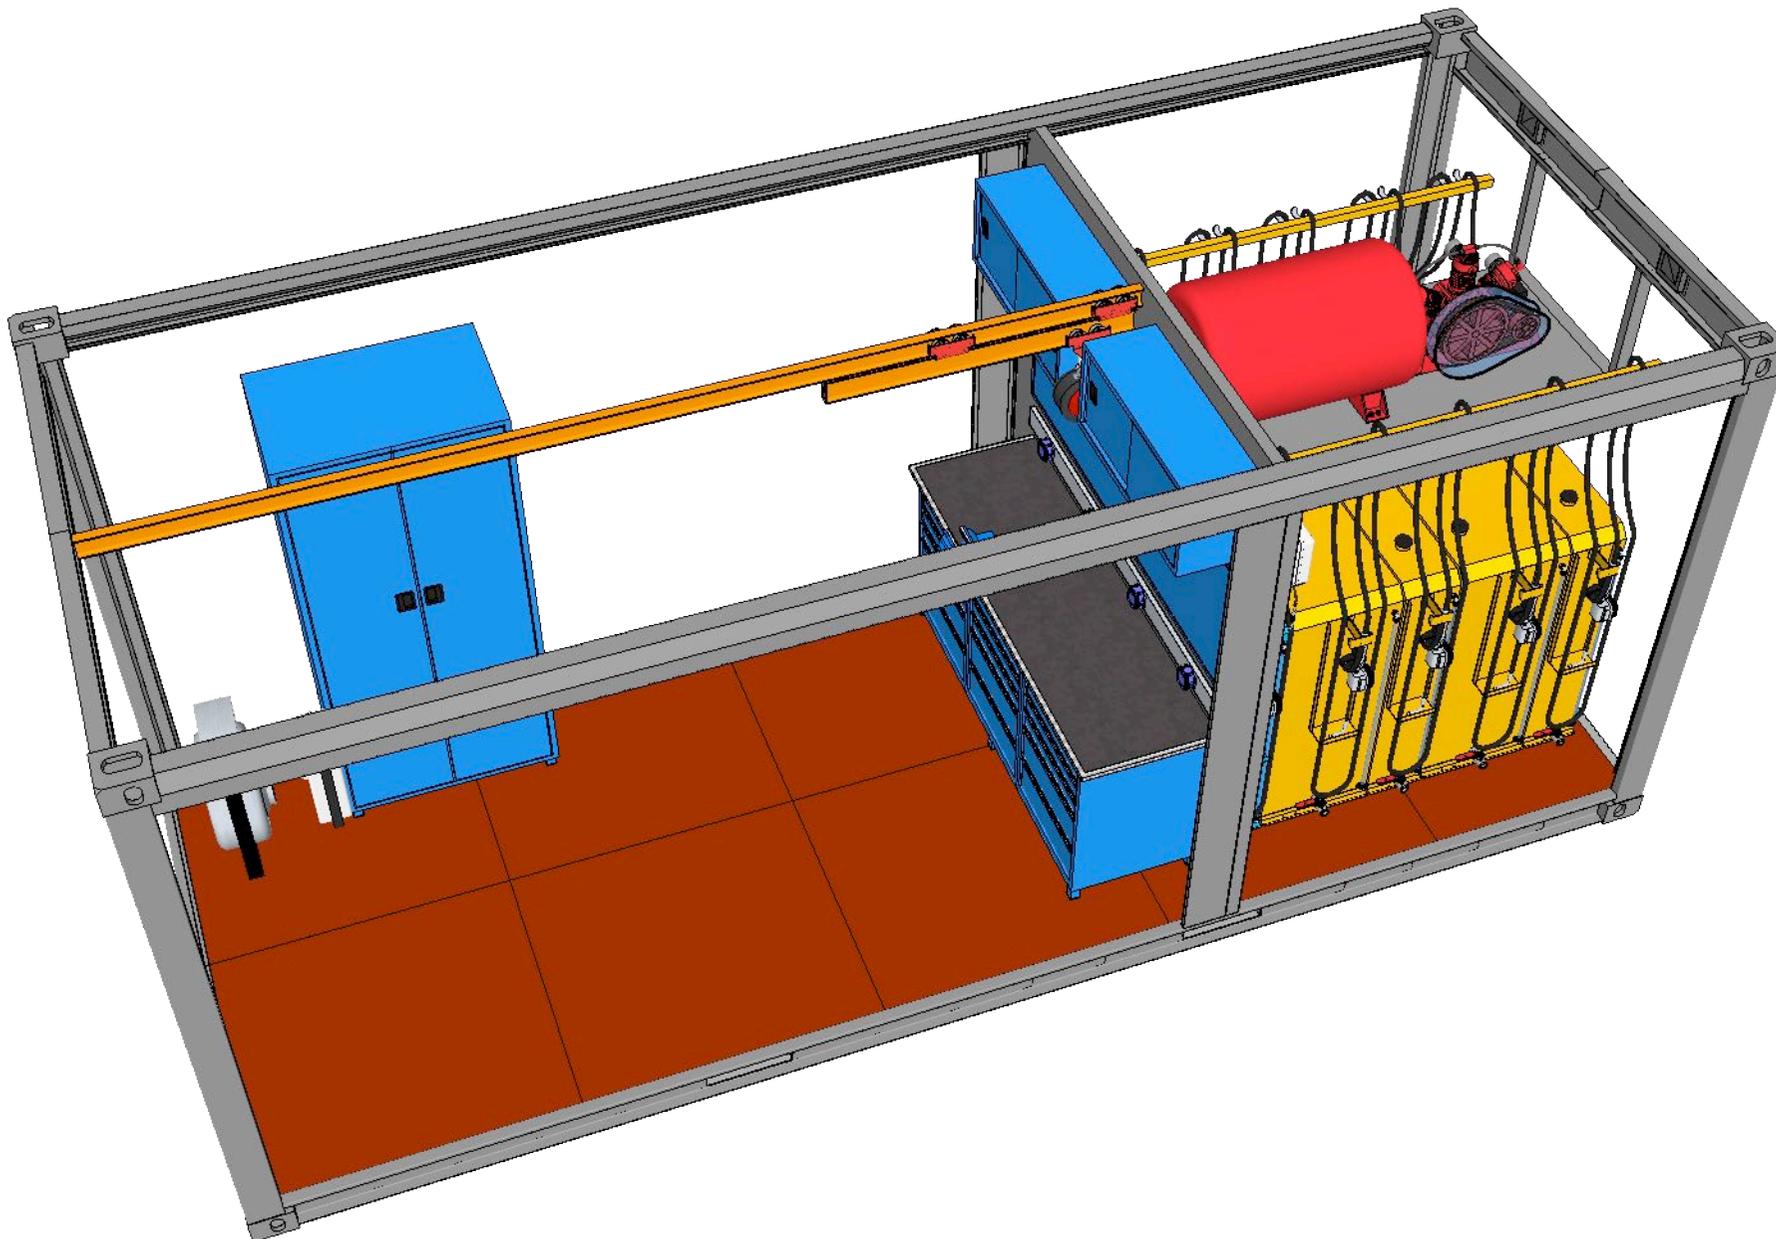

Project / Model

21.036

20' Lubrication Container

Explanation


...

Info

Date : 05.09.2021
Rev. : 00
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A

06

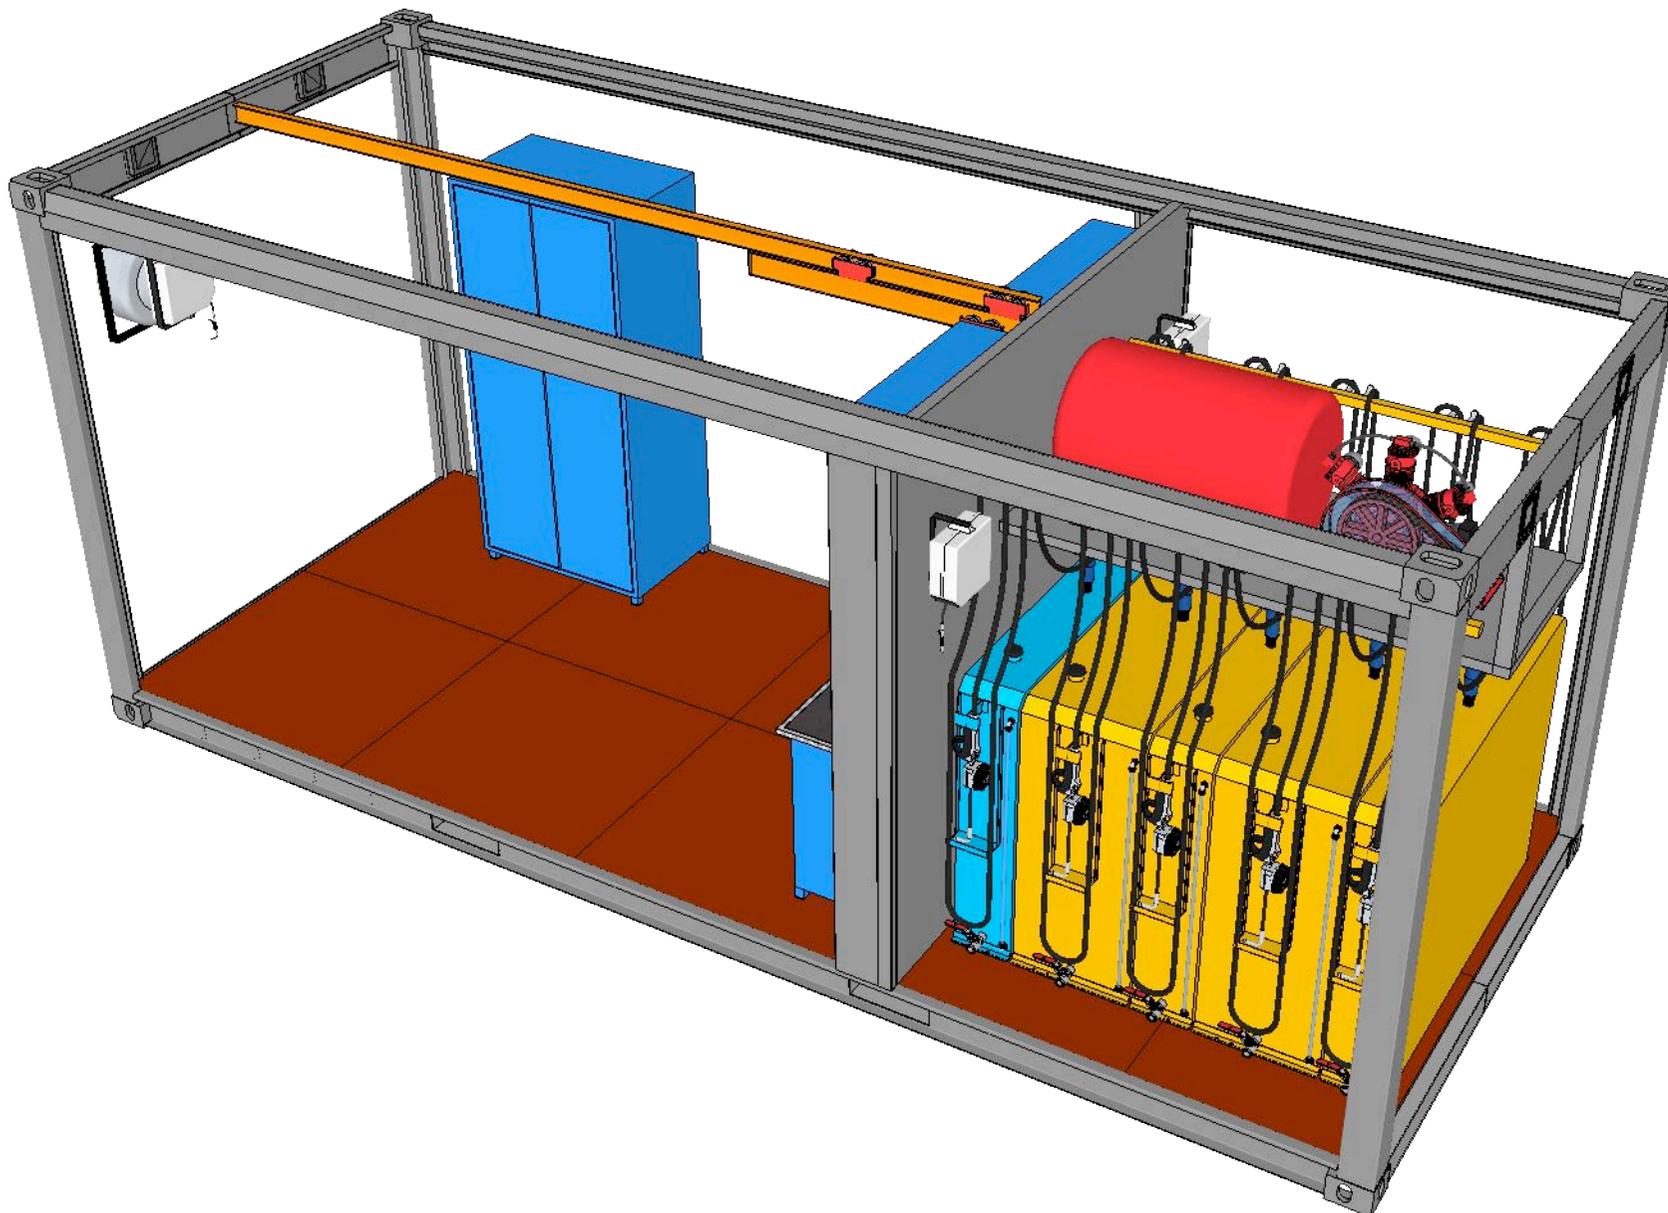


Project / Model
21.036
20' Lubrication Container

Explanation
...

Info
Date : 05.09.2021
Rev. : 00
Per. : Metin ALCAR
Tel : 0544 242 04 91
Mail : sales@aluratrailer.com

A 07

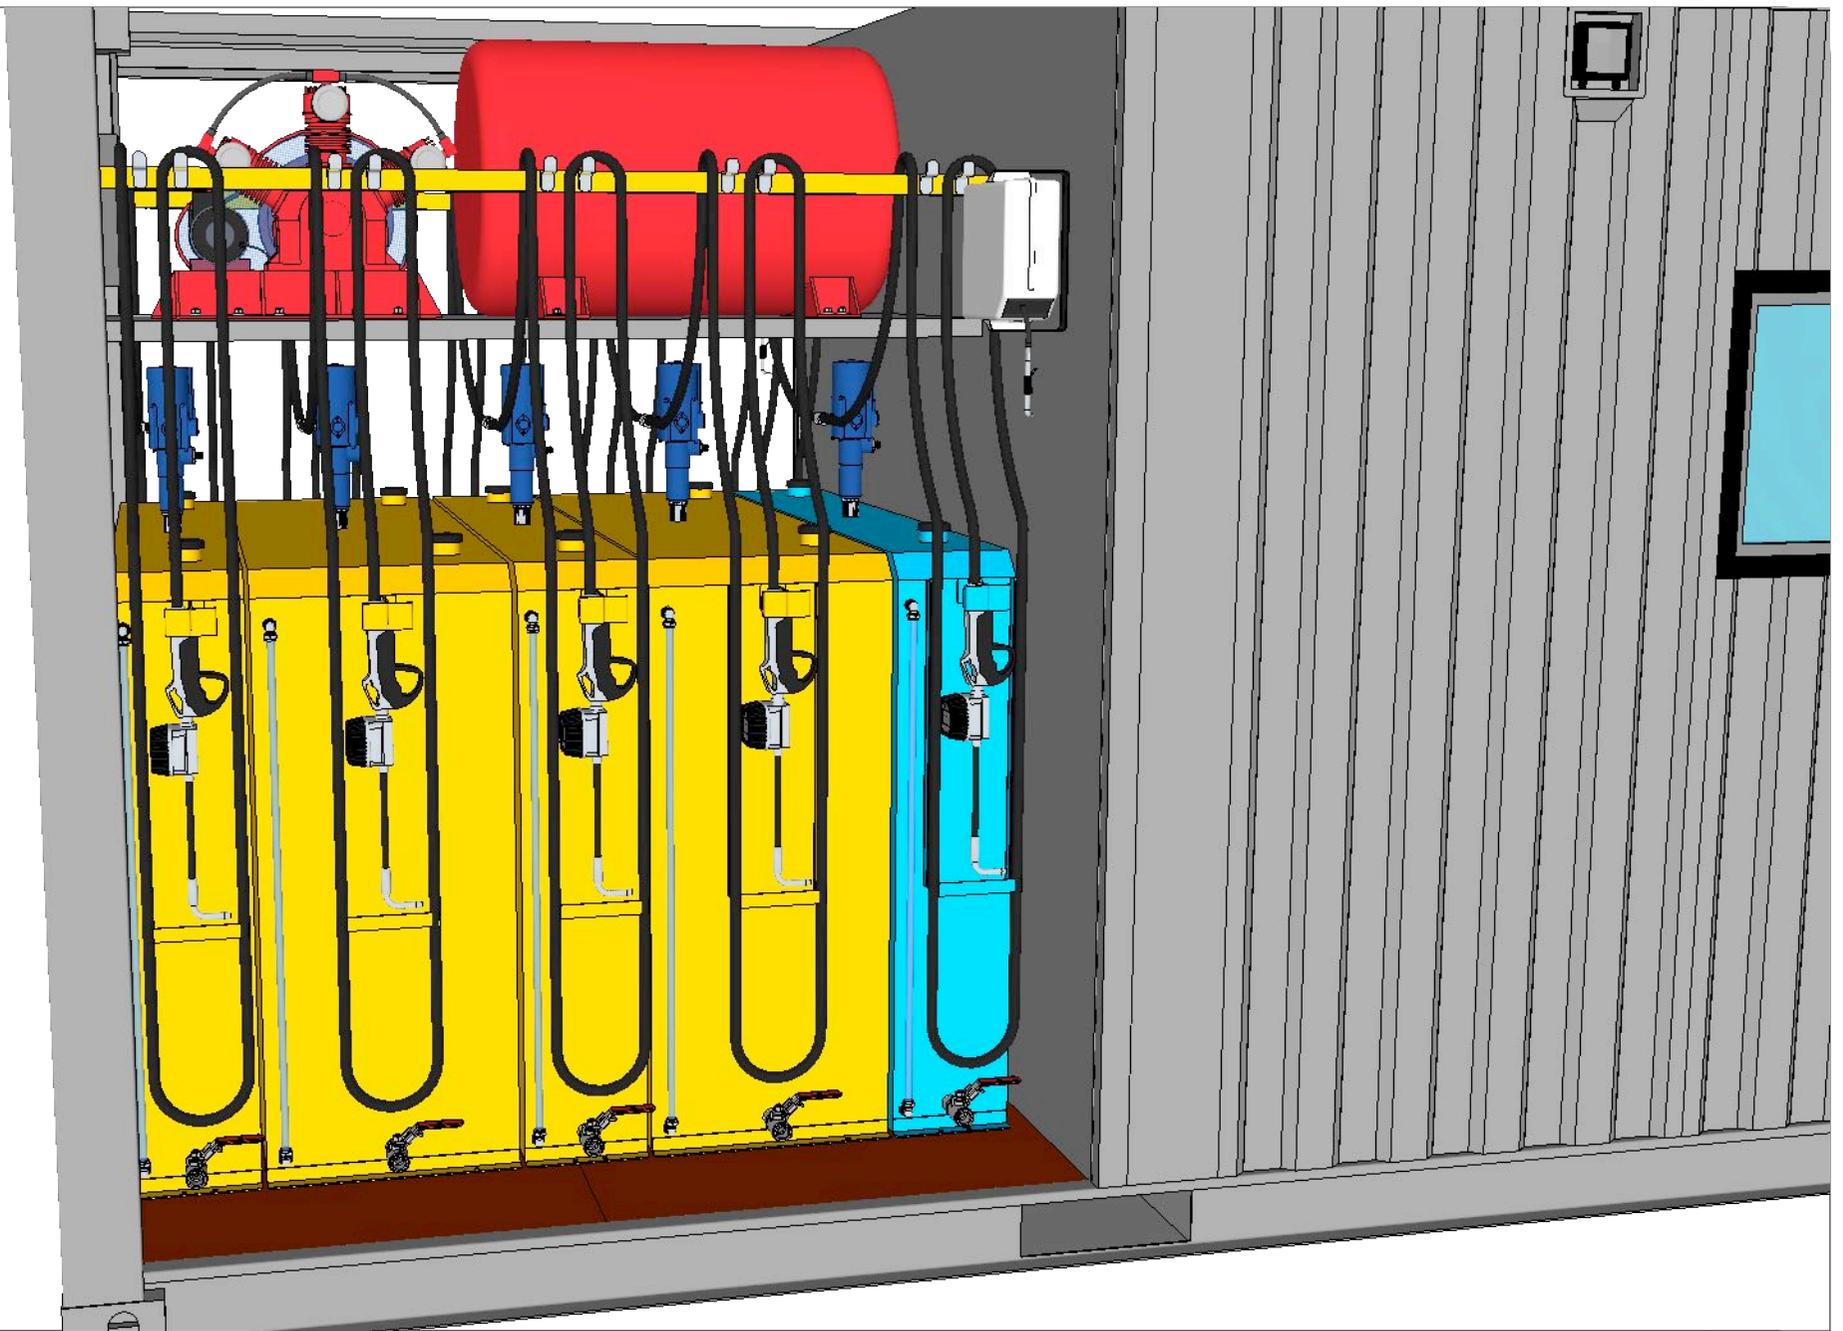


Project / Model
21.036
20' Lubrication Container

Explanation
 ...

Info
 Date : 05.09.2021
 Rev. : 00
 Per. : Metin ALCAR
 Tel : 0544 242 04 91
 Mail : sales@aluratrailer.com

A 08

| Equipment | Explanation | Brand / Orjin | Quantity | |
|---|--|-------------------|----------|-----|
|  | Bodywork 20' Dry / Standard Container External Dimensions Length: 6.058 mm Width: 2.432 mm Height: 2.591 mm Internal Dimensions Length: 5.895 mm Width: 2.350 mm Height: 2.392 mm Area : 33.2 m3 / 14 m2 Tare: 2.250 kg. Insulation: Polyurethane 30 mm Inner coating: Alukobond 4 mm Floor: Polywood 18 mm Floor Covering: PVC 2,5 mm | ALURA / Turkey | 1 | pcs |
|  | Aluminum Shutters Manuel Working Locking Systems Size : 1800 x 2000 mm | CELIKSAN / Turkey | 2 | pcs |
|  | Work Bench Width: 1.800 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg. Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Telescopic rails with 100% opening in drawers Central locking system in drawers Electrostatic powder paint Suspension boards modular Standard 2 220V sockets in electrically connected workbenches | ALURA / Turkey | 1 | pcs |
|  | Industrial Cabinet Drawers: 8 Height Adjustable Shelves: 3 Width : 1010 mm Depth : 615 mm Height : 2.000 mm These are leaf door, heavy load cabinets. They are welded, stabçe 1.20 mm sheet constructions. Electrostatic powder coated. There are round edged, embedded stripe channel, eloxal aluminium lugs and there are plastic taps on the lug heads. | ALURA / Turkey | 1 | pcs |
|  | Pistone Compressor Electric Motor : 380 V Capacity: 630 Lt/min Pressure : 12 Bar Cylinder: 2 pcs Power: 7,5 Hp | AYKOM / Turkey | 1 | pcs |

| Equipment | Explanation | Brand / Orjin | Quantity | |
|---|---|----------------|----------|-----|
|  | 300 Lt Air Tank | AYKOM / Turkey | 1 | pcs |
|  | Lubrication Oil Set Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 3: 1 Compatible fluids: Oils Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg " | RAASM / Italy | 4 | |
|  | Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 degrees to +100 degrees Size: 1/2 " Pressure: 160 bar Length: 7 mt Guns for dispensing Flu: Technopolymer Terminal: Flexible Drip-catcher: Semiautomatic ø 16 mm Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes " | RAASM / Italy | 9 | |
|  | Coolant Set Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 3: 1 Compatible fluids: Antifreeze Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg | RAASM / Italy | 1 | |

| Equipment | Explanation | Brand / Orjin | Quantity | |
|---|---|----------------|----------|-----|
|  | <p>Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 degrees to +100 degrees Size: 1/2 " Pressure: 160 bar Length: 7 mt</p> <p>Guns for dispensing Flu: Technopolymer Terminal: Flexible Drip-catcher: Semiautomatic ø 16 mm Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes</p> | RAASM / Italy | 1 | |
|  | <p>Lubrication Oil Transfer Tank Set Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 1: 1 Compatible fluids: Oils Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg</p> <p>Pump Seat Plate: 3 Sets Pu Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 C to +100 C Size: 1/2 " Pressure: 160 bar Length: 6 mt</p> | RAASM / Italy | 1 | pcs |
|  | <p>Waste Oil Tank Inox Prisma Tank 2 mm / 500 Lt.</p> | ALURA / Turkey | 3 | pcs |
|  | <p>Waste Oil Tank Inox Prisma Tank 2 mm / 1000 Lt.</p> | ALURA / Turkey | 2 | |
|  | <p>Air Reel Length hose: 11 m Length hose con. : 1.5 m Hose diameter: 8 x 12 mm Inlet connection thread: G 1/4" Max working pressure: 10 bar</p> | RAASM / Italy | 3 | pcs |

| Equipment | Explanation | Brand / Orjin | Quantity | |
|---|---|----------------|----------|-----|
|  | <p>Air Reel Pressure: 20 bar. Compatible fluids: Air Swivel joint: Stainless Metal Seals: Polyurethane Characteristic: Fixed Material: Painted steel Inlet: G 1/2 " (f) Outlet: G 1/2 "(f) Reel flow path: Zinc plated steel Internal drum width: 110 mm</p> <p>Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 C / +100 C Size: 1/2 " Pressure: 10 bar Length: 25 mt.</p> | RAASM / Italy | 1 | pcs |
|  | <p>Electric Reel 415 VAC 3 phase - 240 VAC 1 phase Auto Loopback Thermoplastic Cable 4 socket outlet 240 VAC 3 pcs 380 VAC 1 pcs</p> | ZECA / Italy | 1 | pcs |
|  | <p>Mono Trail Crane Capacity 1000 Kg. Chain 5 mt.</p> | ATLAS / Kore | 1 | pcs |
|  | <p>Bench Vice Size : 100 mm Jaw Width : 100 mm Total Lenght : 300 mm Arvil Size : 40x60 mm Vice Heaighy : 110 mm</p> | GAMA / Turkey | 1 | pcs |
|  | <p>Lighting Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Consumption Power: 28 W / 38 W / 55 W Input Voltage: 220-240V AC 50/60 Hz CRI: >80 IP Value: IP65 Usage: Surface Mounted</p> | EAE / Turkey | 1 | pcs |
|  | <p>Outdoor Lighting 30 Watts: 5800 Lumens Size: 120x130 mm Working life: 30,000 hours Standard: IP67</p> | ALURA / Turkey | 10 | pcs |

| Equipment | Explanation | Brand / Orjin | Quantity | |
|--|---|----------------|----------|-----|
|  | Control panel of all equipment. Generator / Mains power connection. | ALURA / Turkey | 1 | pcs |
|  | Fire extinguisher Capacity: 6 kg. Full Weight: 9.1 kg. Working Pressure: 18 bar. Discharge Time: 14 sec. Extinguishing Agent: MAP@ (ABC) | ALURA / Turkey | 2 | pcs |
|  | Pressure Regulator Air Inlet: 1/2 inch Filter : 20U Working Pressure : 05-9.9 Atu Working temperature : 5-60 ° C Water Capacity : 80 MI Air Permeability : 2200Lt / Dk | OSAKA / Japan | 1 | pcs |
|  | Compressed air line installation. Polyurethane Pneumatic fittings | ALURA / Turkey | 1 | set |
|  | Compressed air line installation. Polyurethane Pneumatic hose 10 mm. | ALURA / Turkey | 1 | set |

Alura Trailer
www.aluratrailer.com
sales@aluratrailer.com
Export :+90 544 242 04 91



Date : 5.10.2021
Project : 21.007
Offer : 00-000
Revision : 0

| No | Equipment | Explanation | Quantity | Brand / Orjin |
|----|-----------|-------------|----------|---------------|
|----|-----------|-------------|----------|---------------|

||