
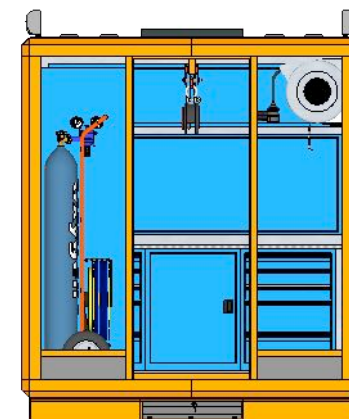
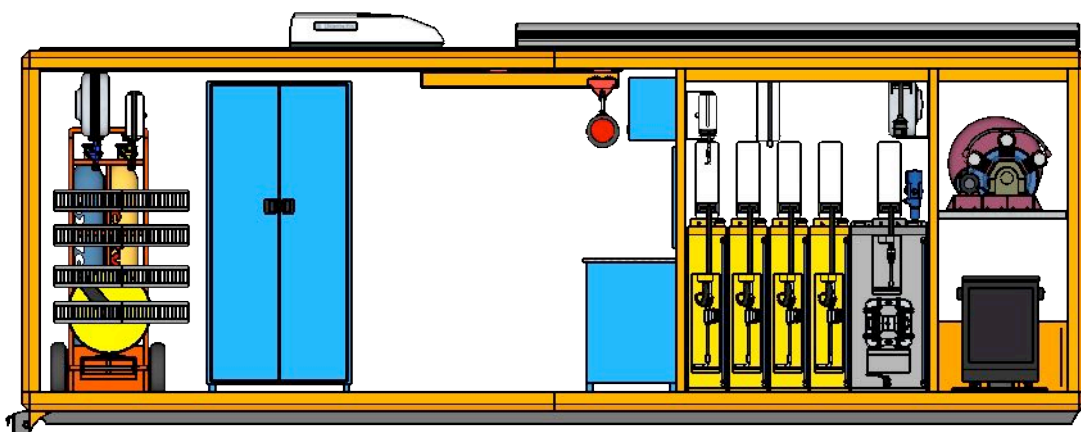
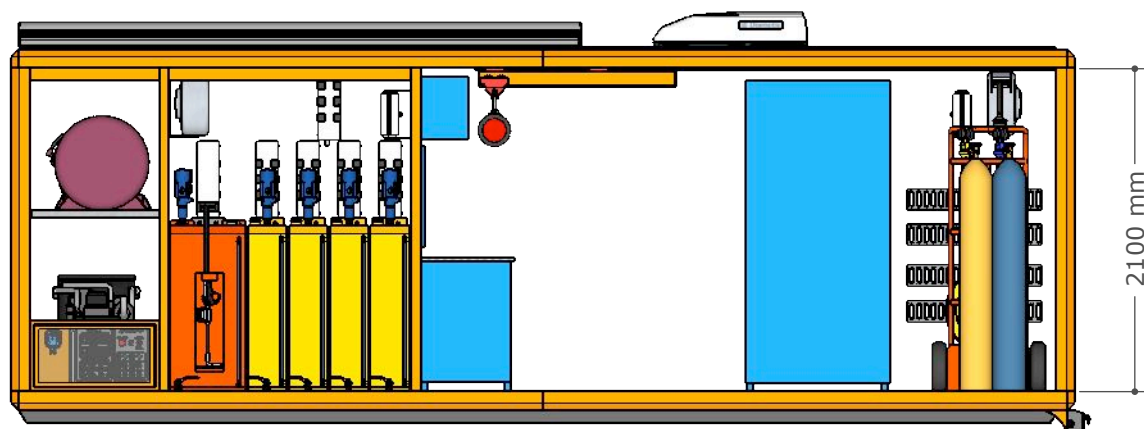


Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**

Explanation  
 ...

Info  
 Date : 04.10.2021  
 Rev. : 03  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 01**

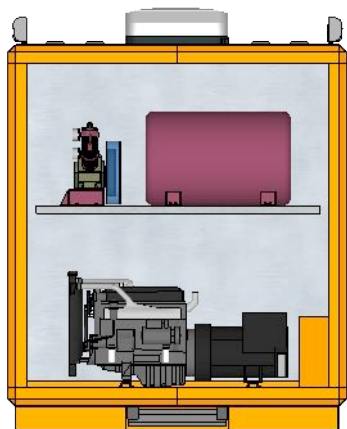

Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**


Explanation

...

Info

Date : 04.10.2021  
 Rev. : 03  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 02**

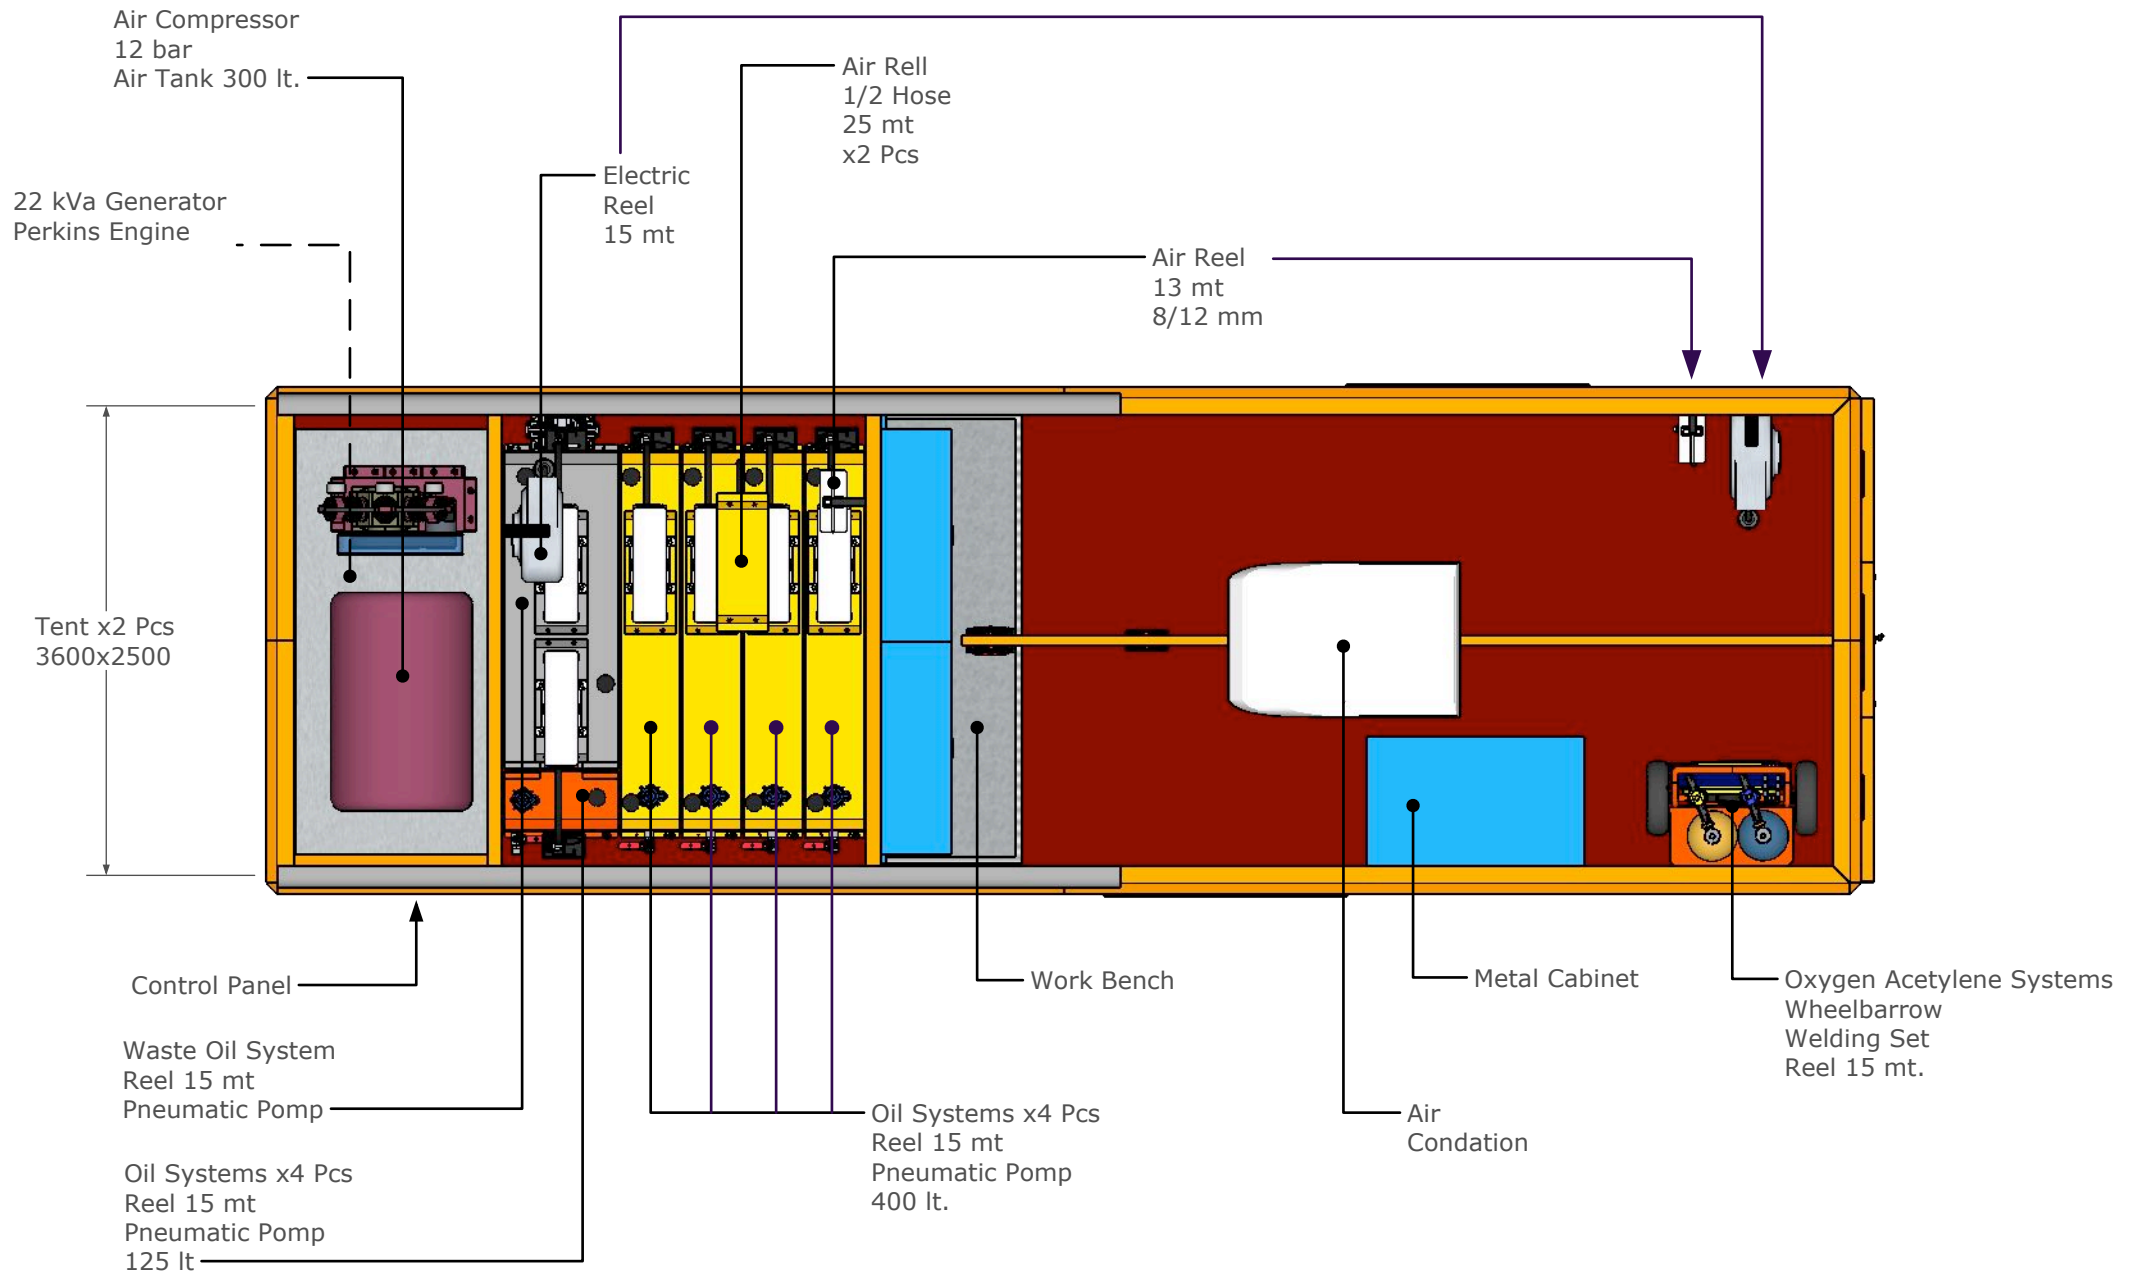

Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**

Explanation  
 ...

Info  
 Date : 04.10.2021  
 Rev. : 03  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 03**



Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**

Explanation  
...

Info  
Date : 04.10.2021  
Rev. : 03  
Per. : Metin ALCAR  
Tel : 0544 242 04 91  
Mail : sales@aluratrailer.com

**A 04**



Outdoor  
Lighting  
x12 pcs



Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**


Explanation

...

Info

Date : 04.10.2021  
 Rev. : 03  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 05**

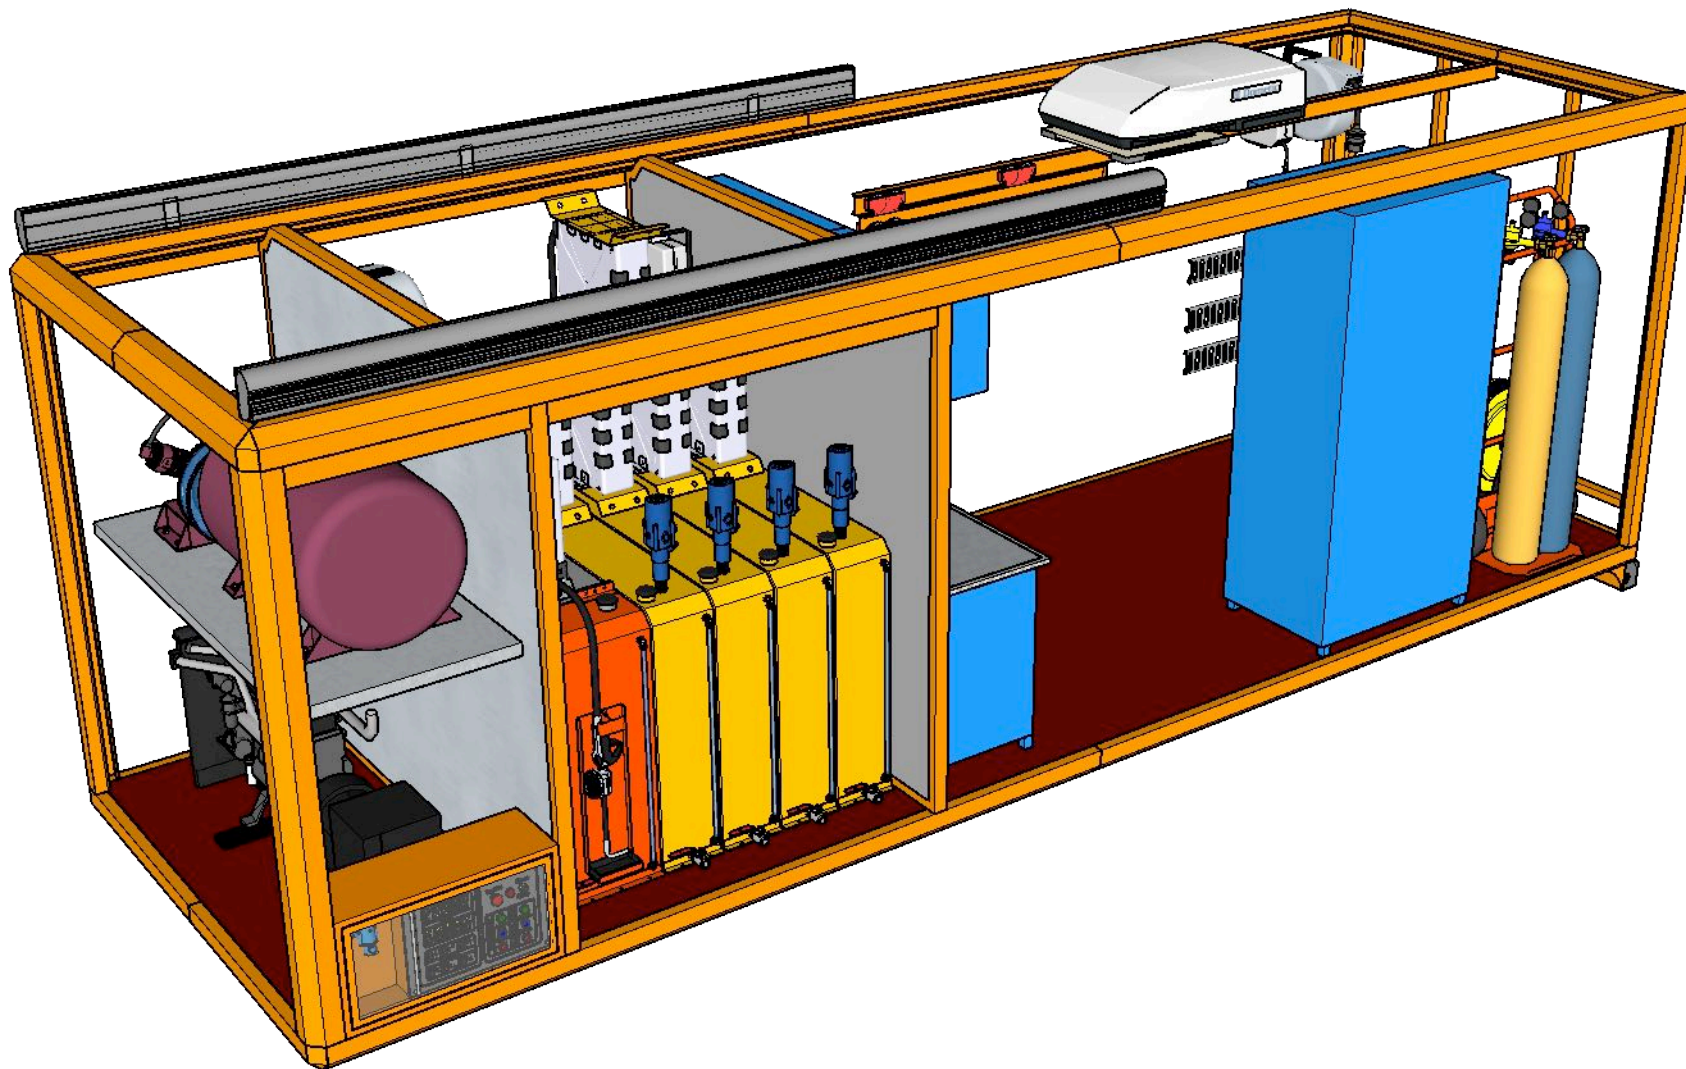


Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**

Explanation  
 ...

Info  
 Date : 04.10.2021  
 Rev. : 03  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A** **06**

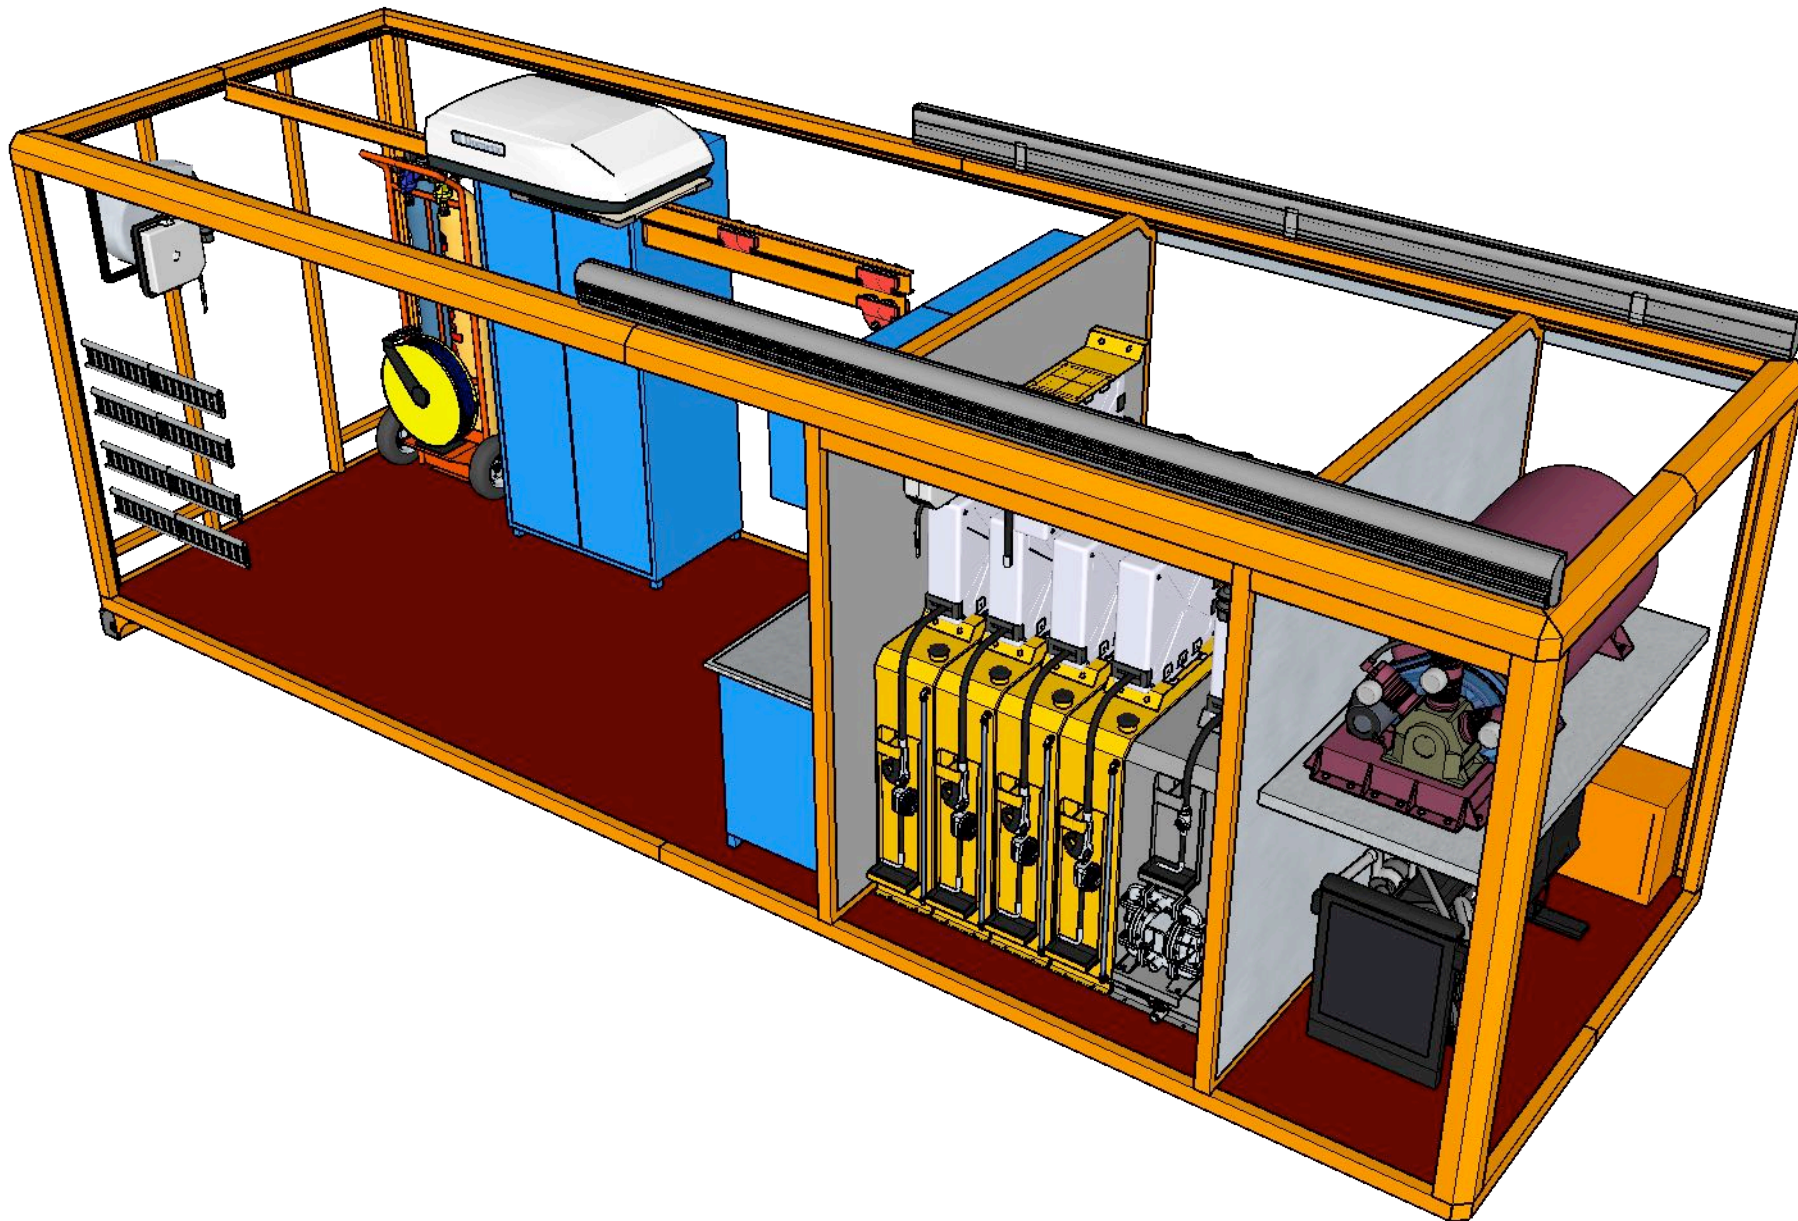


Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**

Explanation  
 ...

Info  
 Date : 04.10.2021  
 Rev. : 03  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 07**

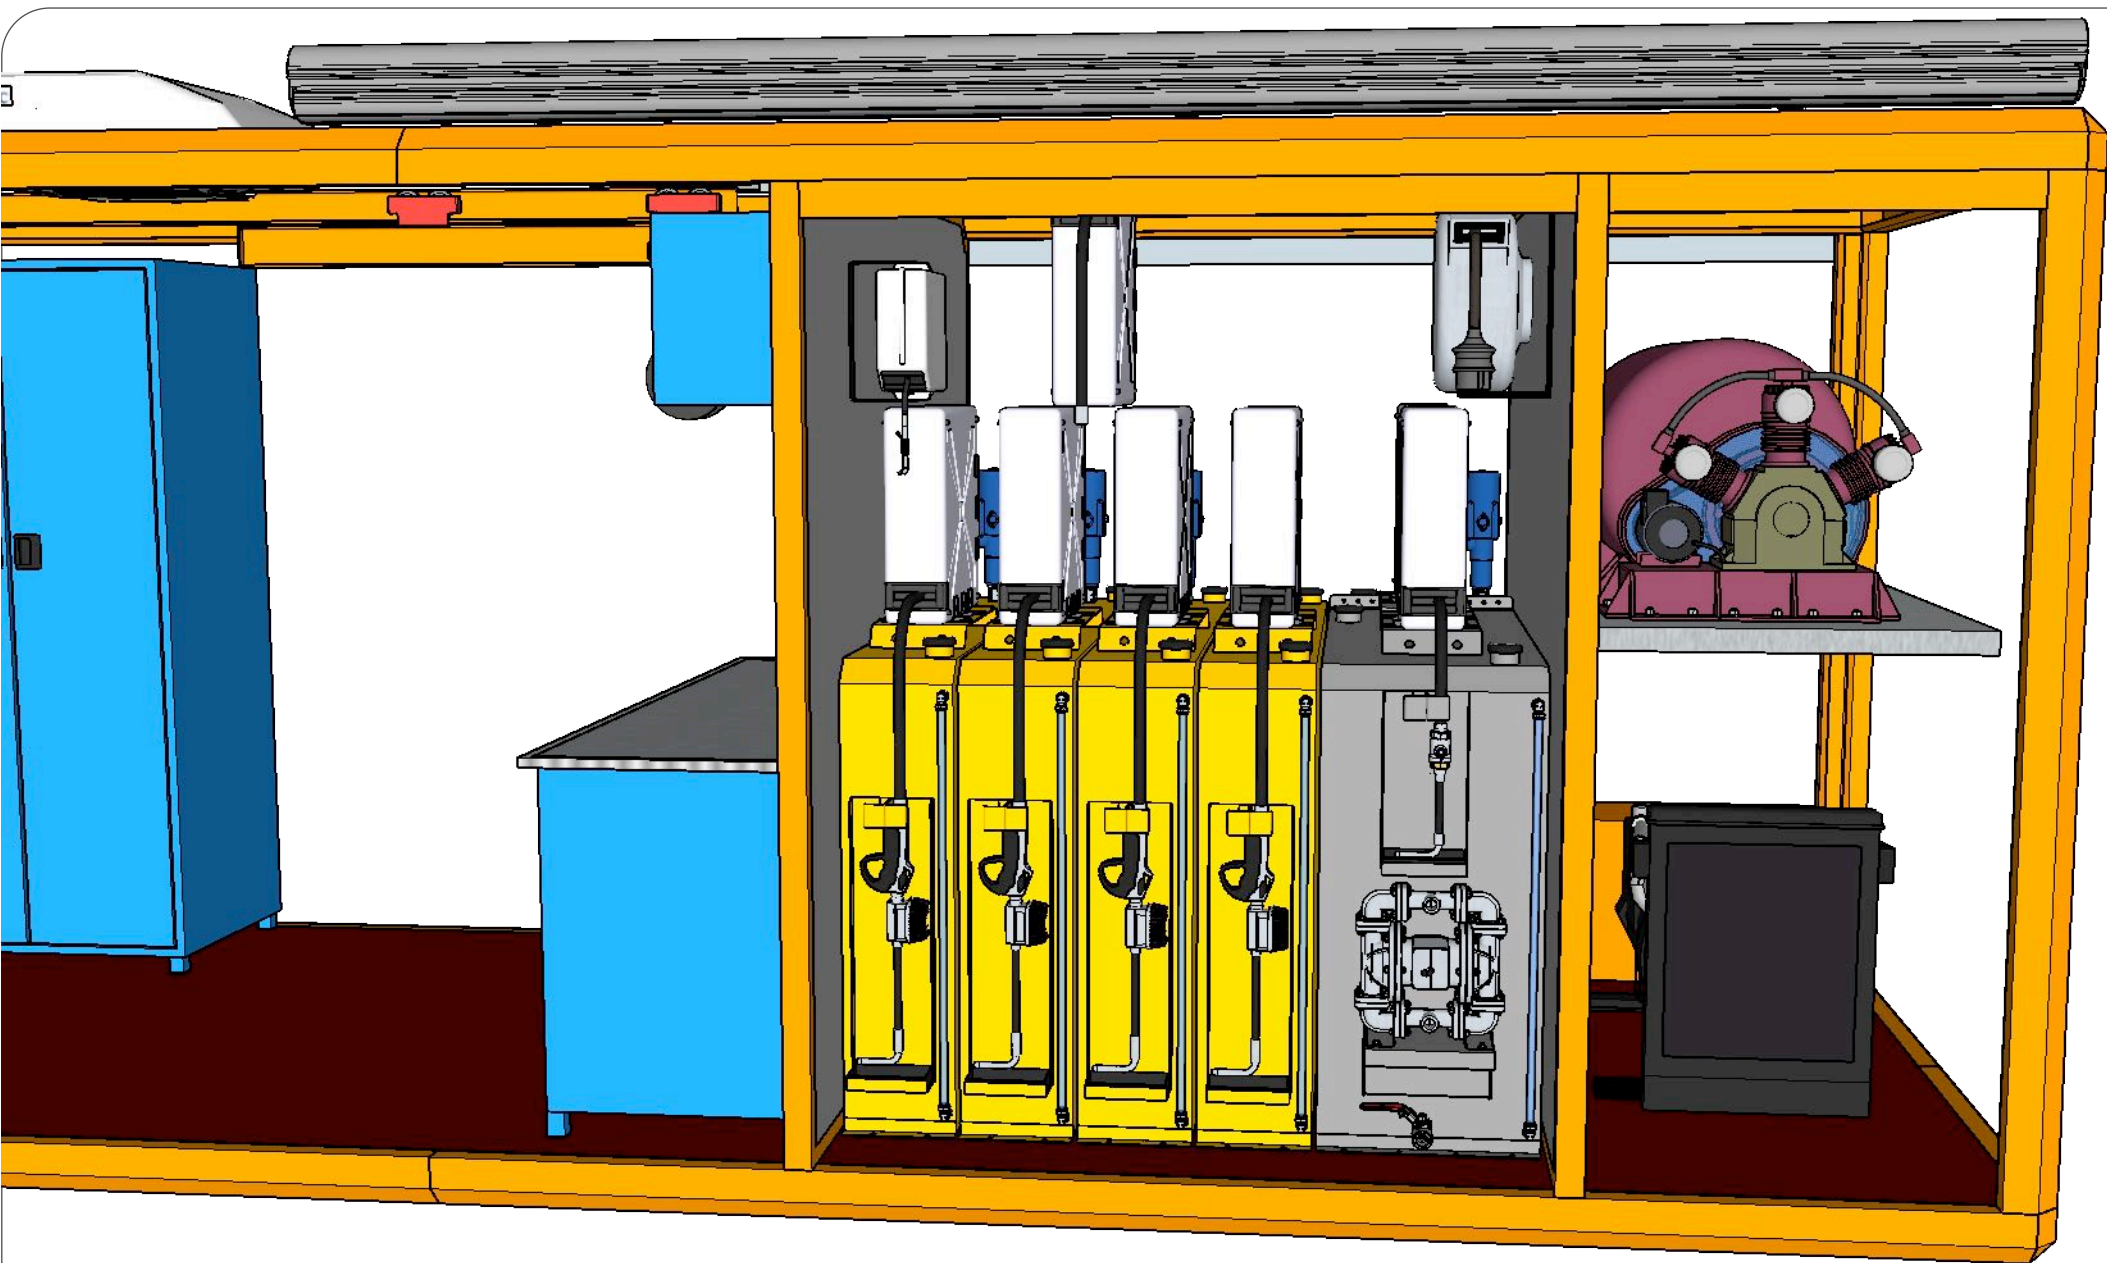

Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**

Explanation


...

Info

Date : 04.10.2021  
 Rev. : 03  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 08**



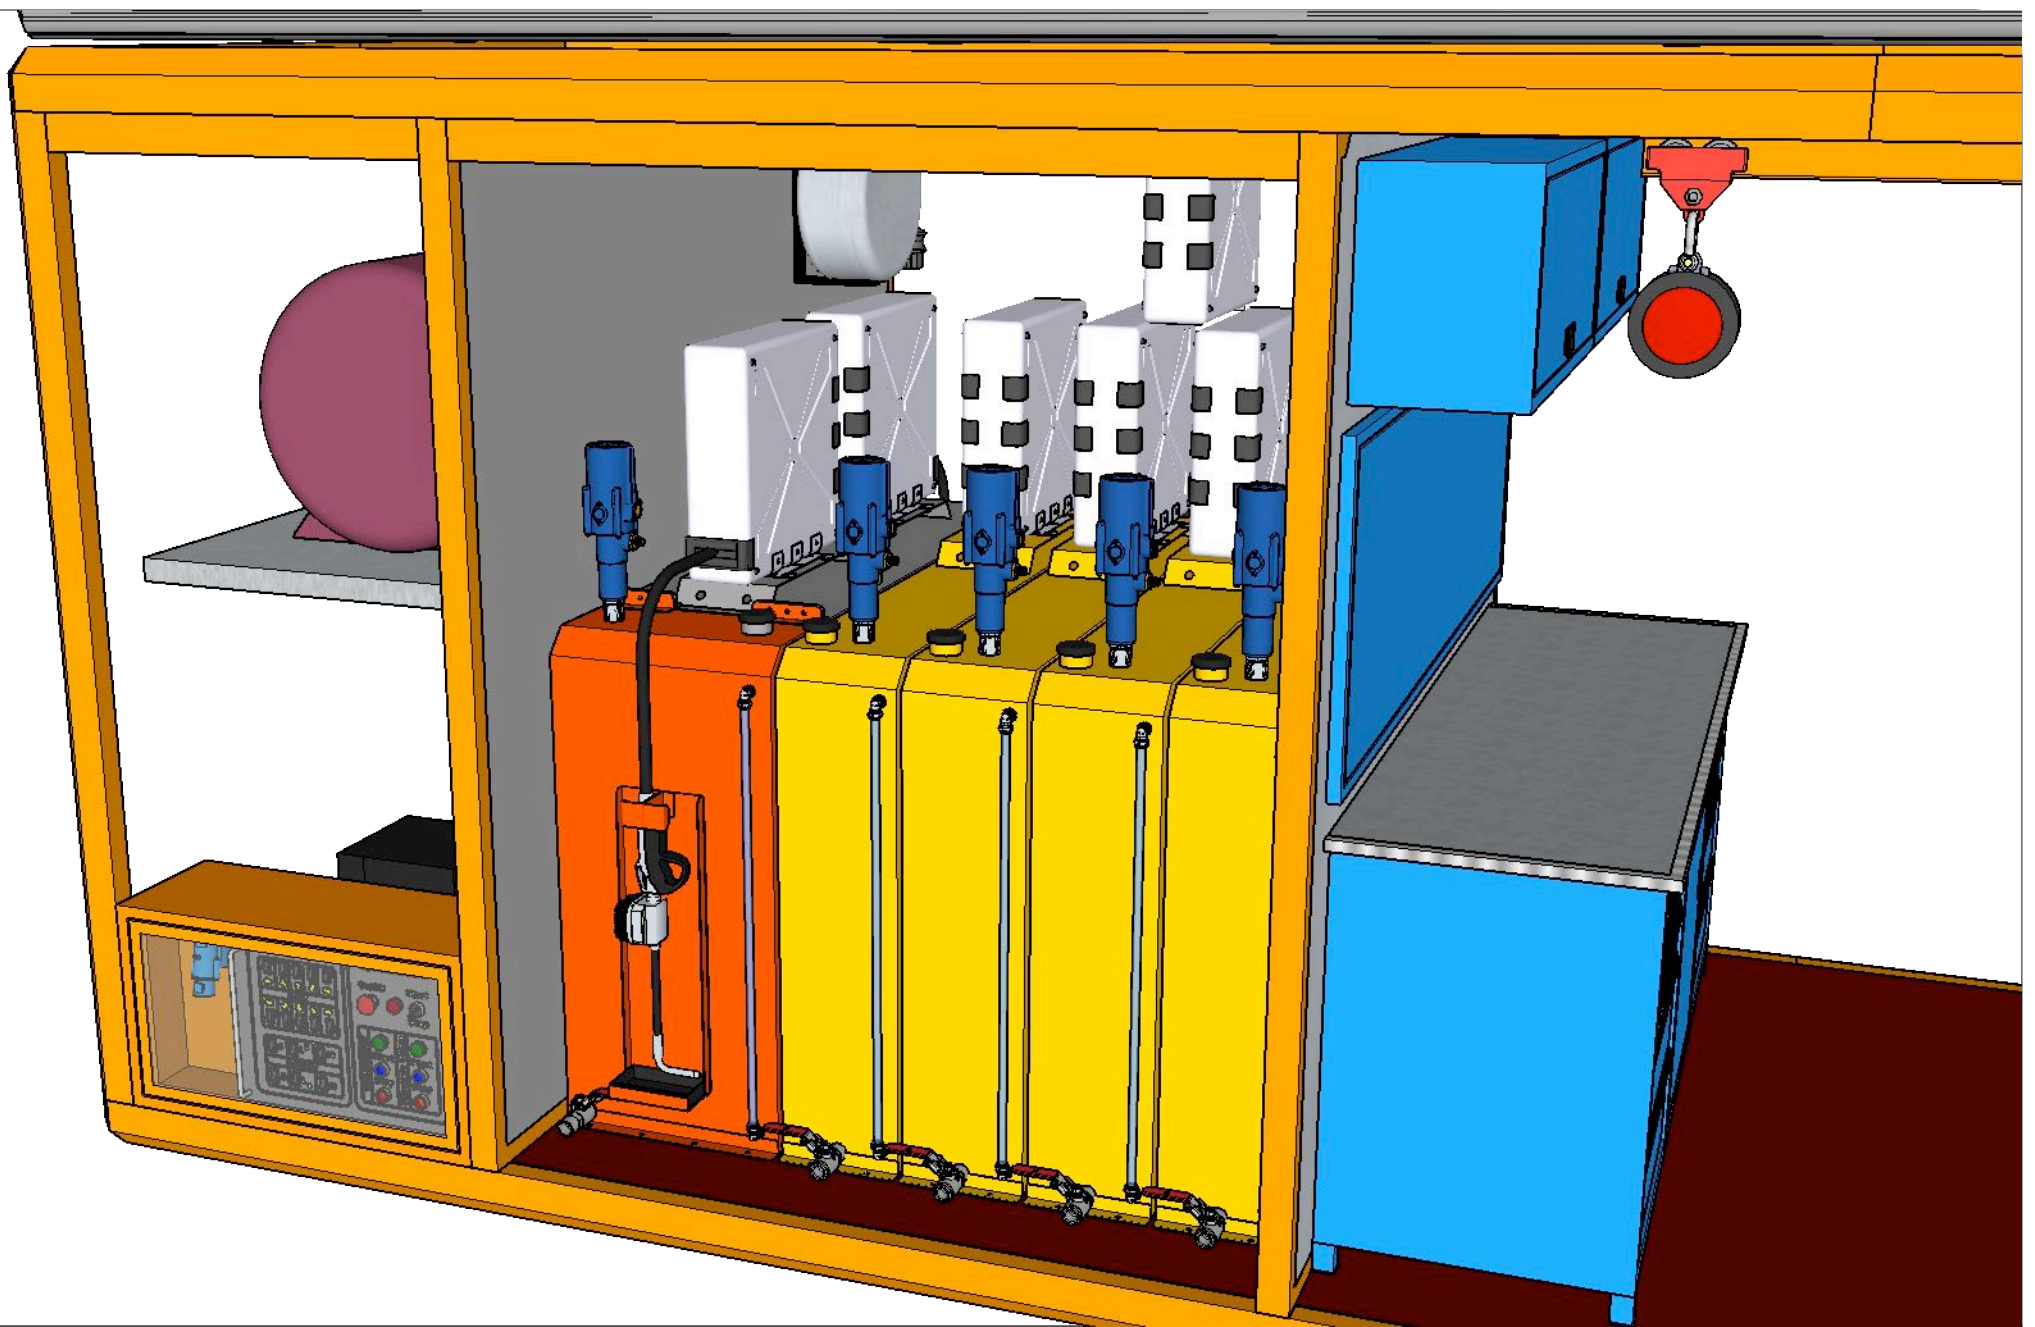








Project / Model  
**21.037**  
**MWS 2.1**  
**Lubrication Truck**

Explanation  
 ...







Info  
 Date : 04.10.2021  
 Rev. : 03  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A** **09**

Equipment	Explanation	Brand / Orjin	Quantity	
	<b>Bodywork</b> MWS Insulated Body - 6,80 Mt.	ALURA / Turkey	1	pcs
	<b>Aluminum Shutters</b> Manuel Working Locking Systems Size : 1800 x 2000 mm	CELIKSAN / Turkey	4	pcs
	<b>Work Bench</b> Width: 1.800 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg. Shelf Carrying Cap ..: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Telescopic rails with 100% opening in drawers Central locking system in drawers Electrostatic powder paint Suspension boards modular Standard 2 220V sockets in electrically connected workbenches	ALURA / Turkey	1	pcs
	<b>Industrial Cabinet</b> Drawers: 8 Height Adjustable Shelves: 3 Width : 1010 mm Depth : 615 mm Height : 2.000 mm These are leaf door, heavy load cabinets. They are welded, stabşe 1.20 mm sheet constructions. Electrostatic powder coated. There are round edged, embedded stripe channel, eloxal aluminium lugs and there are plastic taps on the lug heads.	ALURA / Turkey	1	pcs
	<b>Generator Diesel</b> Standby/Prime Power: 33 kVa / 30 kVa Standard Voltage: 400/230 V / 3 Phase Engine Bran: Perkins Engine Model: 1103A-33TG1 Alternator: Sincron RPM: 1500 rpm. Frequency: 60 Hz. Water Cooling	POWER / Turkey	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	<b>Pistone Compressor</b> Electric Motor : 380 V Capacity: 630 Lt/min Pressure : 12 Bar Cylinder: 2 pcs Power: 7,5 Hp	AYKOM / Turkey	1	pcs
	300 Lt Air Tank	AYKOM / Turkey	1	pcs
	<b>Air Conditioning</b> Cooling Power: 3200 W Cooling Capacity: 10.900 btu Consumption Cooling: 1350/1600 W Input Voltage: 230/50 V - 60 V / Hz Current Cooling: 6.3 / 6.9 A Required Fuse: 7 A Number of Blowers: 4 automatic Heat Control Yes: Thermostatic Refrigerant: R407c	TERMOSA / Holland	1	pcs
	<b>Air Conditioning</b> Cooling Capacity : 16.000 btu Input Voltage : 230/50 V / Hz Current Cooling : 6.3 / 6.9 A Required Fuse : 7 A Thermostatic Heat Control Yes Refrigerant : R410a	TOSHIBA / Turkey	1	pcs
		TOSHIBA / Turkey	1	pcs
	<b>Awning</b> Articulated awning 3,600 mm x 2500 mm	TENTEKS / Turkey	2	pcs
	<b>Welding Machine</b> Coated Electrode Enabling Rate : 250 A, 40% Voltage / Frequency : 220 /230 V 50/60 Hz Power : 8.7 Kw Welding Ampere Range : 10-250 A Dimensions : 285x190x420 Weight : 9.3 kg Electrode Diameter : 1,6-5 Ø Accessories: 6 m. welding pliers, 6m.	BLUWELD / Italy	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	<b>Oxygen Pressure Regulator</b> Acet.- With Protection: 1 pc. Shank: 1 pc. Cutting Torch: 1 pc. Acetylene Cutting Nozzles: 1 pc. Welding Attachment No: 4 : 1 pc. Flashback Arrester for Torch - Fuel Gas : 1 pc. Flashback Arrester for Torch- Oxygen : 1 pc. Nozzle Cleaner : 1 pc. Spark Lighter : 1 pc. Oxygen Welding Goggles : 1 pc. Welding Gloves : 1 pcs. Light : 1 pc - 9 leds and 3 pcs batteries Plastic Kit : 1 pc Plastic Kit	YILDIZ / Turkey	1	pcs
	Oxygene / Acetylene Welding Hose 8 mm 25 mt.	YILDIZ / Turkey	1	pcs
	<b>Welding Oxy - Acetylene</b> Fixed hose reel For welding 20 bar Without hose Arrangement for double inlet-outlet. Inlet-outlet G 3/8" (m) Hose 15 mt	RAASM / Italy	1	pcs
	Acetylene & Oxy Cylinder	HABAS / Turkey	1	pcs
	<b>Welding</b> Oxy - Acetylene Cylinder Trolley	ALURA / Turkey	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	<b>Lubrication Oil Set</b> Pneumatic pumps for oil Flow rate: 20 l / min Ratio: 3: 1 Compatible fluids: Oils Suction tube upper body: Aluminum Suction tube: Carbon Steel Air inlet connection: G 1/4 Fluid outlet connection: G 1/2 Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE Weight: 5 kg "			
	<b>Drum Hose Reels</b> Pressure: 150 bar Compatible fluids: Oils and Similar Swivel joint: Zinc Plated Steel Seals: Polyurethane Material: Painted Steel Couplings: Zinc Plated Steel Inlet: G 1/2 "f Outlet: G 1/2 "m Reel flow path: Internal drum width: 110 m "	RAASM / Italy	5	pcs
	Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 degrees to +100 degrees Size: 1/2 " Pressure: 160 bar Length: 15 mt "			
	<b>Guns for dispensing</b> Flu: Technopolymer Terminal: Flexible Drip-catcher: Semiautomatic ø 16 mm Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes "			
	<b>Oil Tank</b> Metal Prisma Tank 2 mm / 125 Lt.	ALURA / Turkey	1	pcs
	<b>Oil Tank</b> Metal Prisma Tank 2 mm / 400 Lt.	ALURA / Turkey	4	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	<p><b>Lubrication Oil Transfer Tank Set</b>  Pneumatic pumps for oil  Flow rate: 20 l / min  Ratio: 1: 1  Compatible fluids: Oils  Suction tube upper body: Aluminum  Suction tube: Carbon Steel  Air inlet connection: G 1/4  Fluid outlet connection: G 1/2  Air working pressure: 6/8 bar  Average air consumption: 230 l / min  Noise level: 81 dB  Oil viscosity: 80 SAE  Weight: 5 kg</p> <p>Pump Seat Plate: 3 Sets  Pu Single row steel wire braid with high tensile strength  High resistance to oil and wear  Operating temperature -40 C to +100 C  Size: 1/2 "  Pressure: 160 bar  Length: 6 mt</p>	RAASM / Italy	<b>1</b>	pcs
	<p><b>Waste Oil Systems Set</b>  Flow rate: 70 l / min  Ratio: 1: 1  Max pressure: 8 bar.  Max cycles for minute: 400 cpm.  Max suction lift: wet column 7,5  Max working temperature: 100 ° C  Noise level: 70 dB  Air working pressure: 2/6 Bar  Membranes: EPDM  Balls: Acatel "</p> <p>Pressure: 150 bar.  Compatible fluids: Oils  Swivel joint: Zinc plated steel  Seals: Polyurethane  Characteristic: Fixed  Material: Painted steel  Inlet: G 1/2 "(f)  Outlet: G 1/2 "(f)  Reel flow path: Zinc plated steel  Internal drum width: 110 mm "</p> <p>Waste oil gravity and suction drainers</p> <p>Single row steel wire braid with high tensile strength  High resistance to oil and wear  Operating temperature -40C to +100 C  Size: 1/2 "  Pressure: 160 bar  Length: 15 mt</p>	RAASM / Italy	<b>1</b>	pcs
	<p><b>Waste Oil Tank</b>  Metal Prisma Tank  2 mm / 1000 Lt.</p>	ALURA / Turkey	<b>1</b>	

Equipment	Explanation	Brand / Orjin	Quantity	
	<p><b>Waste Oil</b>            Floor waste oil drainer            50 litre with quick release            Connector line.</p>	RAASM / Italy	1	pcs
	<p><b>Air Reel</b>            Length hose: 11 m            Length hose con. : 1.5 m            Hose diameter: 8 x 12 mm            Inlet connection thread: G 1/4"            Max working pressure: 10 bar</p>	RAASM / Italy	1	pcs
	<p><b>Air Reel</b>            Pressure: 20 bar.            Compatible fluids: Air            Swivel joint: Stainless Metal            Seals: Polyurethane            Characteristic: Fixed            Material: Painted steel            Inlet: G 1/2 " (f)            Outlet: G 1/2 "(f)            Reel flow path: Zinc plated steel            Internal drum width: 110 mm</p> <p>Single row steel wire braid with high tensile strength            High resistance to oil and wear            Operating temperature -40 C / +100 C            Size: 1/2 "            Pressure: 10 bar            Length: 25 mt.</p>	RAASM / Italy	1	pcs
	<p><b>Electric Reel</b>            415 VAC 3 phase - 240 VAC 1 phase            Auto Loopback            Thermoplastic Cable            4 socket outlet            240 VAC 3 pcs            380 VAC 1 pcs</p>	ZECA / Italy	2	pcs
	<p><b>Battery Charger</b>            Single Phase Mains Voltage 230 V Mains Frequency            50 / 60 Hz Charge Power 1 Kw            Start Power 6,4 Kw            Charging Voltage 12 / 24 V            Effective Charging Current 45 A            Rated Charge Curr. 30 A            Start Current 1V/C 180 A            Max Starting Current 300 A            Min. Rated Reference Capacity 20 Ah            Max Rated Reference Capacity 700 Ah</p>	TELWIN / Germany	1	pcs

Equipment	Explanation	Brand / Orjin	Quantity	
	<b>Electric Crane</b> Capacity: 600 / 1.200 kg Lifting height: 10 mt Lifting speed: 10/5 m / min Rope length: 20 mt Engine power: 930 W Voltage: 220-50 V / Hz"	ATLAS / Kore	1	pcs
	<b>Bench Vice</b> Size : 100 mm Jaw Width : 100 mm Total Length : 300 mm Arvil Size : 40x60 mm Vice Heaighy : 110 mm	GAMA / Turkey	1	pcs
	<b>Lighting</b> Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Consumption Power: 28 W / 38 W / 55 W Input Voltage: 220-240V AC 50/60 Hz CRI: >80 IP Value: IP65 Usage: Surface Mounted	EAE / Turkey	1	pcs
	<b>Outdoor Lighting</b> 30 Watts: 5800 Lumens Size: 120x130 mm Working life: 30,000 hours Standard: IP67	ALURA / Turkey	10	pcs
	Control panel of all equipment. Generator / Mains power connection.	ALURA / Turkey	1	pcs
	<b>Fire extinguisher</b> Capacity: 6 kg. Full Weight: 9.1 kg. Working Pressure: 18 bar. Discharge Time: 14 sec. Extinguishing Agent: MAP@ (ABC)	ALURA / Turkey	2	pcs
	<b>Pressure Regulator</b> Air Inlet: 1/2 inch Filter : 20U Working Pressure : 05-9.9 Atu Working temperature : 5-60 ° C Water Capacity : 80 MI Air Permeability : 2200Lt / Dk	OSAKA / Japan	1	pcs