
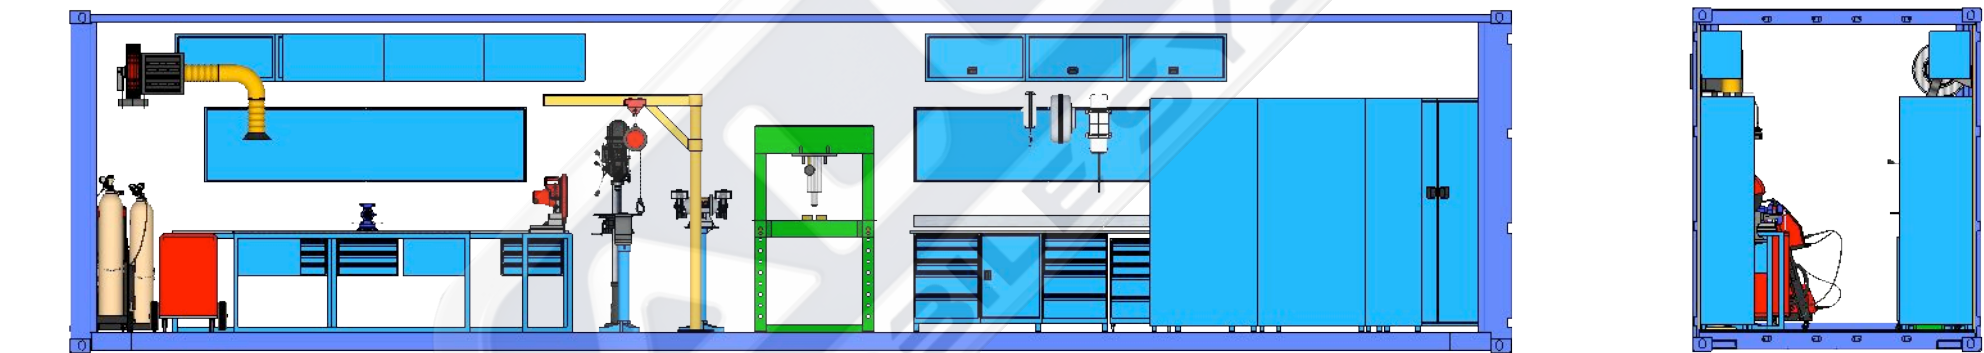


Project / Model  
**23.006**  
**40' Mechanical Service Container**

Explanation  
 40' HQ ISO Container

Info  
 Date : 20.01.2023  
 Rev. : 00  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 01**

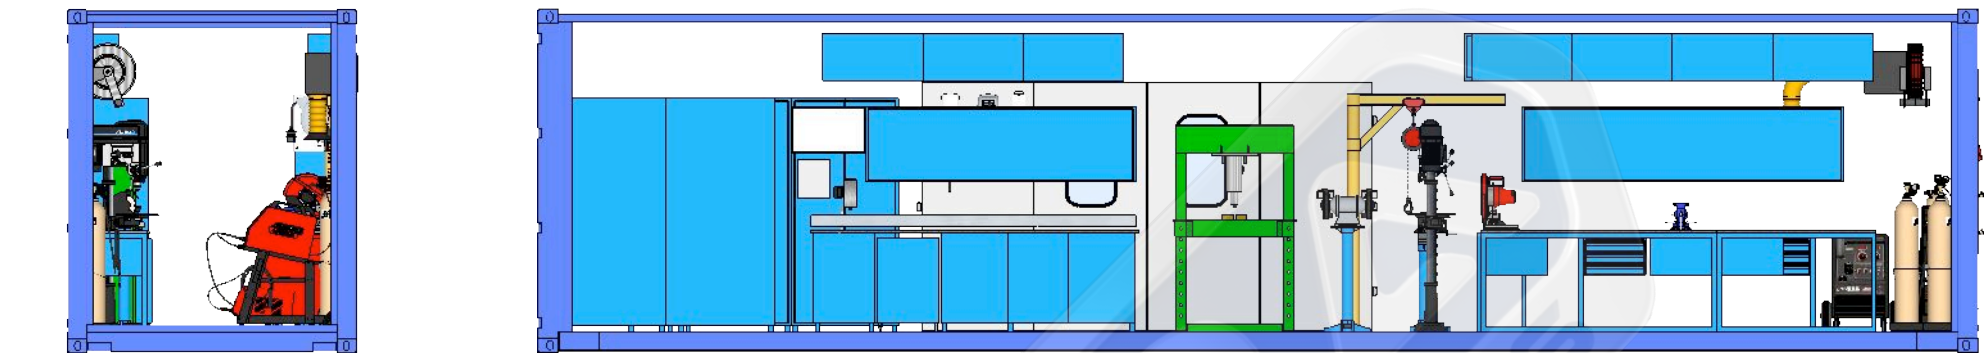


Project / Model  
**23.006**  
**40' Mechanical Service Container**

Explanation  
 40' HQ ISO Container

Info  
 Date : 20.01.2023  
 Rev. : 00  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 02**

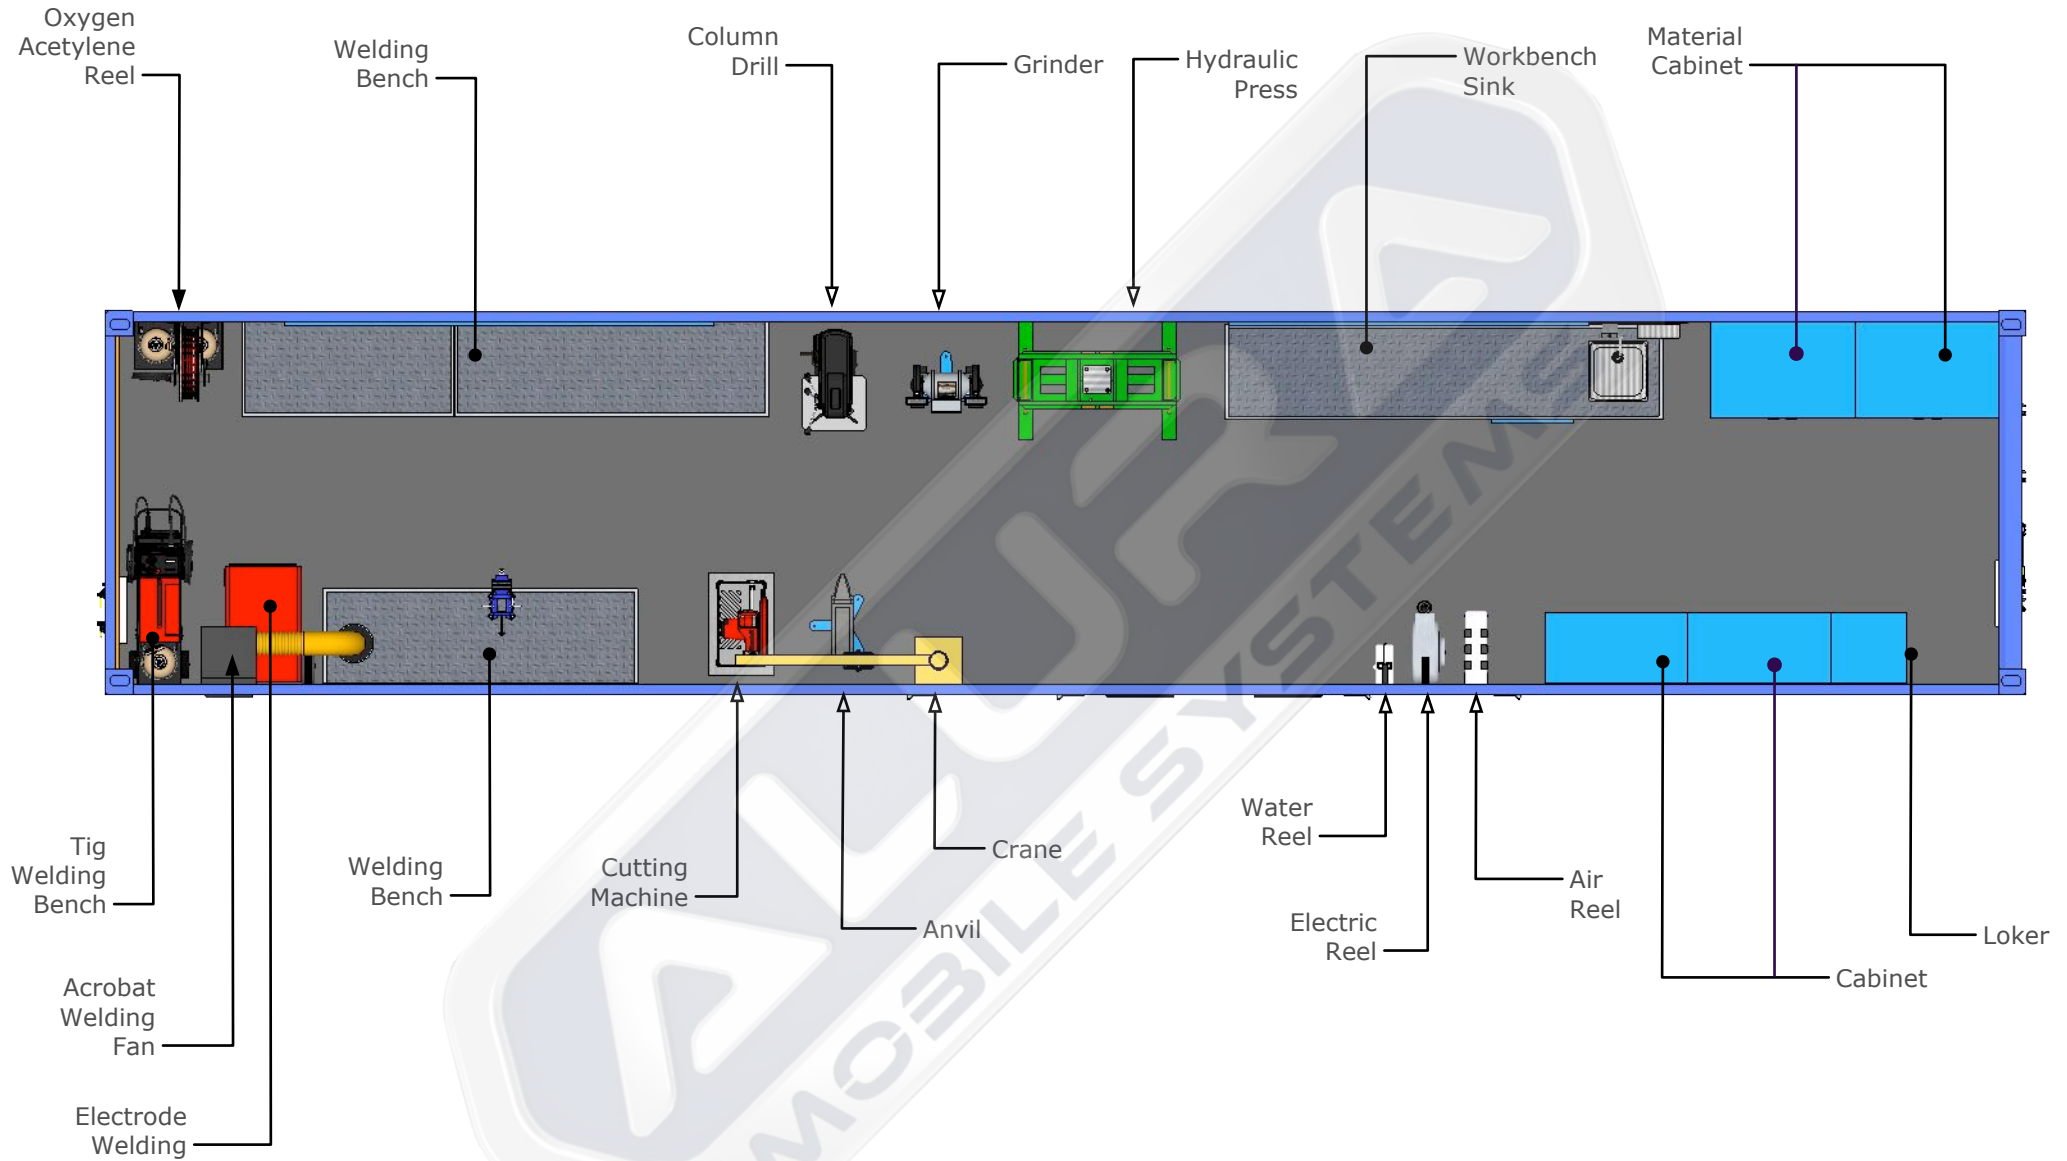


Project / Model  
**23.006**  
**40' Mechanical Service Container**

Explanation  
 40' HQ ISO Container

Info  
 Date : 20.01.2023  
 Rev. : 00  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 03**



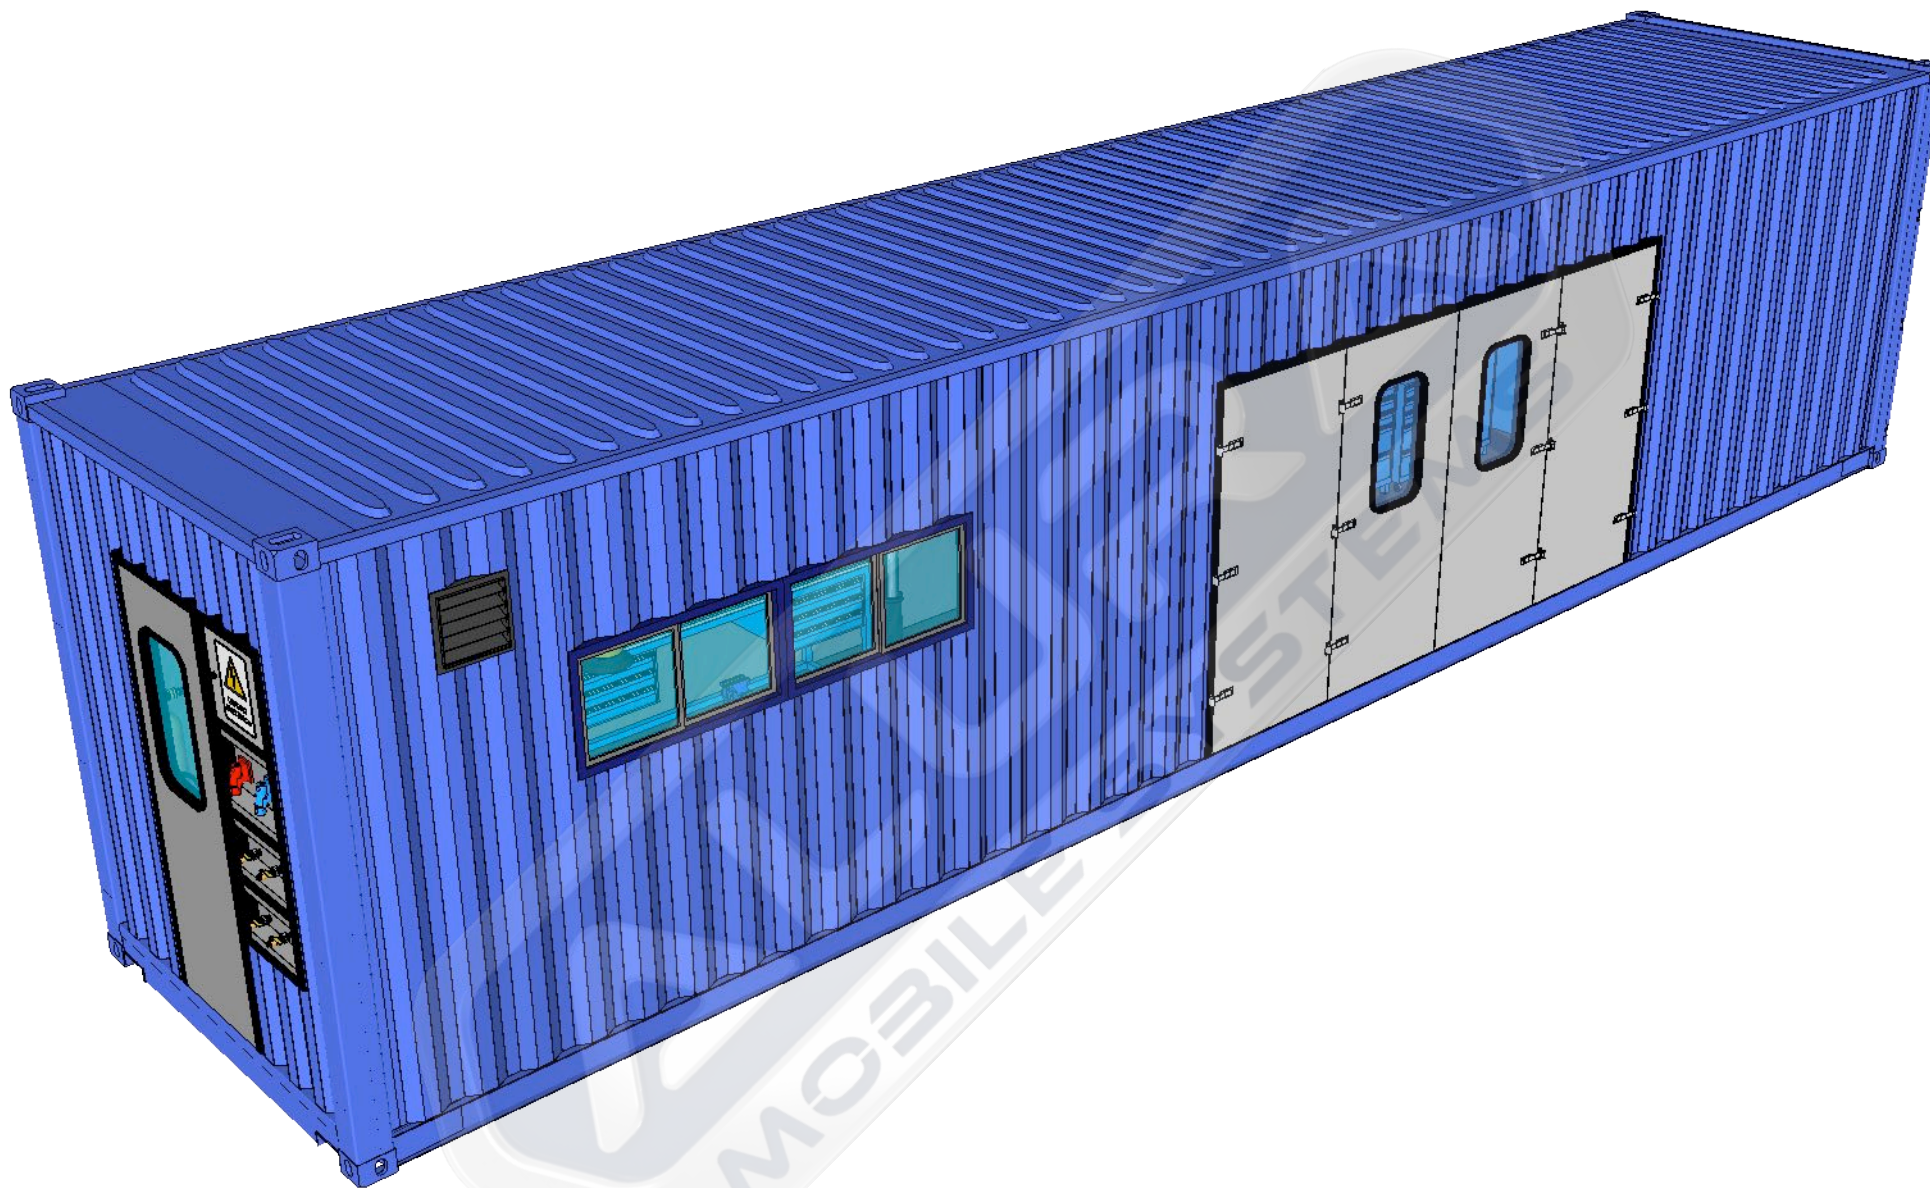

Project / Model

**23.006**  
**40' Mechanical Service  
Container**

Explanation

40' HQ ISO Container

Info

Date : 20.01.2023  
Rev. : 00  
Per. : Metin ALCAR  
Tel : 0544 242 04 91  
Mail : sales@aluratrailer.com

**A 04**





Project / Model

**23.006**  
**40' Mechanical Service Container**


Explanation

40' HQ ISO Container

Info

Date : 20.01.2023  
Rev. : 00  
Per. : Metin ALCAR  
Tel : 0544 242 04 91  
Mail : sales@aluratrailer.com

**A 05**

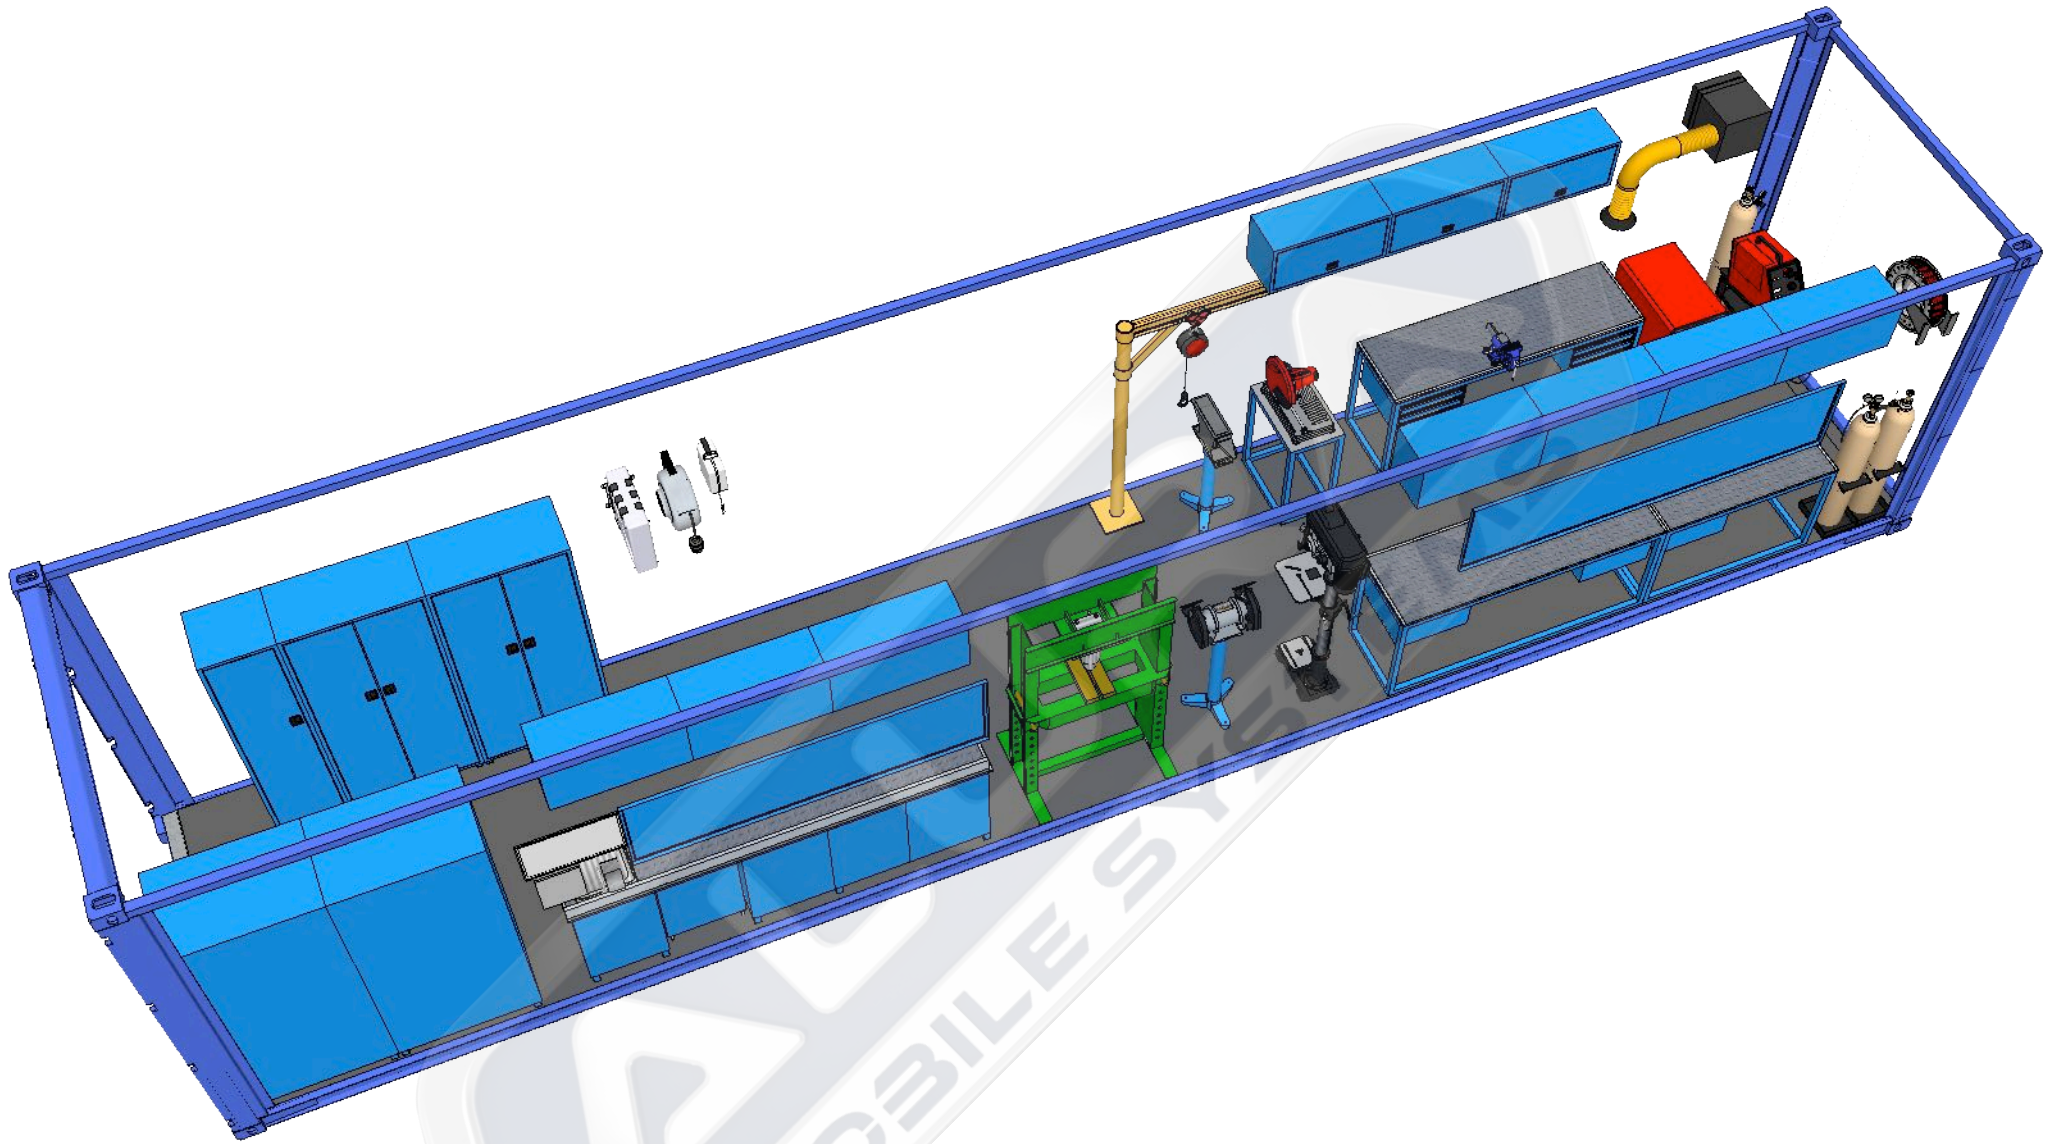


Project / Model  
**23.006**  
**40' Mechanical Service Container**

Explanation  
 40' HQ ISO Container

Info  
 Date : 20.01.2023  
 Rev. : 00  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 06**



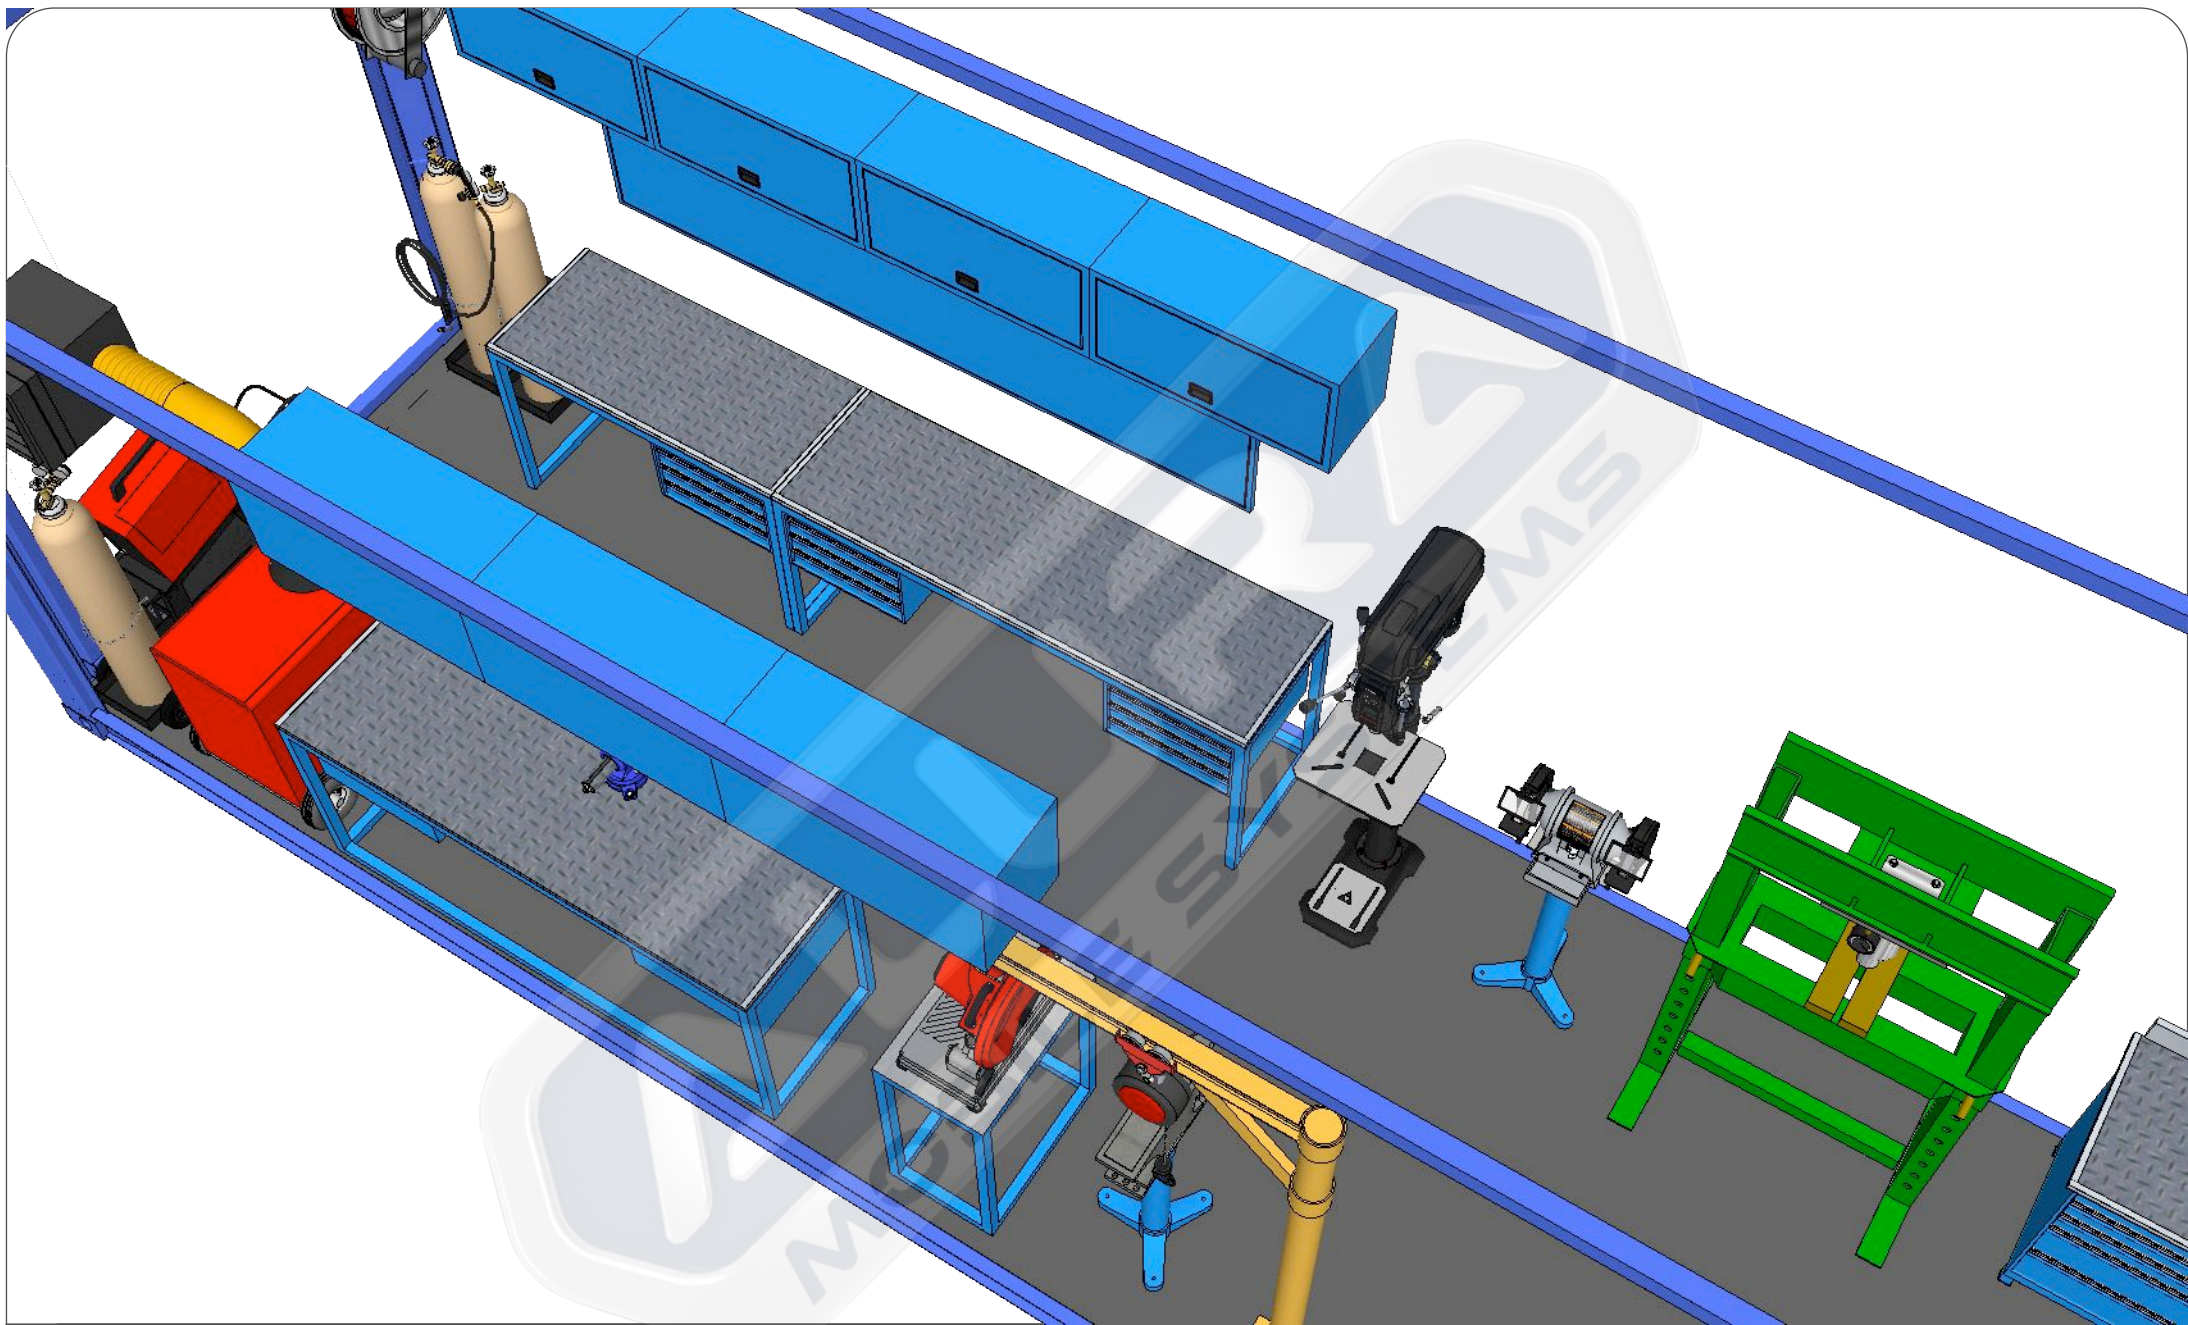


Project / Model  
**23.006**  
**40' Mechanical Service Container**

Explanation  
 40' HQ ISO Container

Info  
 Date : 20.01.2023  
 Rev. : 00  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 07**

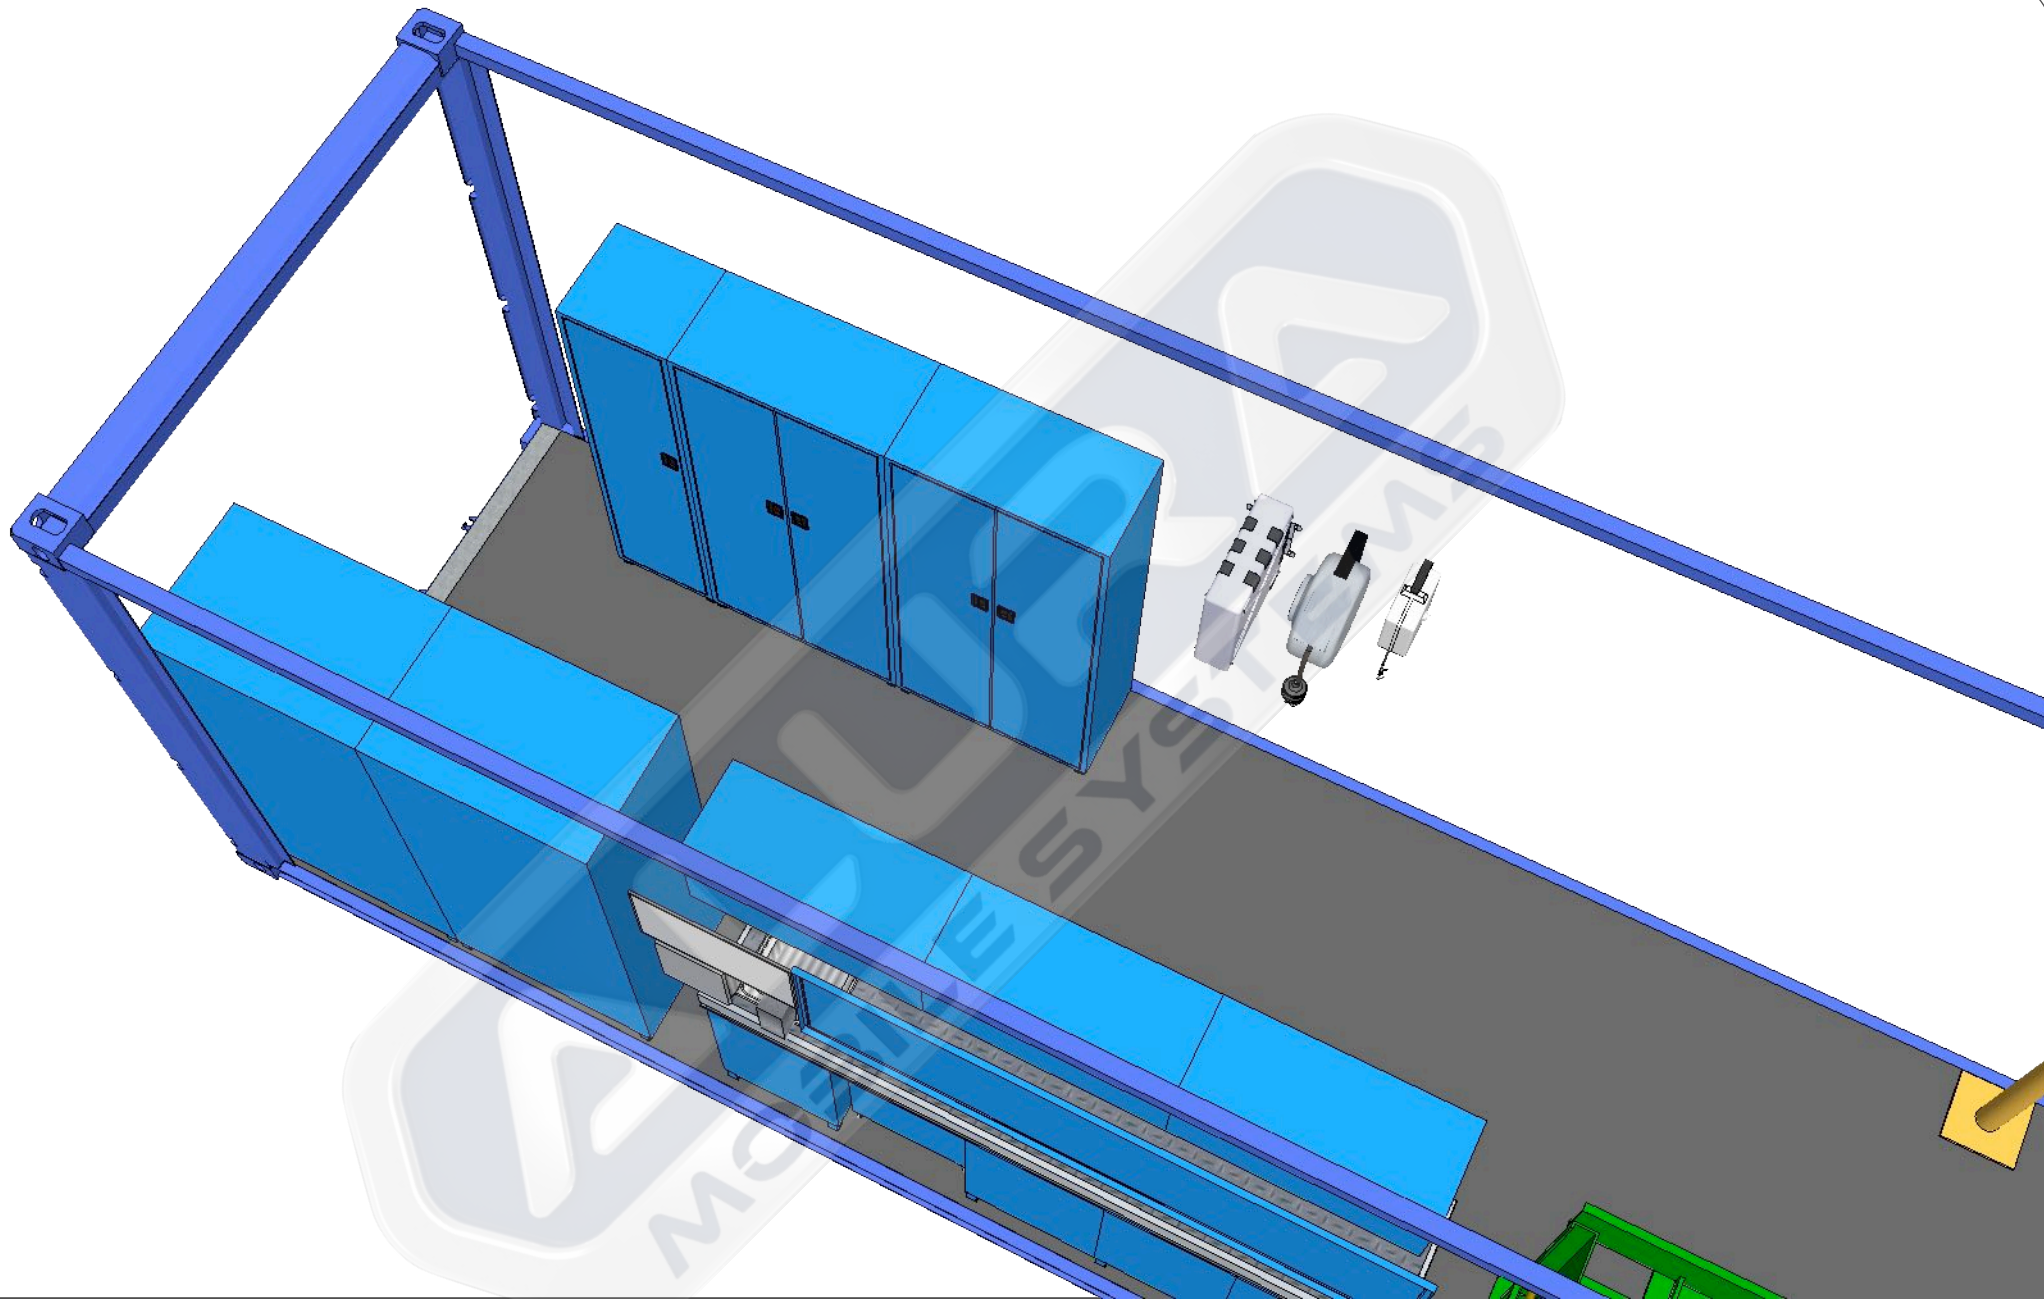

Project / Model  
**23.006**  
**40' Mechanical Service Container**







Explanation  
40' HQ ISO Container

Info  
Date : 20.01.2023  
Rev. : 00  
Per. : Metin ALCAR  
Tel : 0544 242 04 91  
Mail : sales@aluratrailer.com

**A 08**



| No | Equipment   | Explanation  | Producer   | Orjin  | Piece |
|----|---|--|--|--------|-------|
| 1  | Bodywork  |  | Alura  | Turkey | 1     |
|    |     | 40' HQ / ISO Container<br>External Dimensions<br>Length: 12.192 mm<br>Width: 2.432 mm<br>Height: 2.896 mm<br>Internal Dimensions<br>Length: 12.024 mm  | Width: 2.350 mm<br>Height: 2.697 mm<br>Area : 76.2 m3Tare: 4.020 kg.<br>Insulation: Polyurethane 30 mm<br>Inner coating: Alukobond 4 mm<br>Floor: Polywood 18 mm<br>Floor Covering: PVC 2,5 mm |        |       |
| 2  | Pistone Compressor  |  | Aykom  | Turkey | 1     |
|    |     | Chassis Piston Air Compressor<br>Engine Power: 5.5 hp<br>Air Intake: 630 lt/min<br>Revolution : 950 rpm<br>Pressure : 12 bar<br>Working Power : 380 V  |  |        |       |
| 3  | Air Tank  |  | Alura  | Turkey | 1     |
|    |  | Capacity : 300 lt.<br>Working Pressure: 15 bar.<br>Test Pressure: 15 Bar.<br>Sheet Thickness: 4 mm.<br>Compressor Connection : 1"<br>Air Outlet : 1/2"   |  |        |       |
| 4  | Work Bench  |  | Alura  | Turkey | 1     |
|    |  | Width: 1.800 mm<br>Depth: 700 mm<br>Height: 2.000 mm<br>Number of Drawers: 10<br>Drawer Carrying Capacity: 60 kg.<br>Shelf Carrying Cap .: 80 kg.  | Socket 2 Pieces<br>25 mm MDF + Pvc on worktops<br>Electrostatic powder paint<br>Suspension boards modular  |        |       |
| 5  | Metal Cabinet   |  | Alura  | Turkey | 2     |
|    |  | WxDxH: 1.000 x 450 x 2.000 mm<br>Body and carriers 0.80 - 1.2 mm<br>It is long-lasting and durable.<br>The covers are double wing reinforced.<br>Number of Shelves: 7 Pieces<br>Shelf Carrying Cap .: 80 kg. | Variable drawer groups   |        |       |

| No | Equipment   | Explanation  | Producer  | Orjin  | Piece |
|----|---|--|---|--------|-------|
| 6  | Workbench   |  | Alura   | Turkey | 1     |
|    |    | Wheeled Drawer<br>Width: 600 mm<br>Depth: 465 mm<br>Height: 950 mm<br>Number of Drawers: 6 Pieces<br>Drawer Transport Cap. : 60 kg.  |   |        |       |
| 7  | Metal Cabinet   |  | Alura   | Turkey | 2     |
|    |    | Width: 1.000 mm<br>Depth: 450 mm<br>Height: 2000 mm<br>Number of Shelves: 7 Pieces<br>Shelf Carrying Cap .: 80 kg.<br>Variable drawer groups   | Body and carriers 0.80 - 1.2 mm sheet metal<br>It is long-lasting and durable.<br>The covers are double wing reinforced.    |        |       |
| 8  | Ventilation   |  | BVN   | Turkey | 1     |
|    |   | Case Size: 560 X 560 mm<br>Depth: 260 mm.<br>Blade Diameter: 22 inch.<br>Blade Material: Galvanized Engine<br>Power: 0.34 hp.<br>Air Flow: 9.000 m3 / h-PA   |   |        |       |
| 9  | Smoke Suction Fan   |  | BVN   | Turkey | 1     |
|    |   | 3 Mt Wall Mounted Acrobat Arm<br>FB PRO MIN SERIES acrobat<br>arms, thanks to their flexible -<br>mobile structure, allow dust, smoke<br>and particle emissions to be<br>caught at the point where they are<br>released. | without spreading to the environment.<br>Hose options with different<br>specifications for various powder types.            |        |       |
| 10 | MMA Welding Machine   |  | Magmaweld   | Turkey | 1     |
|    |  | Mains Voltage : 400 V<br>Power Drawn from the Network:<br>19.6 kVA<br>Welding Current Set Ran : 5-350 A<br>Rated Welding Current : 350 A<br>Open Circuit Voltage: 86 V   | Electrode Diameter : 1.60 - 5.00 mm<br>Dimensions : 585 x 307 x 515 mm<br>Weight : 32 Kg<br>Protection Class IP21           |        |       |
| 11 | MIG/MAG Welding Machines  |  | Magmaweld   | Turkey | 1     |
|    |  | Mains Voltage: 400 V<br>Power : 14.5 kVA<br>Welding Curr. Sett Ran.: 50 - 300 A<br>Rated Welding Current: 300 A<br>Open Circuit Voltage: 82 V<br>Dimensions:1170x528x1348 mm   | Weight: 103.5 Kg<br>Welding Wire Diameter: 0.80-1.20 mm<br>Wire Feeding Speed: 1 - 24 m/min<br>Torch Trigger Control: 2 / 4 |        |       |









| No  | Equipment                            | Explanation   | Producer | Orjin   | Piece |
|---|--------------------------------------|---|----------|---|-------|
| 12  | <b>Oxygen Pressure Regulator</b>     |   |          |   | 1     |
|    |                                      | Acet.- With Protection: 1 pc.<br>Shank: 1 pc.<br>Cutting Torch: 1 pc.<br>Acethylene Cutting Nozzles: 1 pc.<br>Welding Attachment No: 4 : 1 pc.<br>Flashback Arrester for Torch - Fuel |          | Gas : 1 pc. Flashback Arrester for Torch-<br>Oxygen : 1 pc. Nozzle Cleaner : 1 pc.<br>Spark Lighter : 1 pc.<br>Oxygen Welding Goggles : 1 pc.<br>Welding Gloves : 1 pcs.<br>Light : 1 pc - 9 leds and 3 pcs battaries |       |
| 13  | <b>Welding Oxy - Acethylene Reel</b> |   | Raasm    | Italy   | 1     |
|    |                                      | Fixed hose reel<br>For welding<br>20 bar<br>Without hose<br>Arrangement for double inlet-outlet. Inlet-outlet G 3/8" (m)  |          | Hose 15 mt  |       |
| 14  | <b>Acetylene &amp; Oxy Cylinder</b>  |   | Habaş    | Turkey  | 1     |
|   |                                      | Acetylene & Oxy Cylinder  |          |   |       |
| 15  | <b>Water Tank</b>                    |   | Alura    | Turkey  | 1     |
|  |                                      | Capacity : 500 Ltr<br>Made of Stainless Steel<br>Level Indicator<br>Filling tap<br>Pump stabilizer<br>1" Discharging valve  |          |   |       |
| 16  | <b>Water Pump</b>                    |   | Karcher  | Germany   | 1     |
|  |                                      | Maximum Motor power : 1000 W<br>Maximum Water Flow: 4500 l/hour<br>Maximum pressure: 50/5 m/bar<br>Working pattern: 1.9 - 3 bar<br>Maximum suction : 8 m<br>Connection type : G1      |          | Power Cable H05RN-F : 1 m<br>Weight without accessories : 14.7 kg   |       |
| 17  | <b>Water Hose Reel</b>               |   | Karcher  | Germany   | 1     |
|   |                                      | Pressure: 20 bar.<br>Compatible fluids: Water<br>Swivel joint: Stainless Metal<br>Seals: Polyurethane<br>Characteristic: Fixed<br>Inlet: G 1/2 " (f)                                  |          | Outlet: G 1/2 "(g)<br>Operating temperature -40 C / +80 C<br>Size: 1/2 "<br>Pressure: 10 bar<br>Length: 20 mt   |       |







| No | Equipment   | Explanation  | Producer  | Orjin   | Piece |
|----|---|--|---|---------|-------|
| 18 | Air Hose Rell   |  | Raasm   | Turkey  | 1     |
|    |    | Pressure: 20 bar<br>Hose Length: 15 mt<br>Compatible fluids: Air<br>Material: Painted Steel<br>Inlet-Outlet : G 1/2 "f - G 1/2 "m<br>Operating temperature: -40 / +100 |   |         |       |
| 19 | Air Gun   |  | Raasm   | Italy   | 1     |
|    |    | Professional Blow Gun  |   |         |       |
| 20 | Cable Roller  |  | Mavel   | Italy   | 1     |
|    |   | 20 Mt 5*1.5 Mm<br>Three Phase : 220 Volt / 415 V<br>Cable Thickness: 5*1.5 Mm2<br>Cable Length: 20 Mt<br>Cable Type : H07RN-F<br>Power : 1000-3000 W                   | Auto Rewind<br>Plastic outer cover steel swivel wall bracket<br>Weight: 9 Kg<br>Dimensions: 42x39x23 Cm |         |       |
| 21 | Hand Drill  |  | Bosch   | Germany | 1     |
|    |   | Drilling Machine:710 W<br>Rated power input: 365 W<br>Power output: 3-16 mm<br>Bore Range :2,4 kg<br>Weight: 1000 / 3000 rpm   |   |         |       |
| 22 | Drill Bit   |  | Bosch   | Germany | 1     |
|    |  | M6 - M 16 Drilling Set<br>18 pièces  |   |         |       |
| 23 | Hand Grinding Machine   |  | Bosch   | Germany | 1     |
|    |  | 2000w-230mm<br>Input Power: 2,000 W<br>Number of Idle Speeds: 6.600 RPM.<br>Main Handle: Straight Handle<br>Disc Diameter: 230 Mm<br>Weight: 5.3 Kg                    |   |         |       |





| No | Equipment   | Explanation   | Producer  | Orjin   | Piece |
|----|---|---|---|---------|-------|
| 24 | Hand Grinding Machine Small   |   | Bosch   | Germany | 1     |
|    |    | Cutting Machine<br>Rated power input: 720 W No-load speed: 500 rpm Grinding spindle thread: M 14 Main handle Straight Disc diameter: 115 mm Weight 1.9 kg                         |   |         |       |
| 25 | Table Top Grinder   |   | Bosch   | Germany | 1     |
|    |     | Disc diameter : 200 mm<br>Idle speed : 295 rpm<br>Disc widths : 25 mm<br>Disc hub diameter : 32 mm<br>Input power : 220 W   |   |         |       |
| 26 | Battery Charger   |   | Telwin  | Italy   | 1     |
|    |   | Single Phase Mains Voltage : 230 V<br>Mains Frequency 50 / 60 Hz Charge Power : 1 Kw<br>Start Power : 6,4 Kw<br>Charging Voltage : 12 / 24 V<br>Effective Charging Current : 45 A | Rated Charge Curr. : 30 A<br>Start Current 1V/C : 180 A<br>Max Starting Current : 300 A<br>Min. Rated Reference Capacity : 20 Ah Max<br>Rated Reference Capacity : 700 Ah |         |       |
| 27 | Hydraulic & Pneumatic Jack  |   | Gemsa   | Turkey  | 1     |
|    |   | Folding Arm Mobile Jack<br>Lifting Capacity: 40/25 tons<br>Min. Height: 180 mm<br>Mak. Height: 273 mm<br>Lifting Distance: 40 / 85-25 / 80 mm<br>Weight: 58 kg                    |   |         |       |
| 28 | Scissor Platform  |   | star  | Turkey  | 1     |
|    |  | Capacity: 500 Kg<br>Wheel Diameter: 127 mm<br>Total Length: 925mm<br>Total Height: 970 mm<br>Lift Height: 560 mm<br>Weight: 87 Kg   | min. Table Height: 340 mm<br>Max. Table Height: 900 mm<br>Table Dimensions: 855 x 500 x 50 mm<br>Max.For Height,Pedal Presses: 45 mm                                      |         |       |
| 29 | Jack Stand  |   | Atek  | Turkey  | 1     |
|    |  | Capacity: 6 / 12 Ton.<br>Lifting Height: 450 / 600 mm.  |   |         |       |

| No | Equipment   | Explanation  | Producer  | Orjin   | Piece |
|----|---|--|---|---------|-------|
| 30 | Workshop Hydraulic Jack   |  | Atek  | Turkey  | 1     |
|    |    | Capacity: 2 tons<br>System: Manual Hydraulic Pump<br>Model: Folding<br>Dimensions: 2.000x2.000x2.800 mm<br>Weight: 200 kg.   |   |         |       |
| 31 | Fixed Iron Cutting  |  | Bosch   | Germany | 1     |
|    |    | Metal Cut-Off Saw<br>GCD 12 JL Professional 1 X Circular<br>saw blade Expert for steel,<br>305 x 25.4 x 2.6 mm, 60<br>Voltage 240 V  |   |         |       |
| 32 | Hydraulic Press   |  | Atek  | Turkey  | 1     |
|    |   | Capacity 25 ton<br>220 V Electric Motor<br>Oil Pressure Gauge<br>Pressure Adjustment / User Manual<br>Stroke: 170 mm<br>A: 1780 mm   | B: 750 mm<br>C: 750 mm<br>D: 490 mm<br>E: 200 mm<br>H: 700 mm                       |         |       |
| 33 | Chain Crane   |  | Atlas   | Kore    | 1     |
|    |  | Capacity 1.000 Kg.<br>Chain 5 mt.  |   |         |       |
| 34 | Clamp   |  | izeltaş   | Turkey  | 1     |
|    |   | Size : 150 mm<br>Jaw Width : 150 mm<br>Total Lenght : 420 mm<br>Arvil Size : 70x100 mm<br>Vice Heaighy : 170 mm  |   |         |       |
| 35 | Auto Creeper  |  | izeltaş   | Turkey  | 1     |
|    |   | 91cm long, heavy duty plastic sled<br>Six non-destructive, oil resistant, wide<br>wheels for easy maneuverability<br>Oil-resistant padded headrest for<br>comfortable handling | Integrated toolboxes on both sides of the<br>blade for easy access<br>910x430x110mm |         |       |



| No | Equipment   | Explanation   | Producer | Orjin  | Piece |
|----|---|---|----------|--------|-------|
| 36 | Lighting  |   | EAT      | Turkey | 6     |
|    |     | Body : Polycarbonate RAL 9003 body ,<br>Metal lock clip Diffuser: Polycarbonate opal cover<br>Light Source: Mid Power LED<br>Power: 28 W / 38 W / 55 W<br>Input Voltage: 220-240V - IP 65 |          |        |       |
| 37 | Control panel of all equipment.   |   | Alura    | Turkey | 1     |
|    |     | Generator / Mains power connection.   |          |        |       |
| 38 | Fire extinguisher   |   | Alura    | Turkey | 2     |
|    |   | Capacity: 6 kg.<br>Full Weight: 9.1 kg.<br>Working Pressure: 18 bar. Discharge Time: 14 sec. Extinguishing Agent: MAP@ (ABC)"   |          |        |       |
| 39 | Fire extinguisher   |   | Osaka    | Japan  | 1     |
|    |   | Air Inlet: 1/2 inch<br>Filter : 20U<br>Working Pressure : 05-9.9<br>Atu Working temperature : 5-60 ° C<br>Water Capacity : 80 MI<br>Air Permeability : 2200Lt / Dk                        |          |        |       |
| 40 | Compressed air line installation.   |   | Airfleks | Turkey | 1     |
|    |  | Polyurethane Pneumatic fittings   |          |        |       |
| 41 | Compressed air line installation.   |   | Airfleks | Turkey | 1     |
|    |  | Polyurethane Pneumatic hose 10 mm."   |          |        |       |

| No | Equipment   | Explanation   | Producer | Orjin  | Piece |
|----|---|---|----------|--------|-------|
| 42 | Hand Tools Set  |   | İzeltaş  | Turkey | 1     |
|    |   | Mechanical Tool Kit<br>43 Pieces  |          |        |       |
| 43 | 209 Piece Tool Set  |   | İzeltaş  | Turkey | 1     |
|    |  | Metal material drawer: 5 pcs<br>With EVA sponge inside the drawer<br>lockable<br>Top is plastic<br>portable on wheels<br>Pulls full of hand tools 209 Piece |          |        |       |