
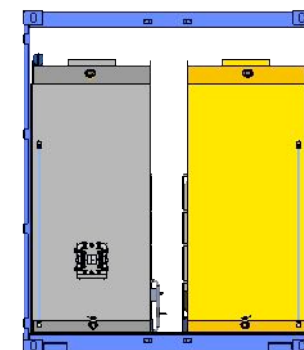
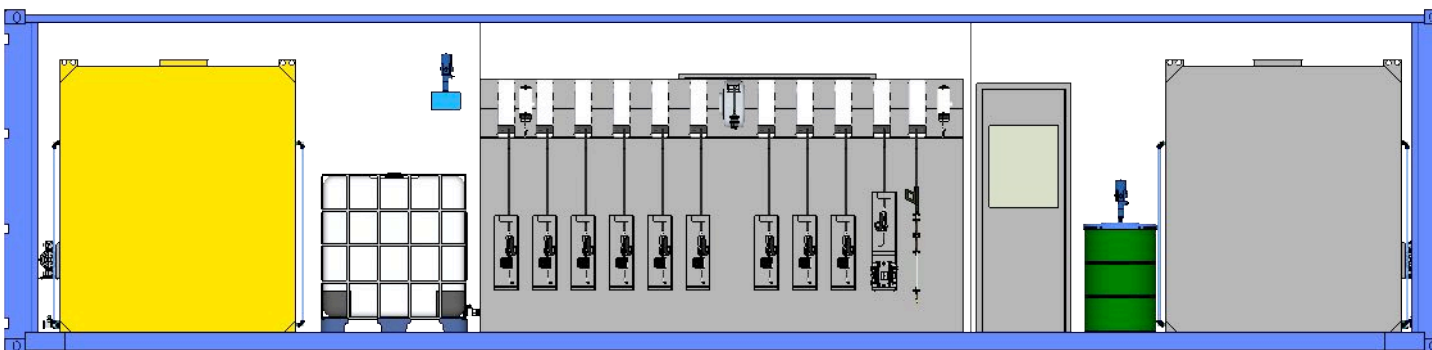
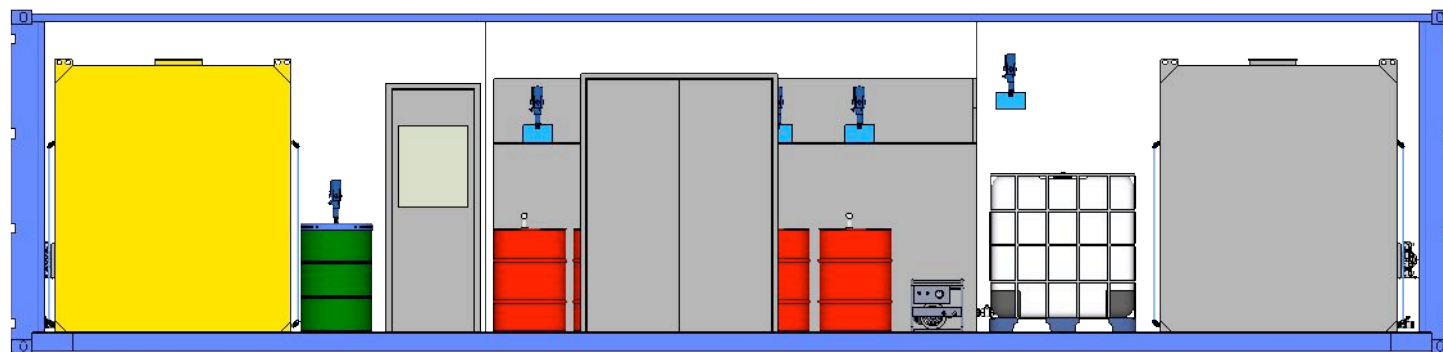


Project / Model  
**23.009**  
**40' Lubrication Service Container**

Explanation  
40' HQ ISO Container

Info  
Date : 07.08.2021  
Rev. : 03 / 30.08.2021  
Per. : Metin ALCAR  
Tel : 0544 242 04 91  
Mail : sales@aluratrailer.com

**A 01**

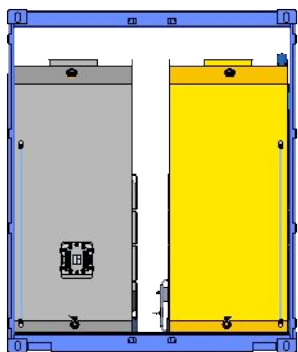

Project / Model  
**23.009**  
**40' Lubrication Service Container**


Explanation


...

Info

Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 02**

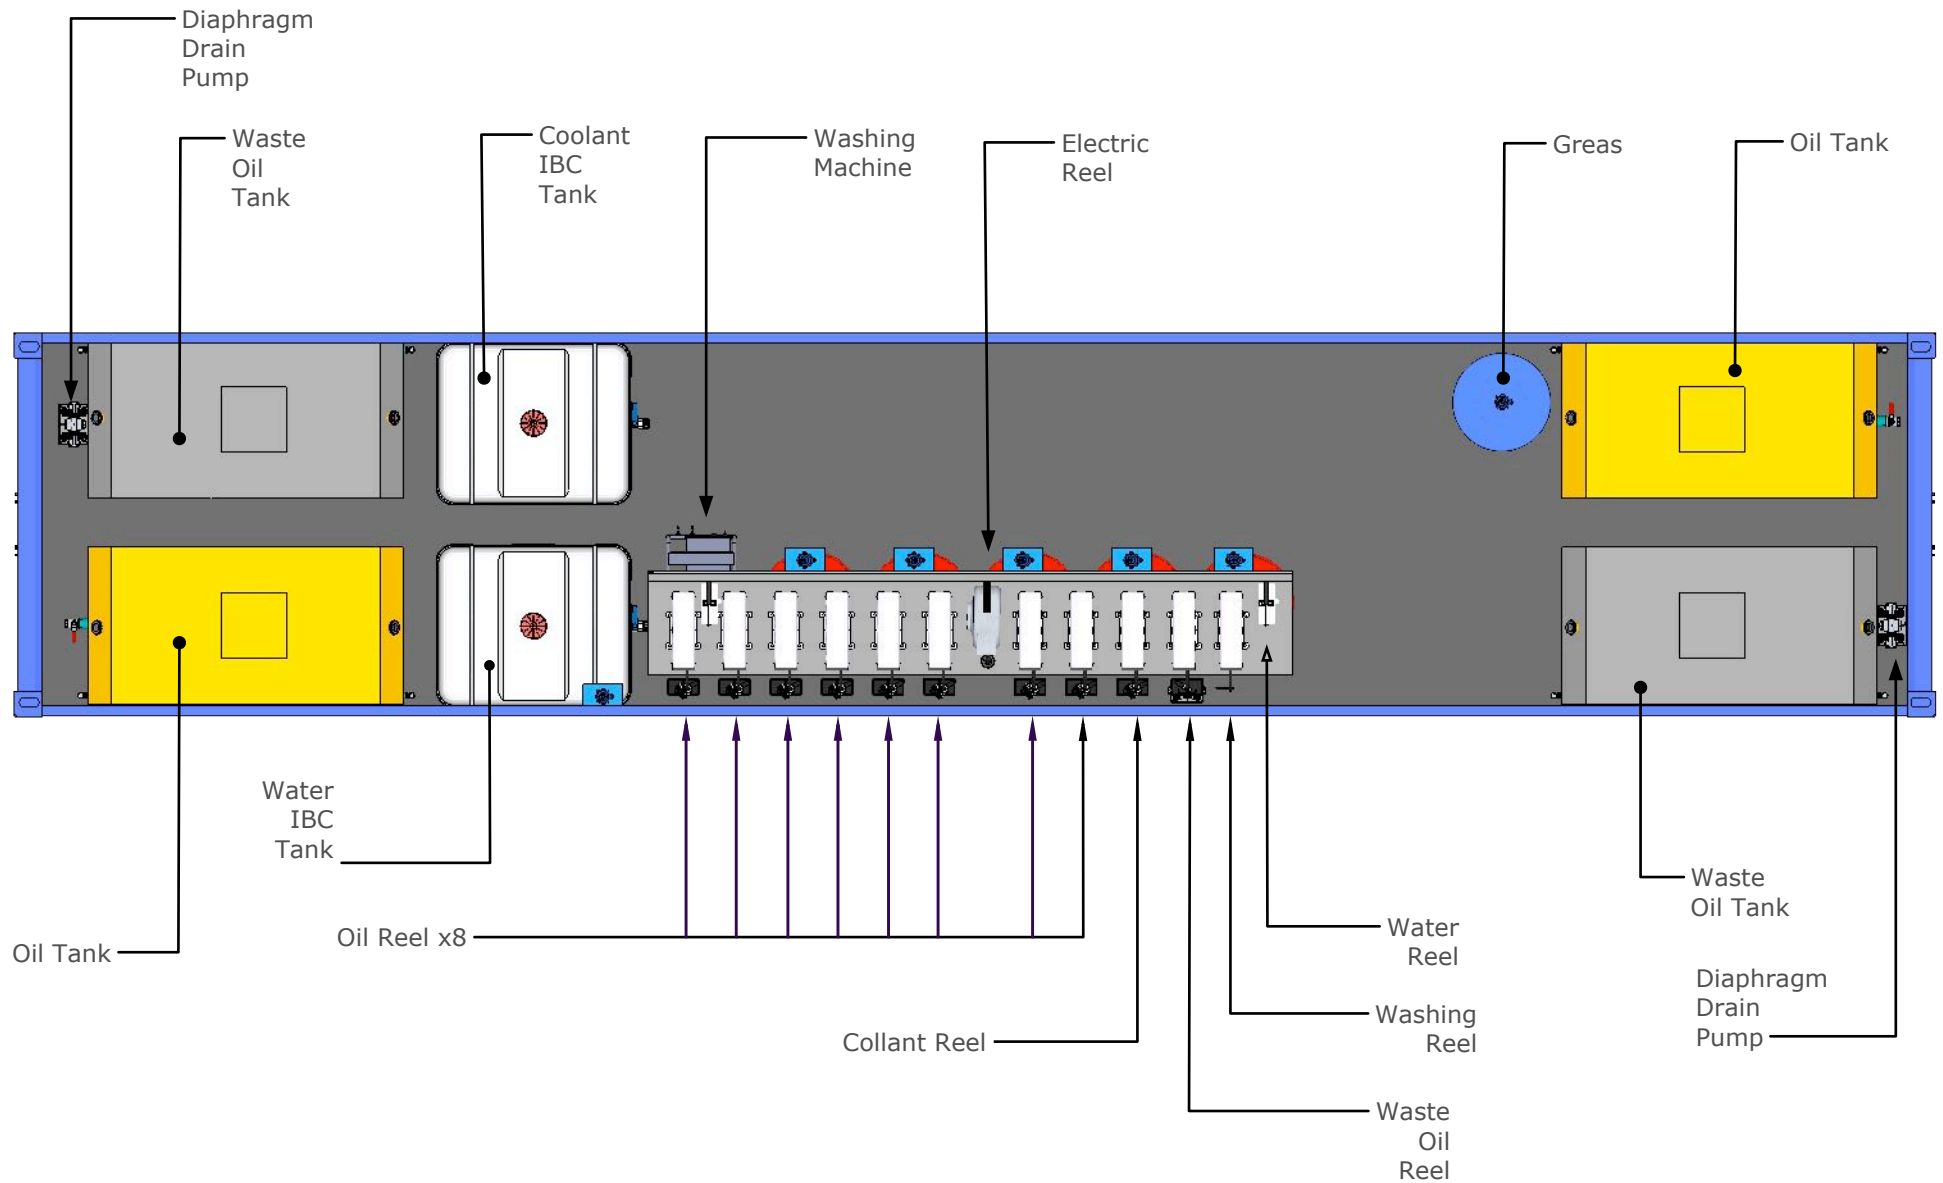

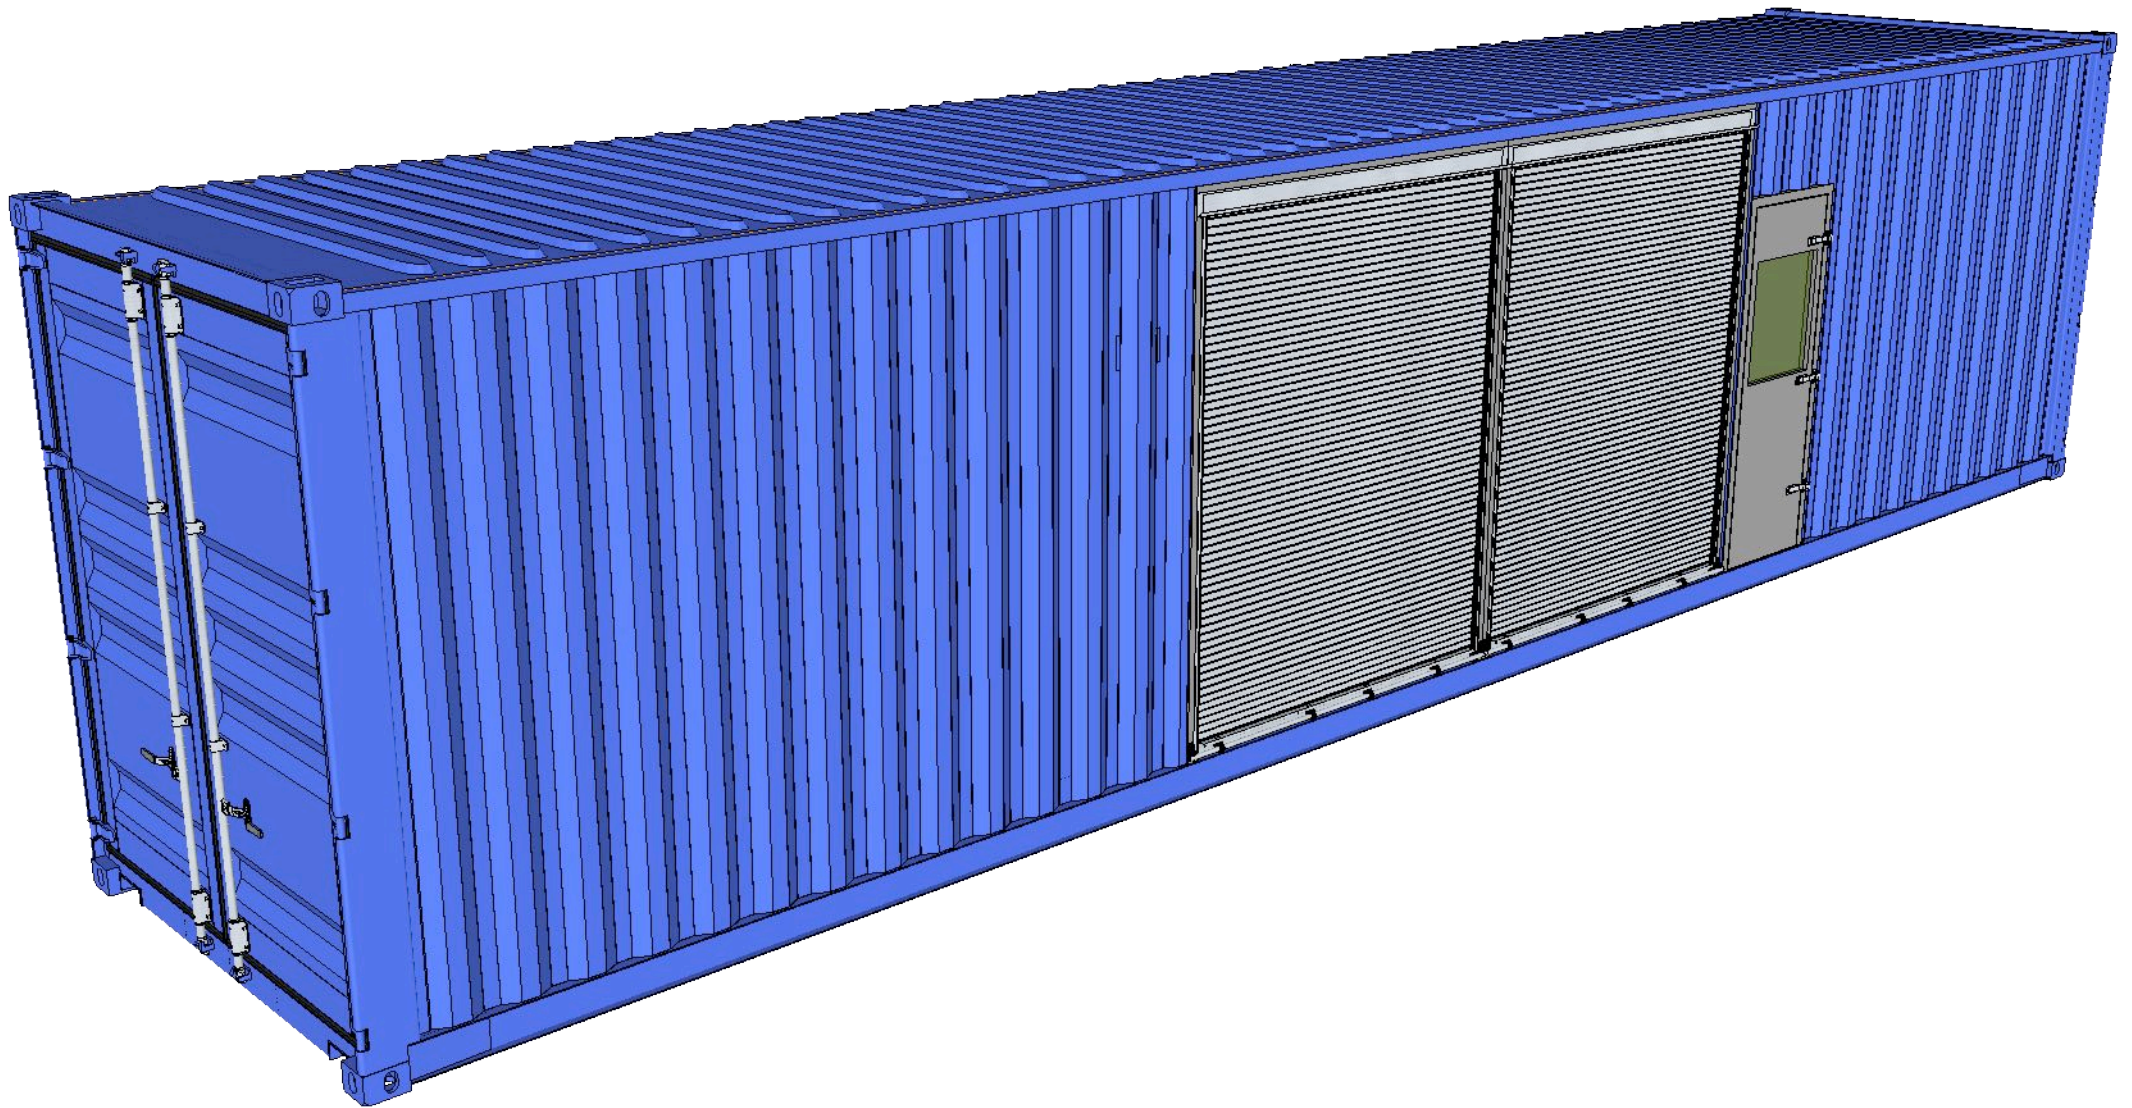

Project / Model

**23.009**  
**40' Lubrication Service  
Container**


Explanation

...

Info

Date : 07.08.2021  
Rev. : 03 / 30.08.2021  
Per. : Metin ALCAR  
Tel : 0544 242 04 91  
Mail : sales@aluratrailer.com

**A 04**

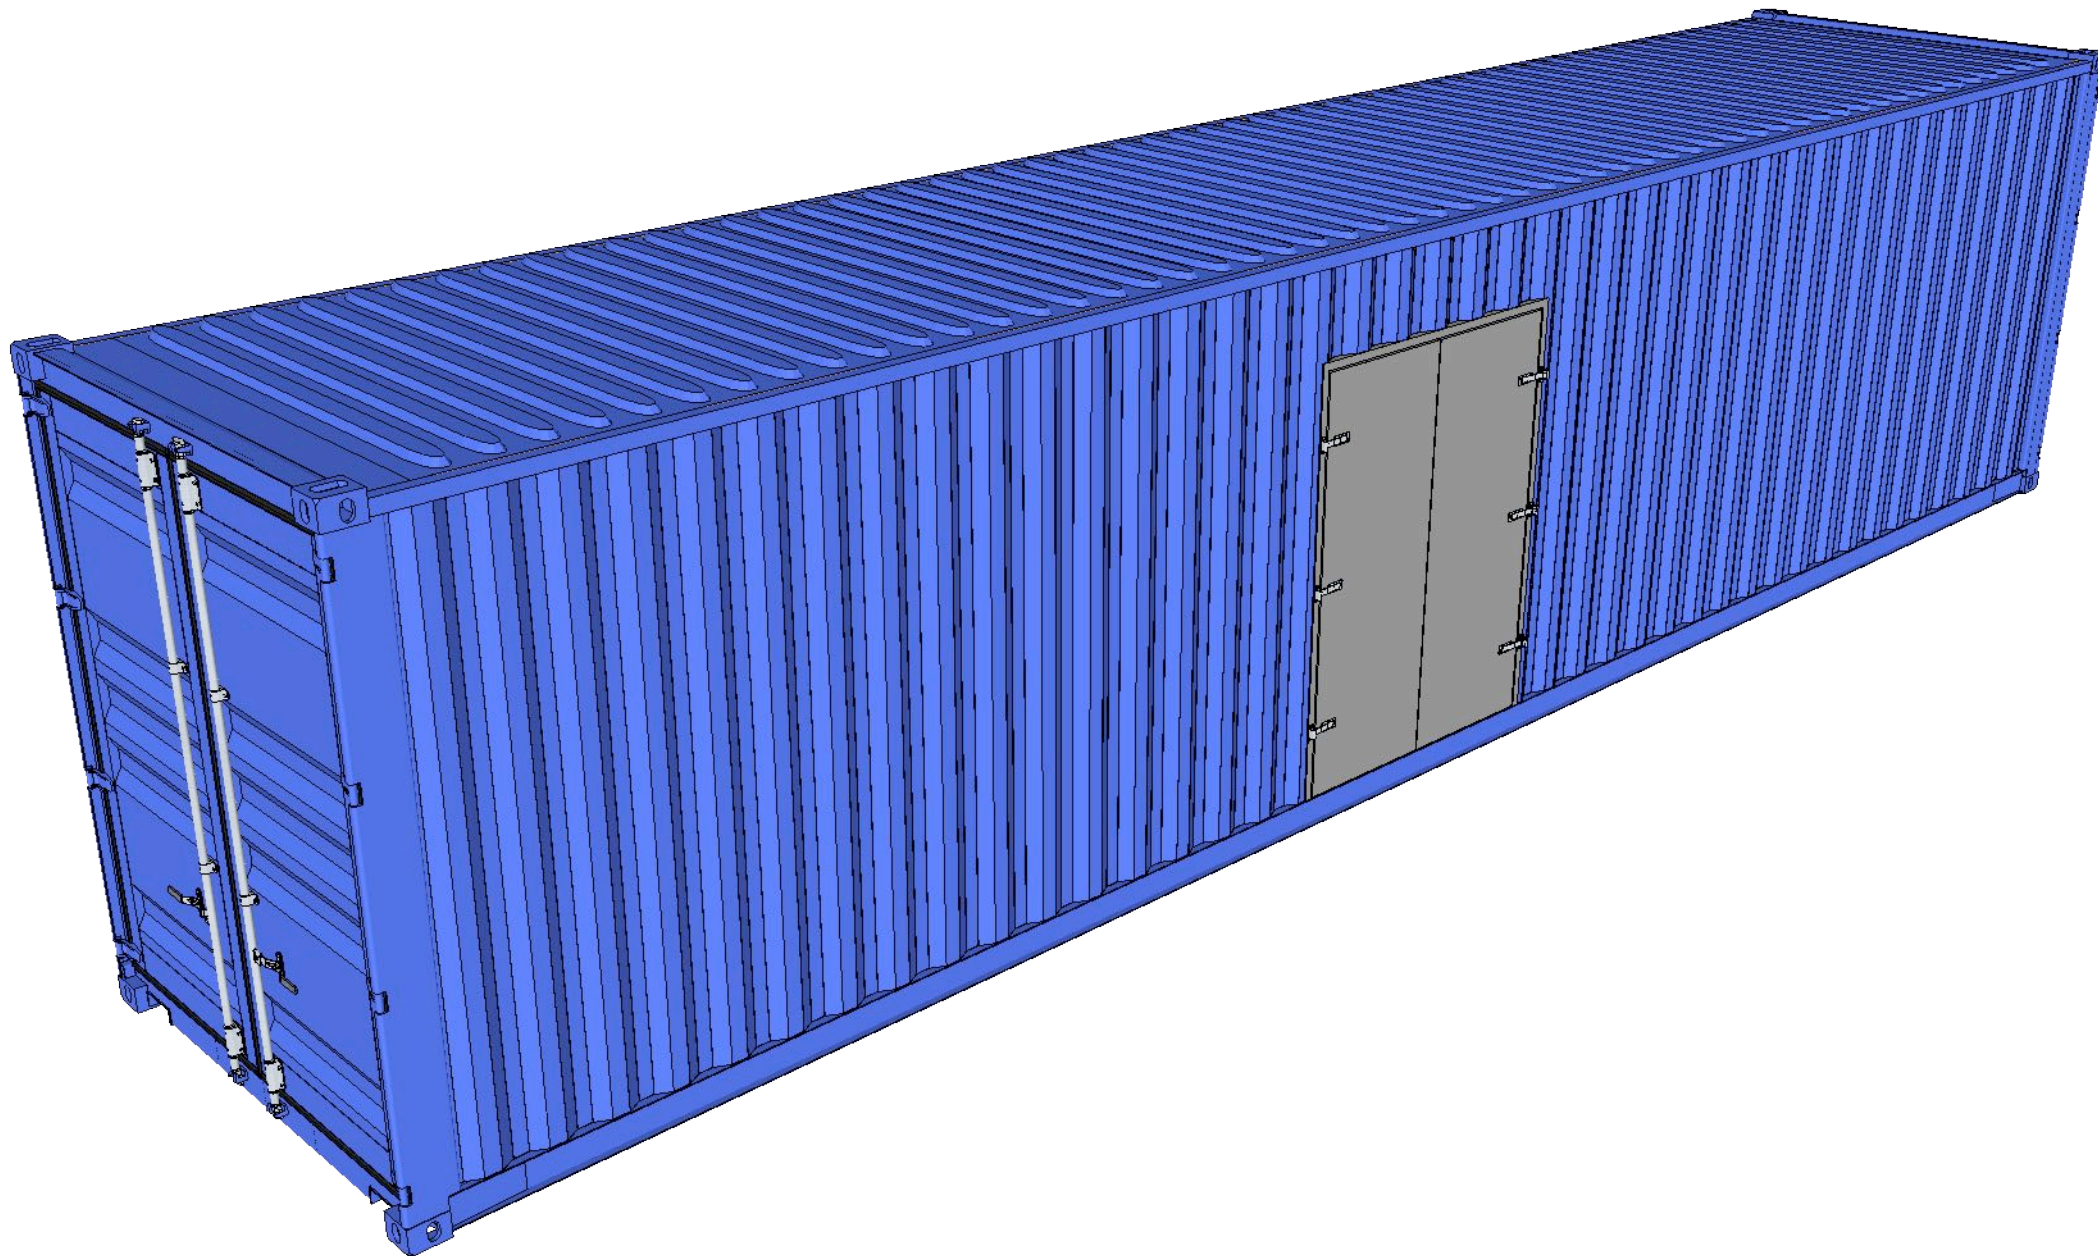

Project / Model

**23.009**  
**40' Lubrication Service Container**


Explanation

...

Info

Date : 07.08.2021  
Rev. : 03 / 30.08.2021  
Per. : Metin ALCAR  
Tel : 0544 242 04 91  
Mail : sales@aluratrailer.com

**A 05**

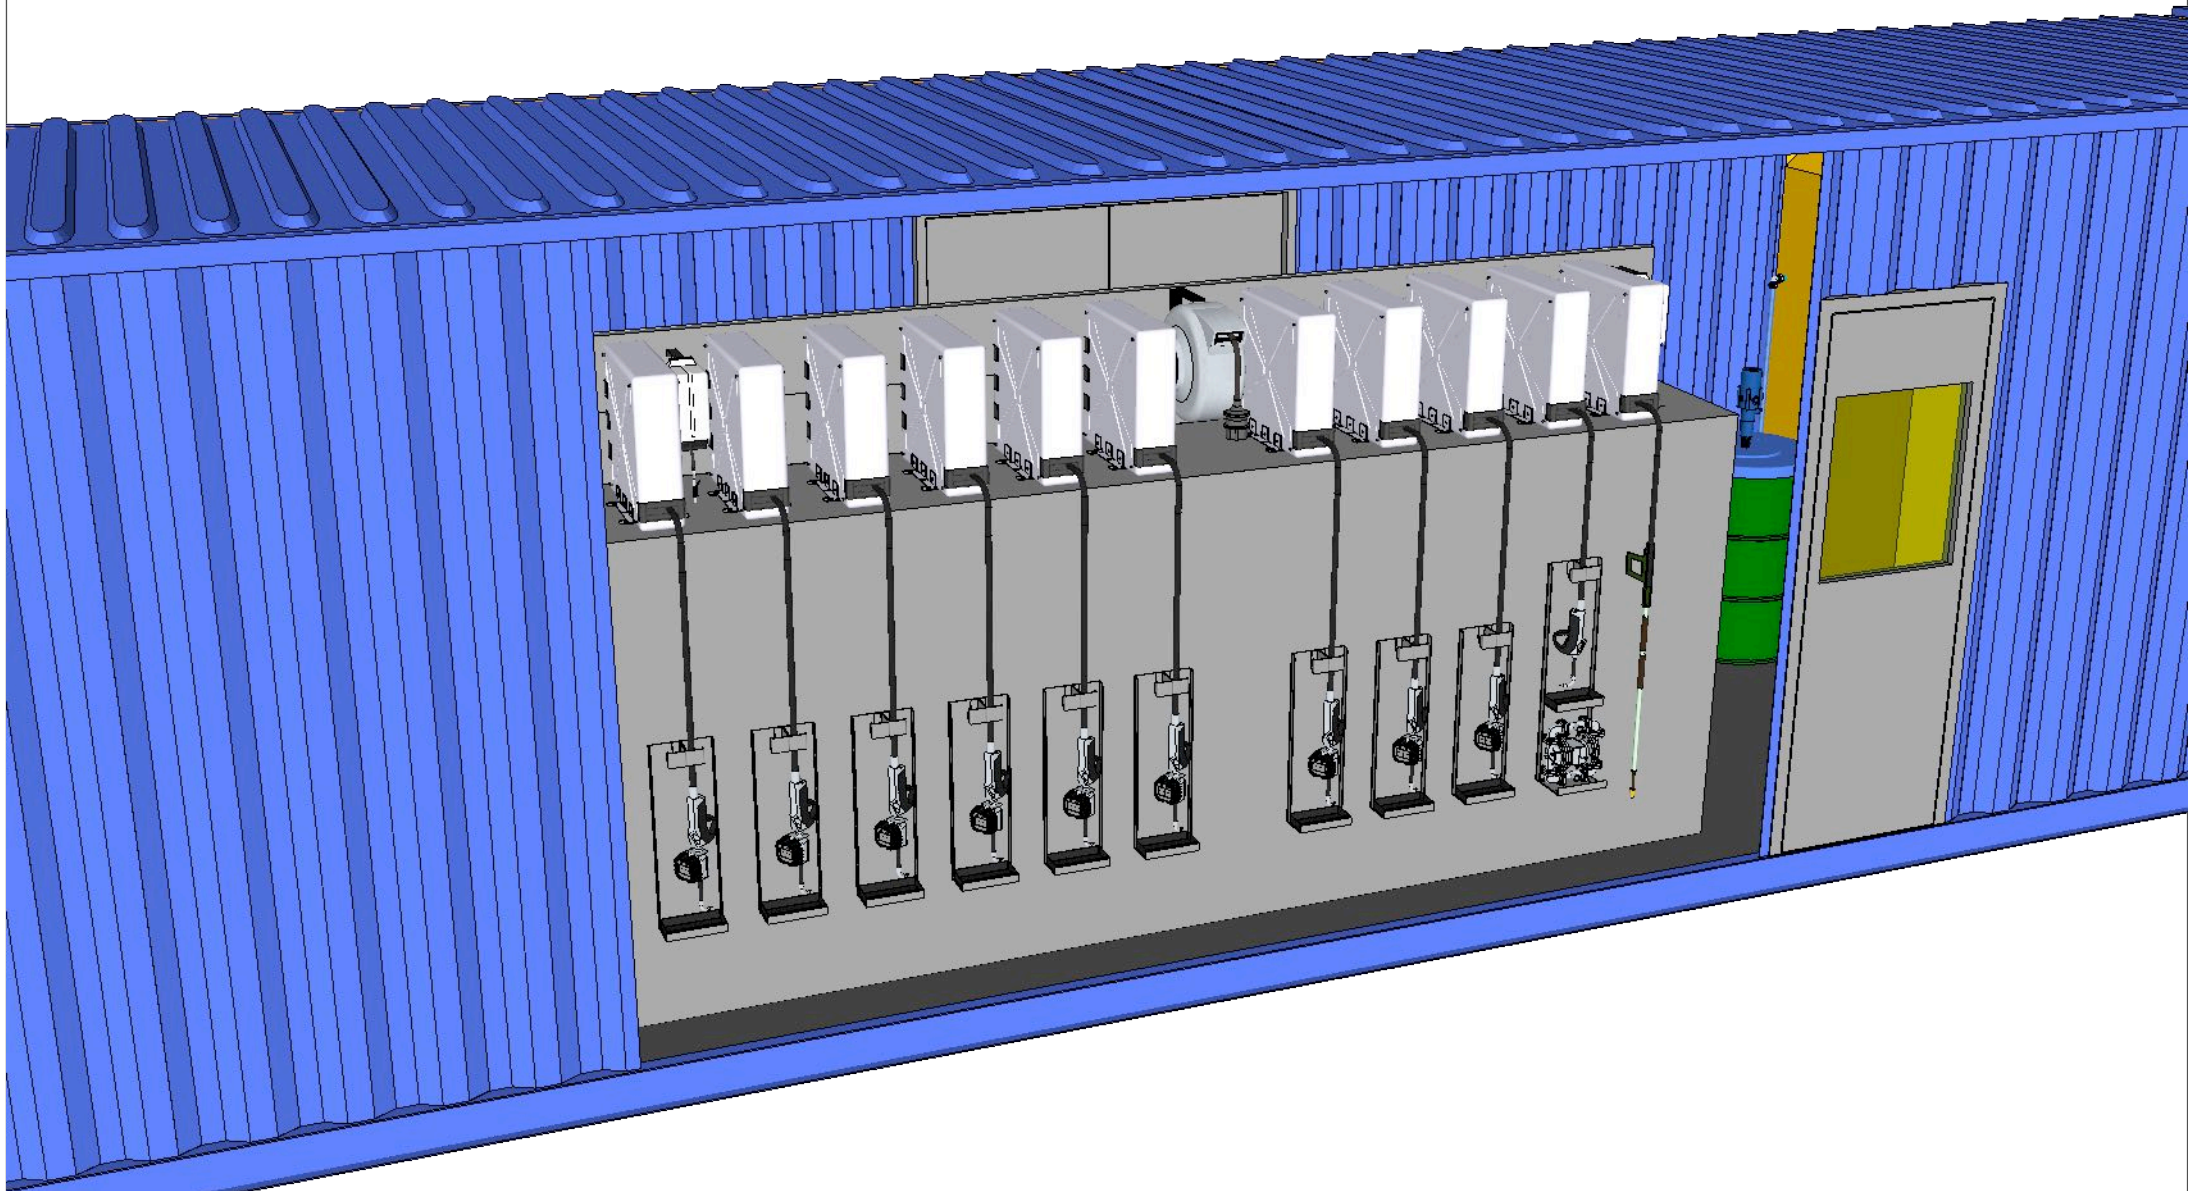


Project / Model  
**23.009**  
**40' Lubrication Service Container**

Explanation  
 ...

Info  
 Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 06**

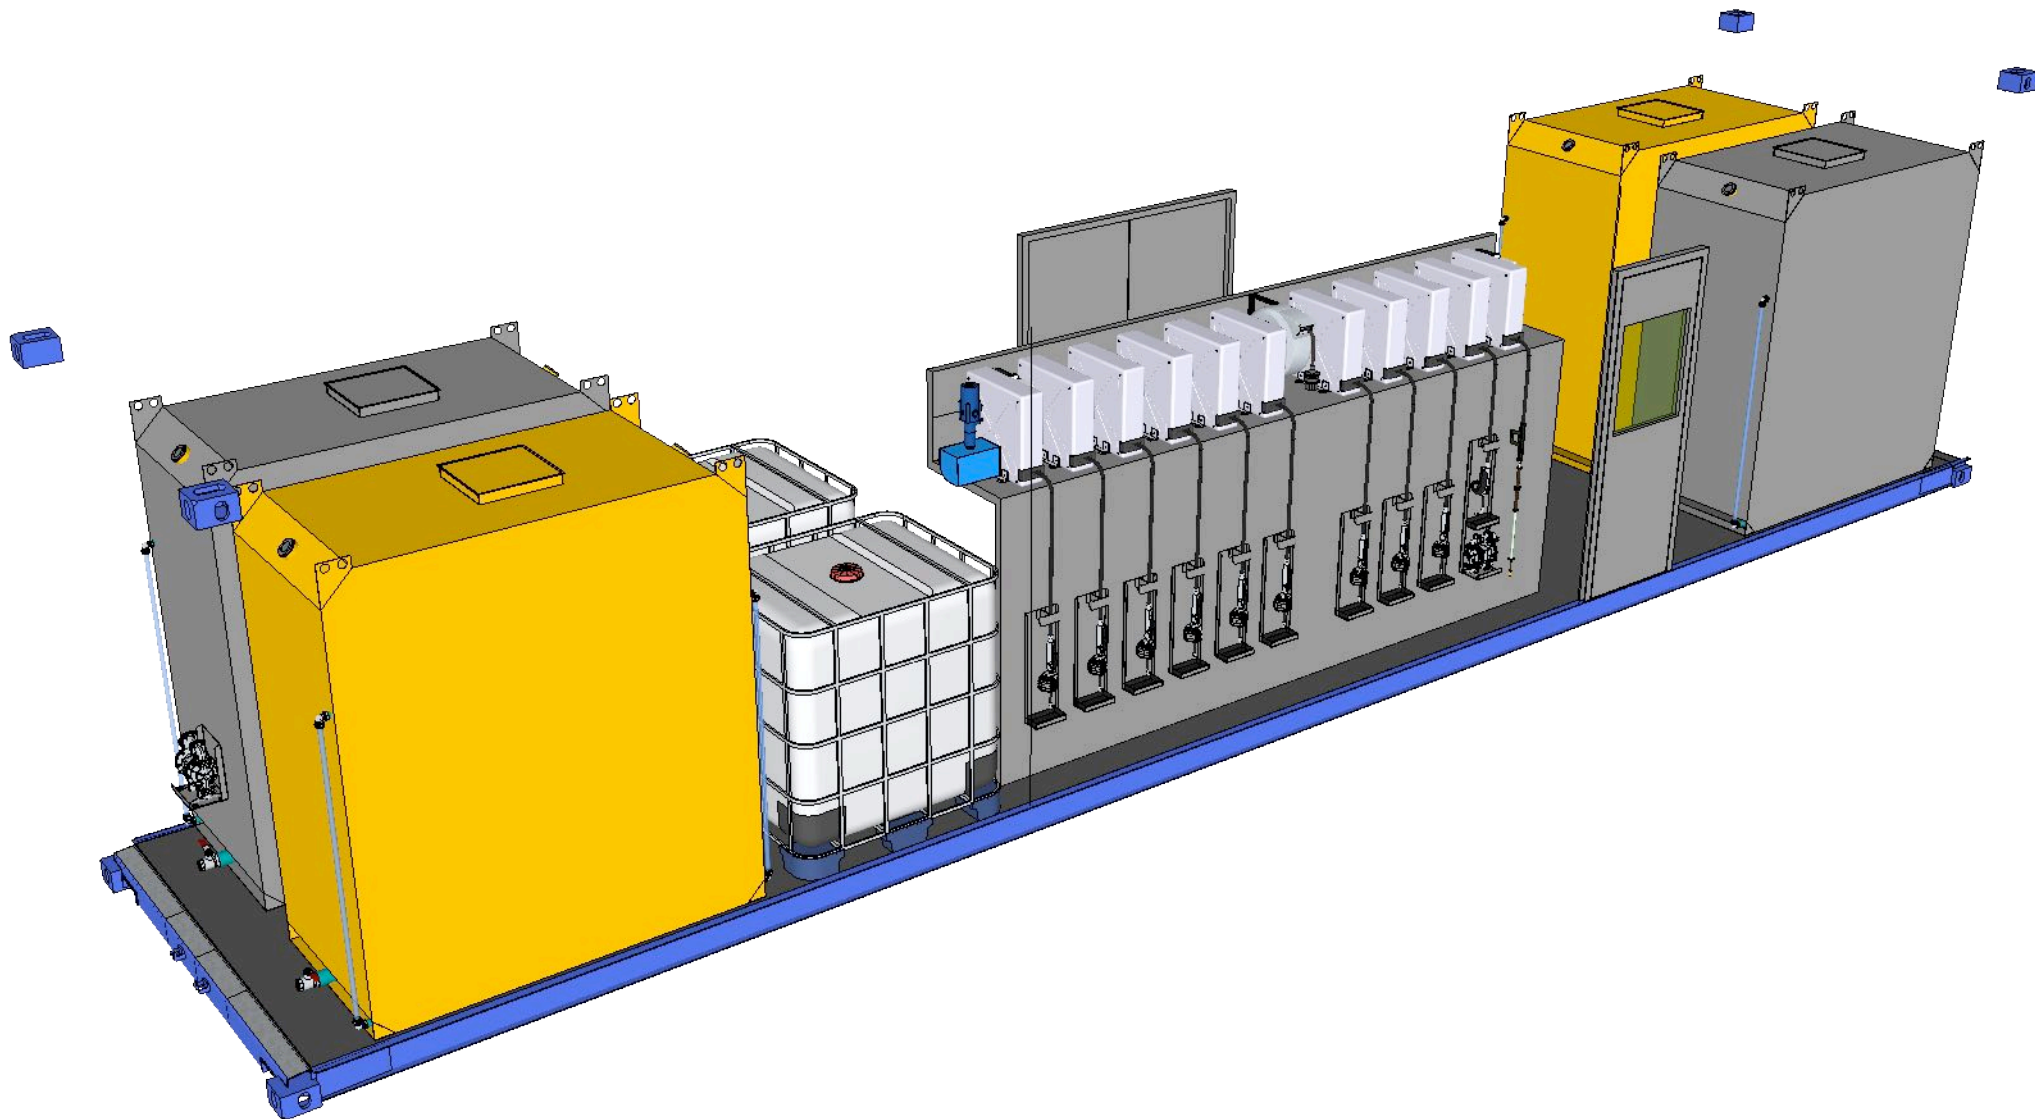

Project / Model  
**23.009**  
**40' Lubrication Service Container**


Explanation

...

Info

Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 07**

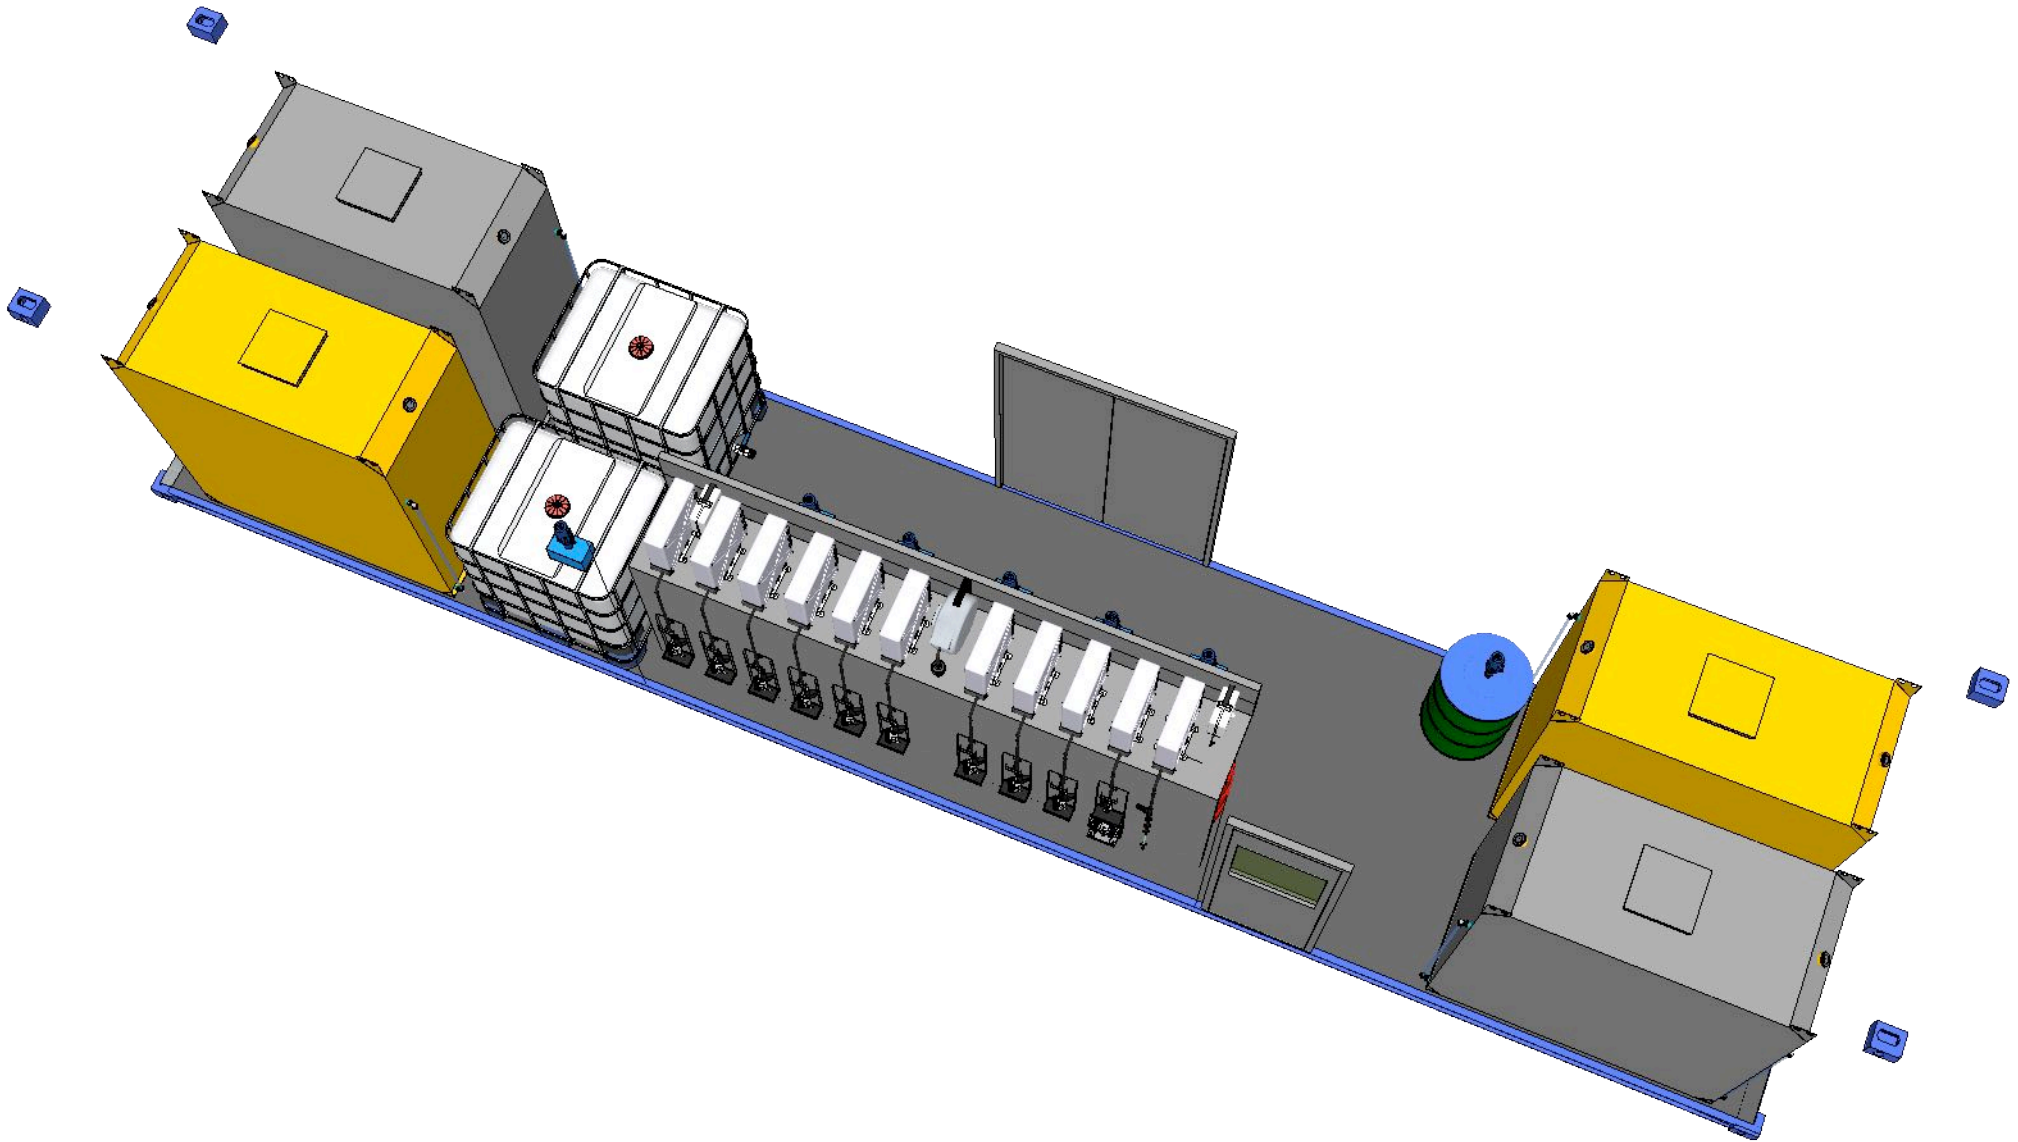


Project / Model  
**23.009**  
**40' Lubrication Service Container**

Explanation  
 ...

Info  
 Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 08**



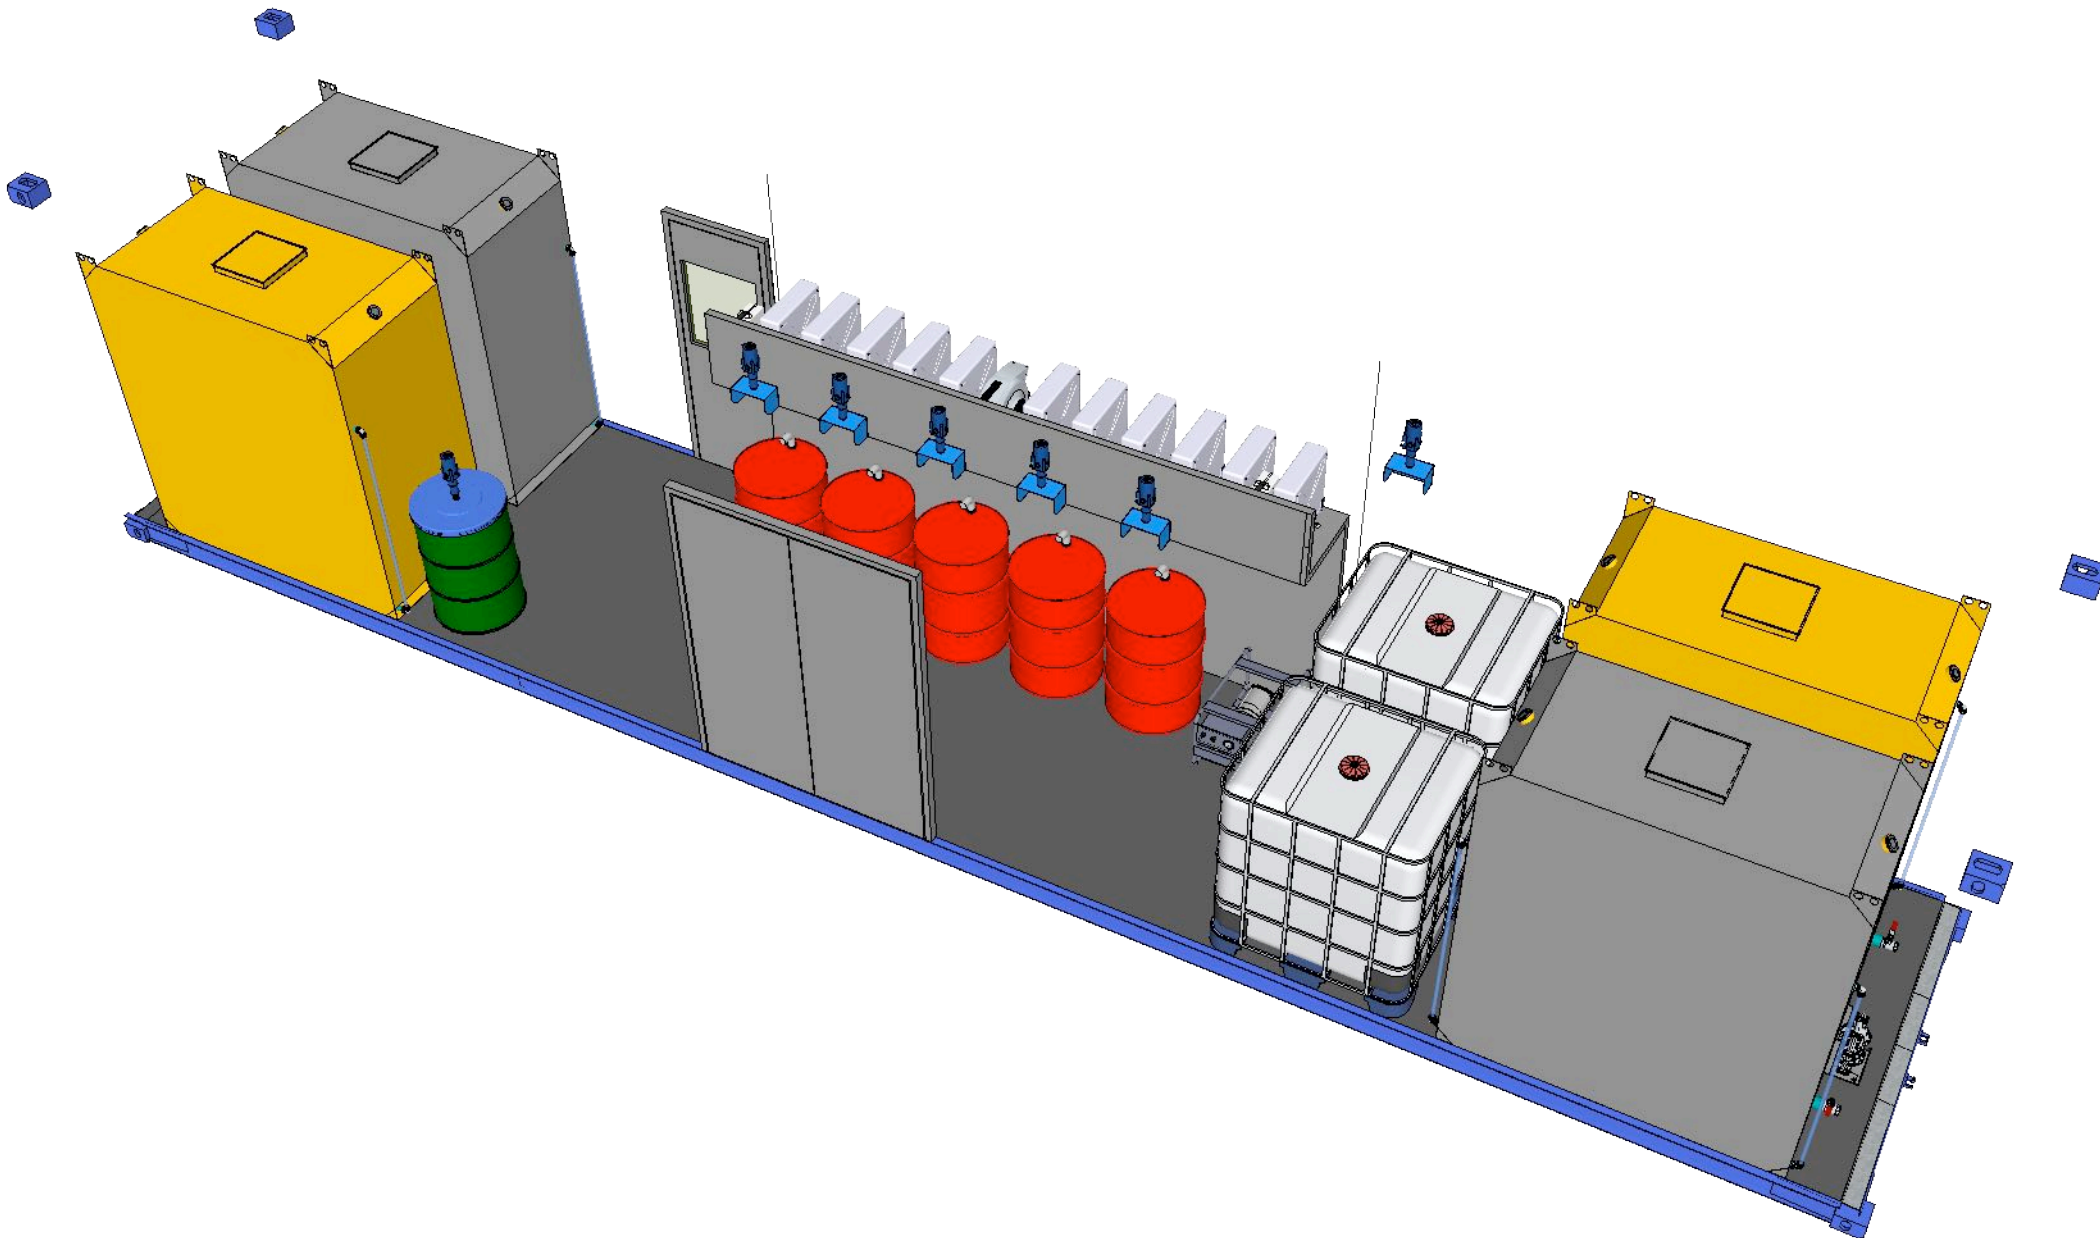


Project / Model  
**23.009**  
**40' Lubrication Service Container**

Explanation  
 ...

Info  
 Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 09**

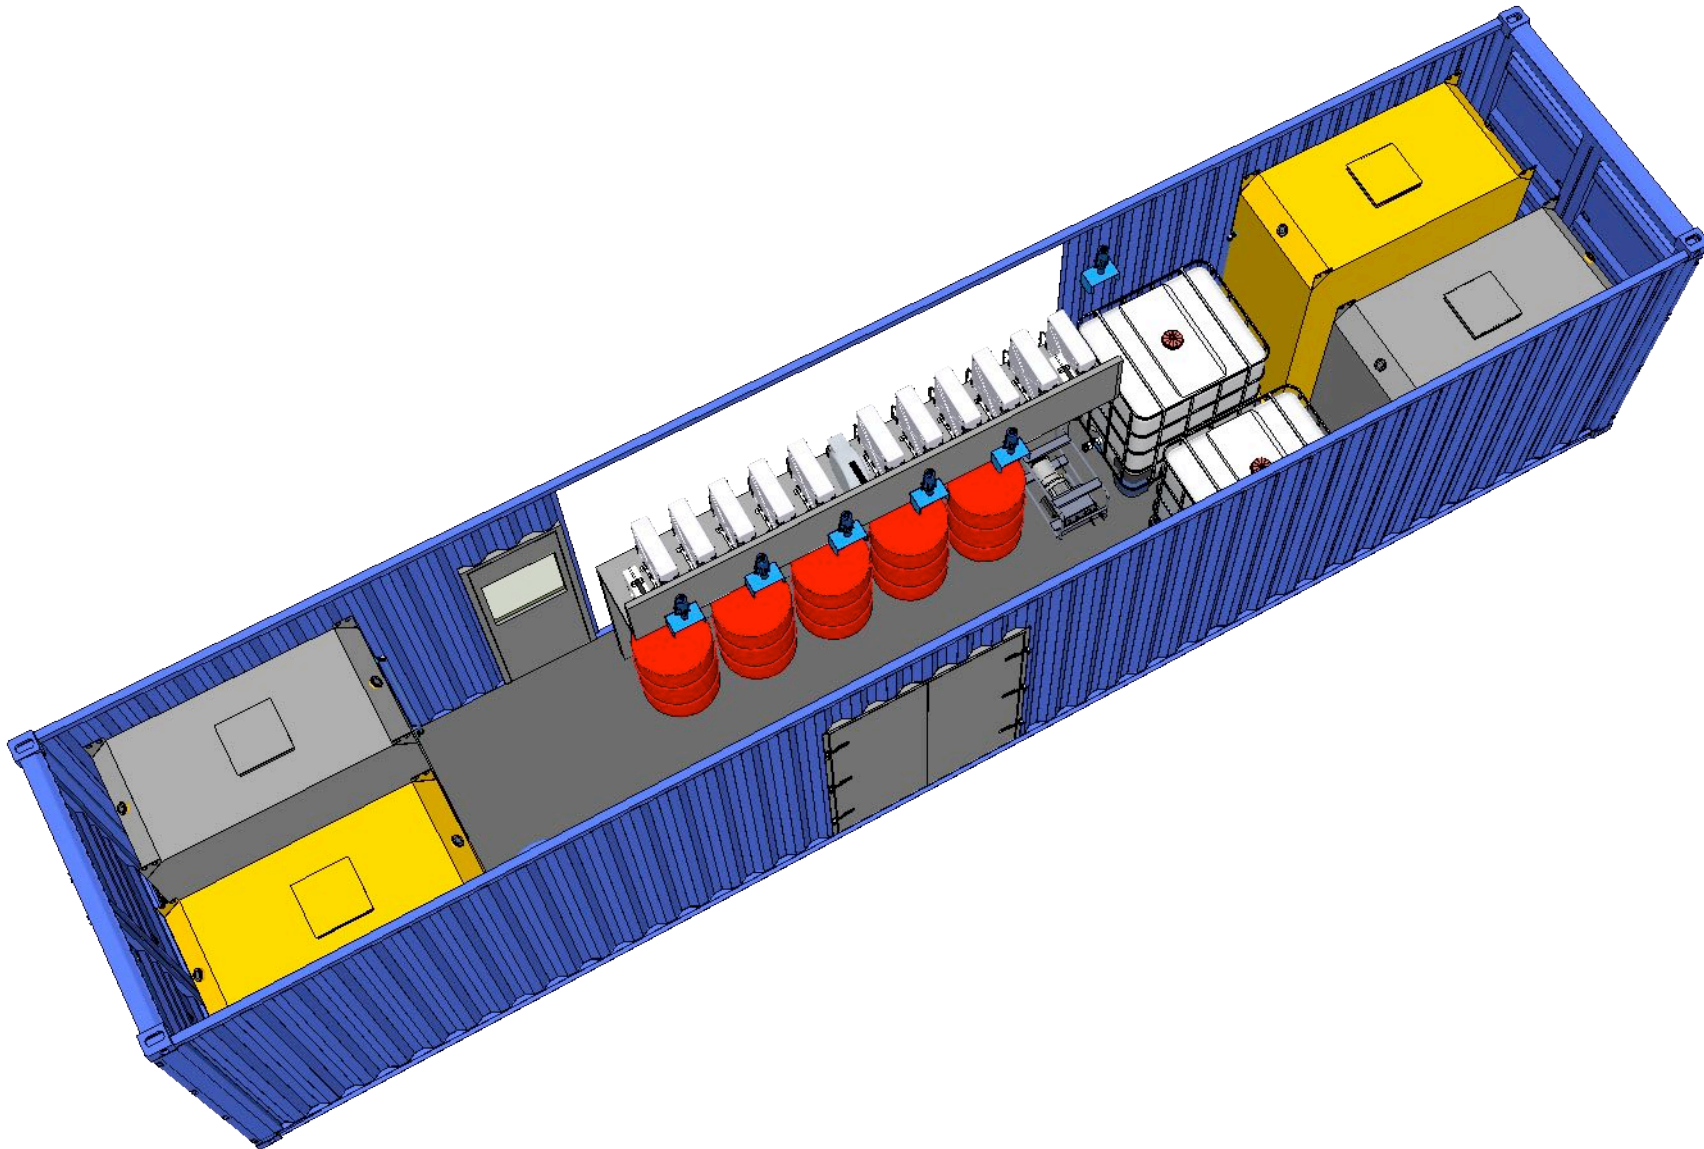


Project / Model  
**23.009**  
**40' Lubrication Service Container**

Explanation  
 ...

Info  
 Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 10**

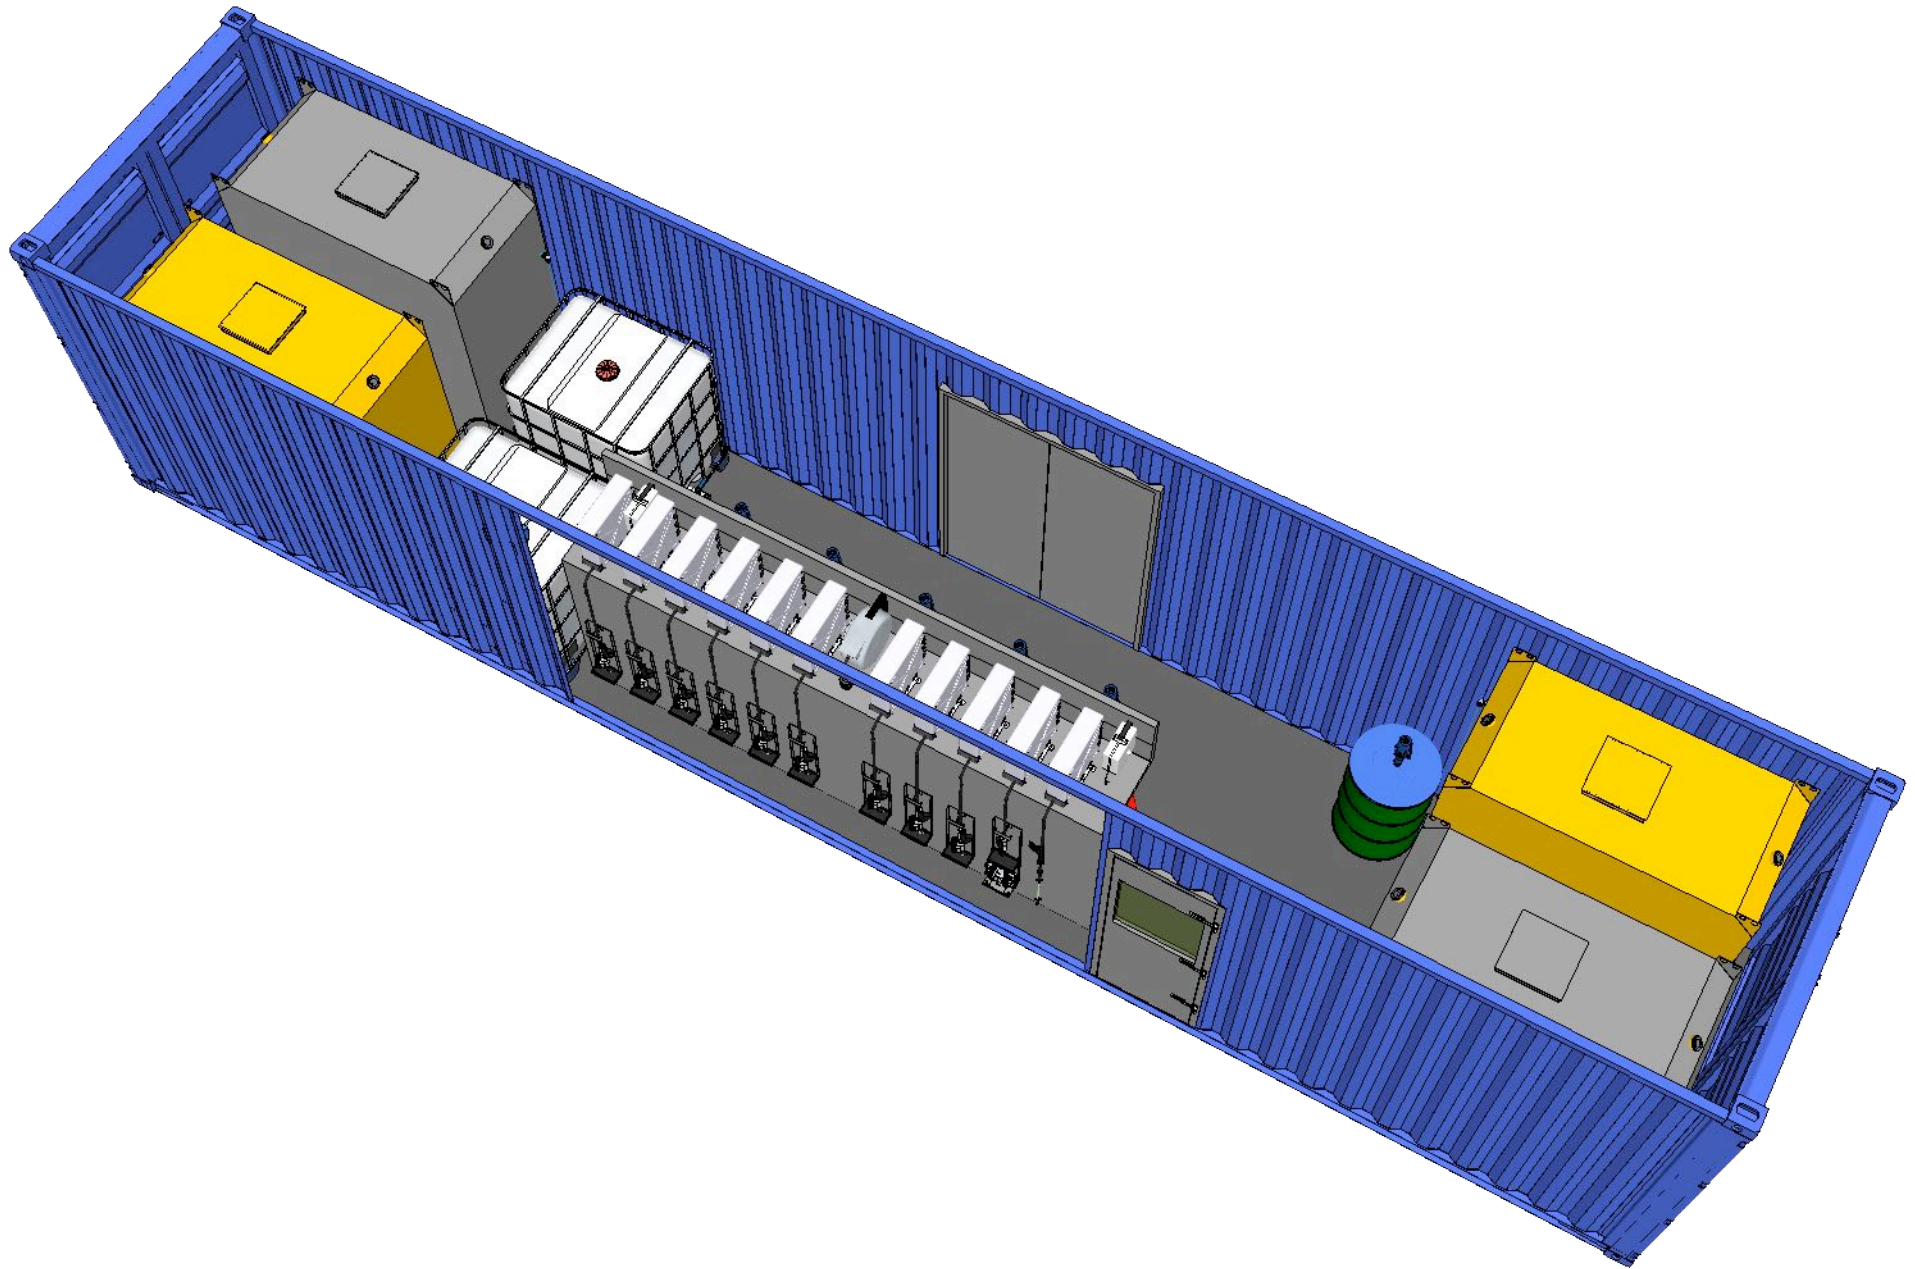


Project / Model  
**23.009**  
**40' Lubrication Service Container**

Explanation  
 ...

Info  
 Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 11**

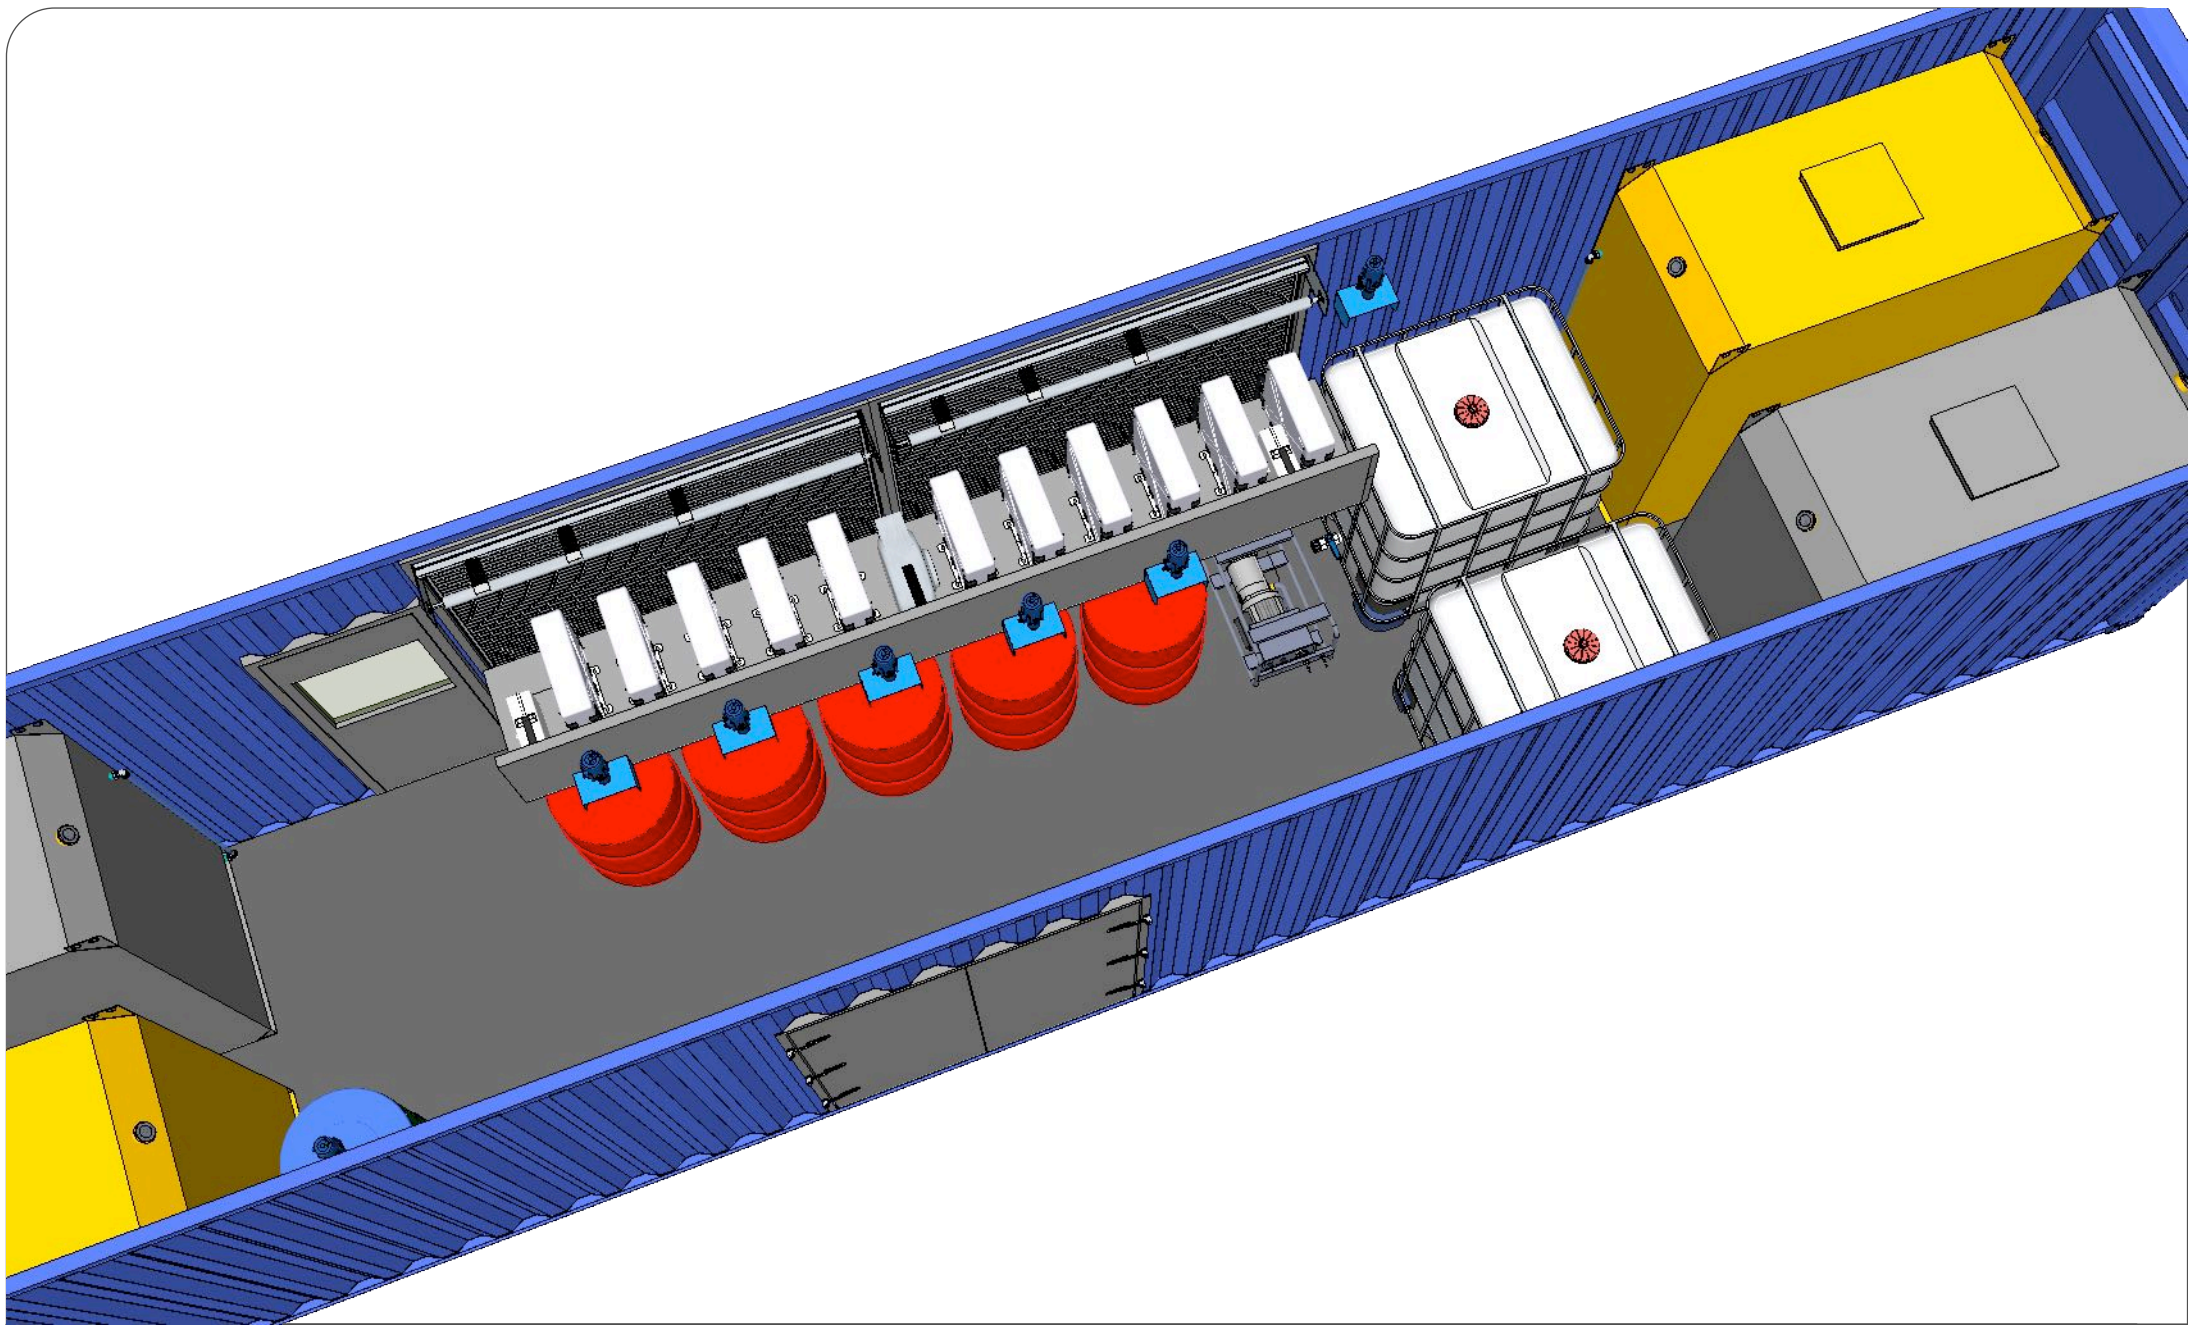


Project / Model  
**23.009**  
**40' Lubrication Service Container**

Explanation  
 ...

Info  
 Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com

**A 12**

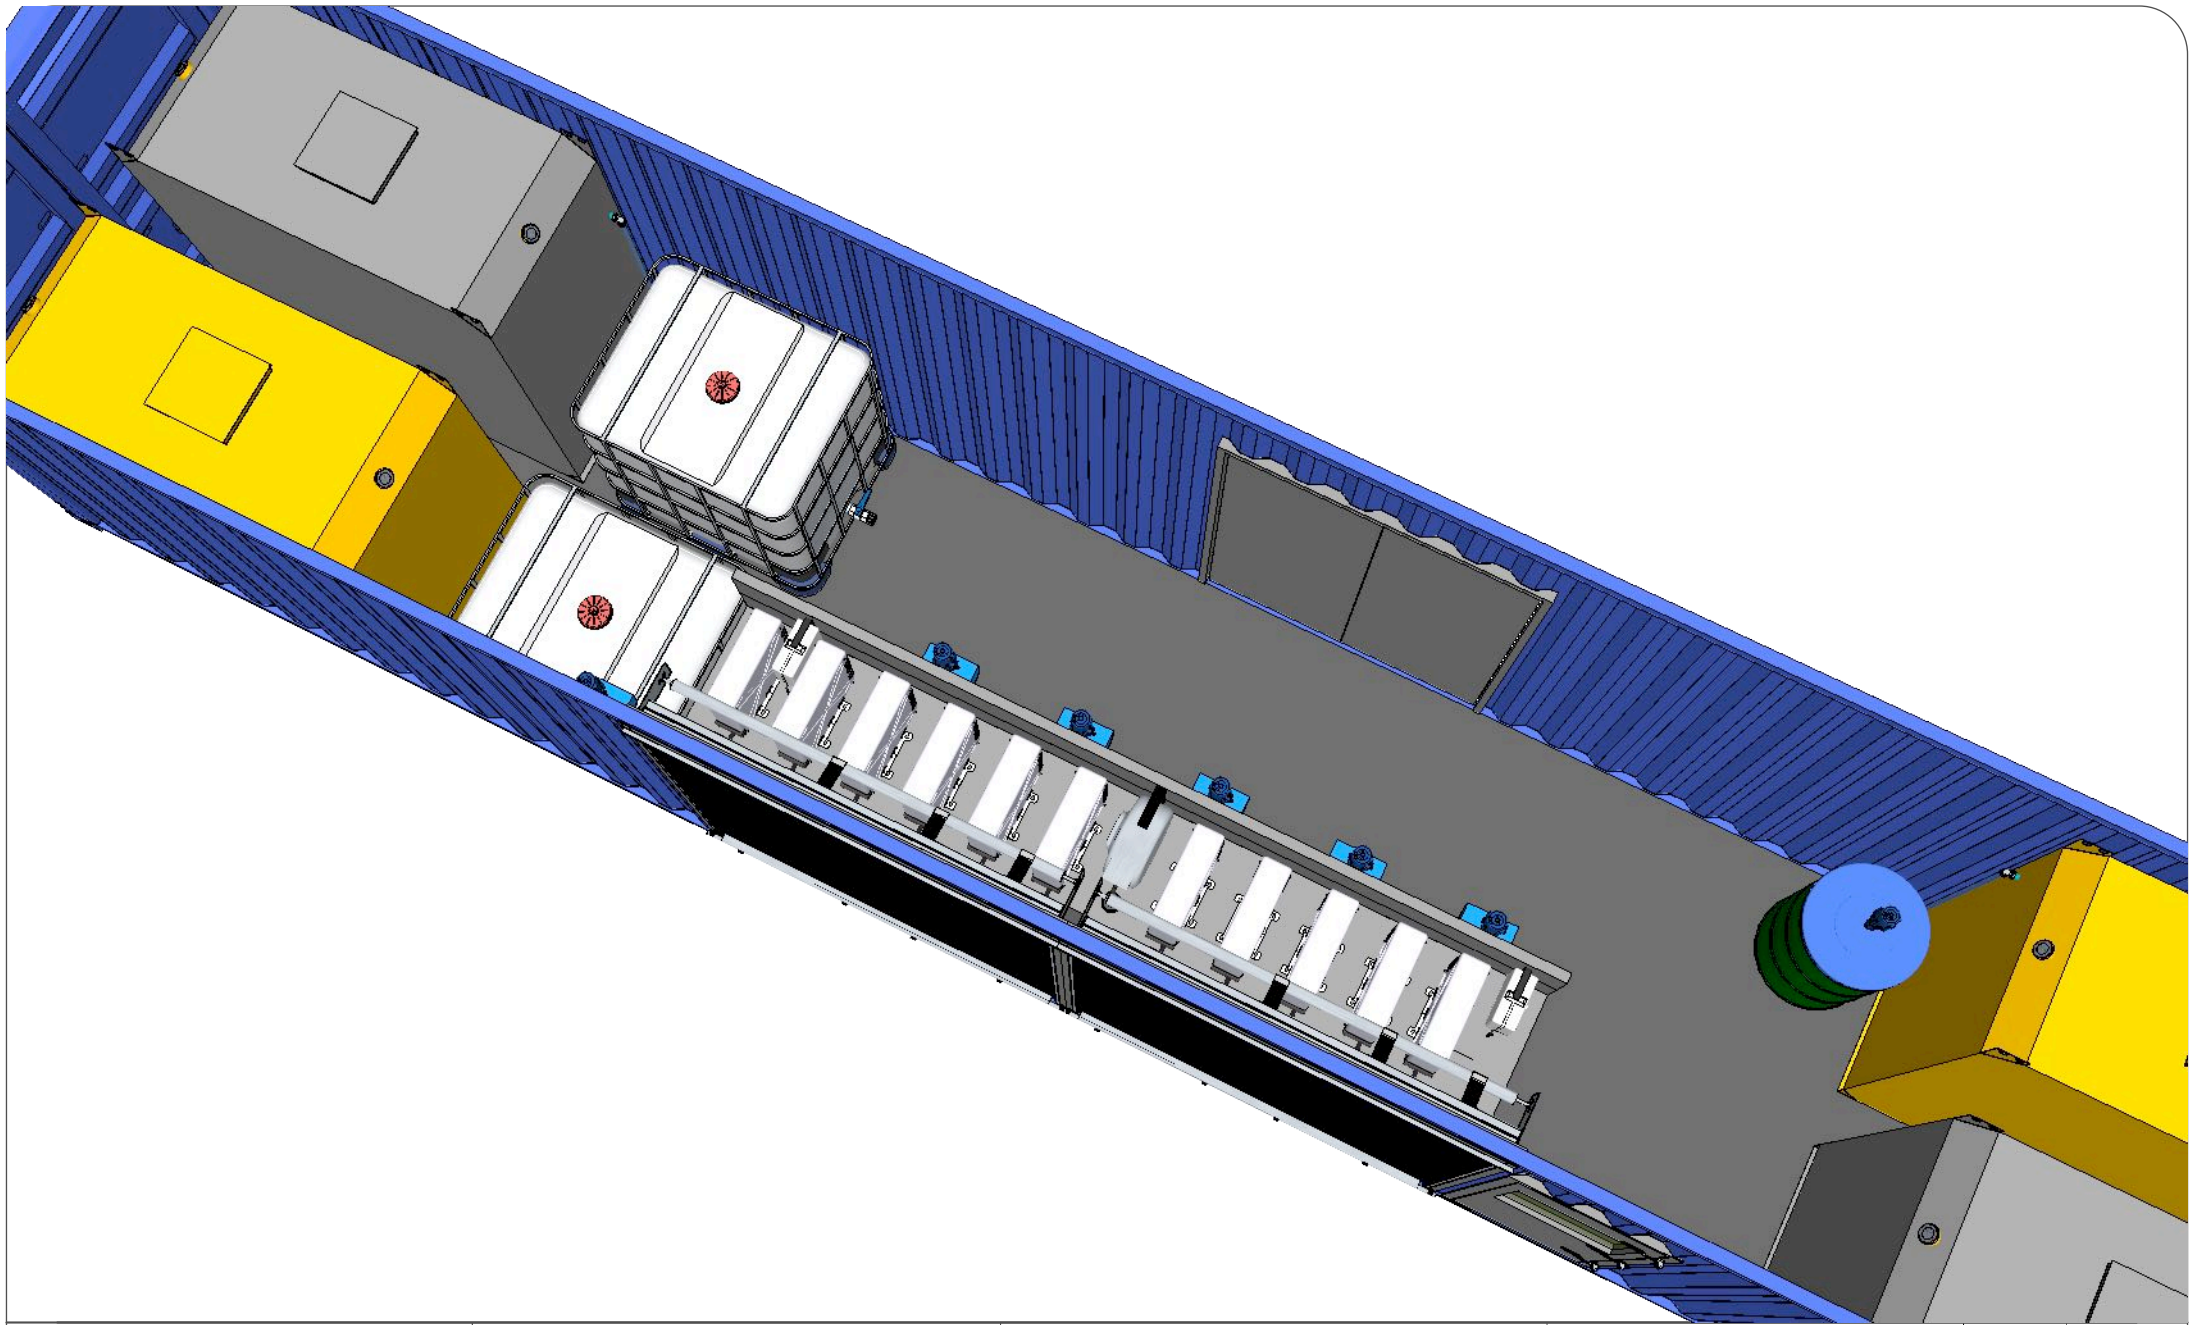







Project / Model  
**23.009**  
**40' Lubrication Service Container**






Explanation  
 ...

Info  
 Date : 07.08.2021  
 Rev. : 03 / 30.08.2021  
 Per. : Metin ALCAR  
 Tel : 0544 242 04 91  
 Mail : sales@aluratrailer.com



**A 13**







No	Equipment	Explanation	Orjin	Piece
1		<b>Bodywork</b> 40' HQ / ISO Container External Dimensions Length: 12.192 mm Width: 2.432 mm Height: 2.896 mm Internal Dimensions Length: 12.024 mm Width: 2.350 mm Height: 2.697 mm Area : 76.2 m3 Tare: 4.020 kg. Floor: Polywood 18 mm Floor Covering: PVC 2,5 mm	Alura Turkey	1
2		<b>Aluminum Shutters</b> Manuel Working Locking Systems Size : 1000 x 2300 mm	ALURA Turkey	2







No	Equipment	Explanation	Orjin	Piece
3	      	<p><b>Lubrication Oil Set</b>            Pneumatic pumps for oil            Flow rate: 20 l / min            Air inlet - Fluid Out connection: G 1/4 - G 1/2            Air working pressure: 6/8 bar            Average air consumption: 230 l / min            Noise level: 81 dB            Oil viscosity: 80 SAE</p> <p><b>Drum Hose Reels</b>            Pressure: 150 bar            Compatible fluids: Oils and Similar            Material: Painted Steel            Inlet-Outlet : G 1/2 "f - G 1/2 "m            Operating temperature: -40 / +100            Pressure - Size: 1/2 " - 160 bar            Length: 15 mt</p> <p><b>Guns for dispensing</b>            Flu: Technopolymer            Digital meter: Yes            Inlet swivel joint: G 1/2 f            Filter: Yes            Level locking button: Yes</p>	Rassm Italy	8




No	Equipment	Explanation	Orjin	Piece
4	   	<p><b>Coolant Set</b>            Pneumatic pumps for oil            Flow rate: 20 l / min            Air inlet - Fluid Out connection: G 1/4 - G 1/2            Air working pressure: 6/8 bar            Average air consumption: 230 l / min            Noise level: 81 dB            Oil viscosity: 80 SAE</p> <p><b>Drum Hose Reels</b>            Pressure: 150 bar            Compatible fluids: Coolant &amp; Water            Material: Painted Steel            Inlet-Outlet : G 1/2 "f - G 1/2 "m            Operating temperature: -40 / +100            Pressure - Size: 1/2 " - 160 bar            Length: 15 mt</p> <p><b>Guns for dispensing</b>            Flu: Technopolymer            Digital meter: Yes            Inlet swivel joint: G 1/2 f            Filter: Yes            Level locking button: Yes</p>	Raasm Italy	1
5		<p><b>Lubrication Grease Set</b>            Grease dispenser kit for drums external            Ratio: 50:1            Flow rate: 1500 g/min            For drums with internal: ø 370/420            Compatible fluids: Greases, medium / high viscosity            Air inlet - Fluid out connection: G1/4f - G3/8f            Air working pressure: 6/8 bar            Average air consumption: 330 l / min            Noise level: 81 dB            Weight: 4.6kg</p> <p>Grease guns            Terminal: flexible            Inlet swivel joint: single G 1/4 ""(f)            Grease coupler: special 4-jaw</p>	Osaka Japan	1

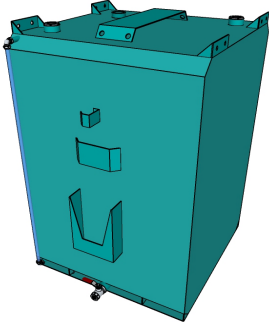

No	Equipment	Explanation	Orjin	Piece
6		<p><b>Waste Oil Systems Set</b>            Flow rate: 70 l / min            Max pressure: 8 bar.            Max cycles for minute: 400 cpm.            Max working temperature: 100 ° C            Noise level: 70 dB            Air working pressure: 2/6 Bar            Membranes: EPDM</p> <p><b>Drum Hose Reels</b>            Pressure: 150 bar.            Compatible fluids: Oils            Swivel joint: Zinc plated steel            Seals: Polyurethane            Characteristic: Fixed            Material: Painted steel            Inlet - Outlet: G 1/2 "(f) - G 1/2 "(f)            Single row steel wire braid with high tensile strength            High resistance to oil and wear            Operating temperature -40C to +100 C            Pressure: 160 bar            Length: 15 mt</p>	Rassm italy	1
7		<p><b>Diaphragm Pumps - In</b>            Polypropylene And Aluminum            Fluids Waste Oil,Fresh Oil, Antifreeze,            Windshield Fluid,Water,Diesel Fuel            Flow rate: 70 l/min            Ratio: 1:1            Max pressure: 8 bar            Max suction lift: 4,5 - 7,5 m            Noise level: 75 dB            Max air consumption:0,8 m³/min            Air working pressure: 2 / 6 bar            Air inlet connection: G 3/8" (f)            Fluid inlet connection:G 3/4" (f)            Membranes: EPDM            Balls: acetal            Seats: acetal            Packing: 1 - 0,02 N° - m³            Gross weight: 6,3 kg</p>	Raasm italy	2

No	Equipment	Explanation	Orjin	Piece
8		<b>Plastic Tracked Ibc Tank</b> Capacity: 1.000 lt. / 275 gr. Usage Area: Liquid product storage Weight: 60 kg. Size: 1.200x1.000x1.160 mm Feature: Galvanized, welded steel mesh	NBA Turkey	2
9	   	<b>Washing Machine COLD</b> Electric Cold Washing Machine Pressure: 150 bar Flow rate: 700 lt / hour Engine Power: 3 kW Voltage - Phase 380V-3 50 Hz Weight: 74 Whasing Gun Pressure: 200 bar. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel Inlet: G 3/8 " (f) Outlet: G 3/8 "(f) Internal drum width: 110 mm Single row steel wire braid with high tensile strength High resistance to oil and wear Operating temperature -40 C / +100 C Size: 3/8 " Pressure: 160 bar Length: 25 mt.	Rottest Turkey	1
10		<b>Water Transfer Set</b> Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Maximum leaving water : 35 °C Connection type : G1 Power Cable H05RN-F : 1 m Weight without accessories : 14.7 kg Dimensions (L x W x H): 506 x 270 x 5 mm	Karcher Garmany	1

No	Equipment	Explanation	Orjin	Piece
11		<b>Water Transfer Set</b> Pressure: 20 bar. Compatible fluids: Water Swivel joint: Stainless Metal Seals: Polyurethane Characteristic: Fixed Inlet: G 1/2 " (f) Outlet: G 1/2 "(g) Operating temperature -40 C / +80 C Size: 1/2 " Pressure: 10 bar Length: 20 mt	Karcher Germany	1
12		<b>Cable Roller</b> 20 Mt 5*1.5 Mm Three Phase : 400 Volt Power : 1000-3000 W Auto Rewind CE approved Weight: 9 Kg Dimensions: 42x39x23 Cm	Mavel Italy	1
13		<b>Oil / Waste Oil Tank</b> Material: Carbon Steel Capacity : 5.650 it. Dimensions : 1.000 x 2.250 x 2.500 mm. Coating : Electrostatic Paint Filling Indicator Roller Fixing Plate Relief valve	Alura Turkey	4
14		Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temperature: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min	Osaka Japan	1
15		<b>Outdoor Lighting</b> 240 Watts: 5800 Lumens Long: 30 Cm Working life: 30,000 hours Standard: IP67	EAE Turkey	10
16		<b>Control panel of all equipment.</b> Generator / Mains power connection.	ALURA Turkey	1

No	Equipment	Explanation	Orjin	Piece
17		<b>Fire extinguisher</b> Capacity: 6 kg. Full Weight: 9.1 kg. Working Pressure: 18 bar. Discharge Time: 14 sec. Extinguishing Agent: MAP@ (ABC)	Çakır Turkey	2
18		<b>Compressed air line installation.</b> Polyurethane Pneumatic fittings	ALURA Turkey	1
19		<b>Compressed air line installation.</b> Polyurethane Pneumatic hose 10 mm.	ALURA Turkey	1