
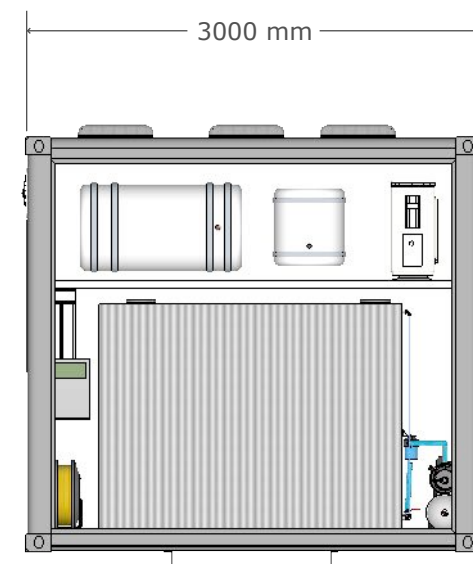
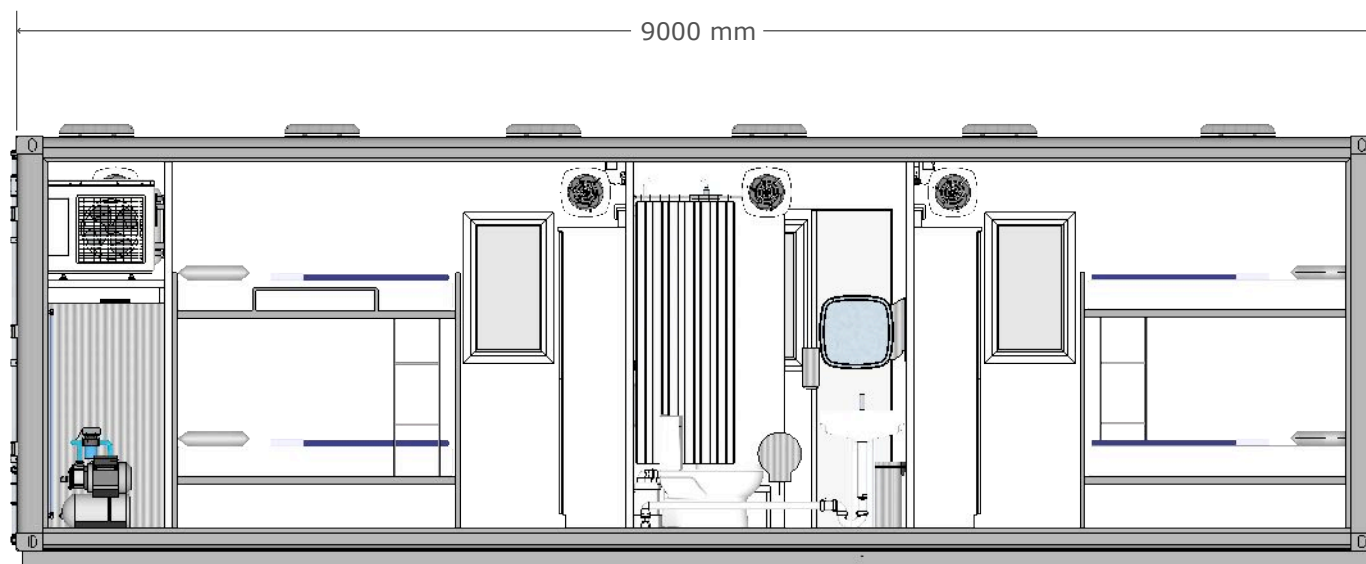



Project / Model
23.016
Living Unit / 8 Person


Info
FRP Insulated
Container Lock Centers


Date : 06.06.2023
Rev. : 00.00
Per. : Metin ALÇAR
Tel. : 0544 242 04 91
Mail : metin@aluratrailer.com


A 01

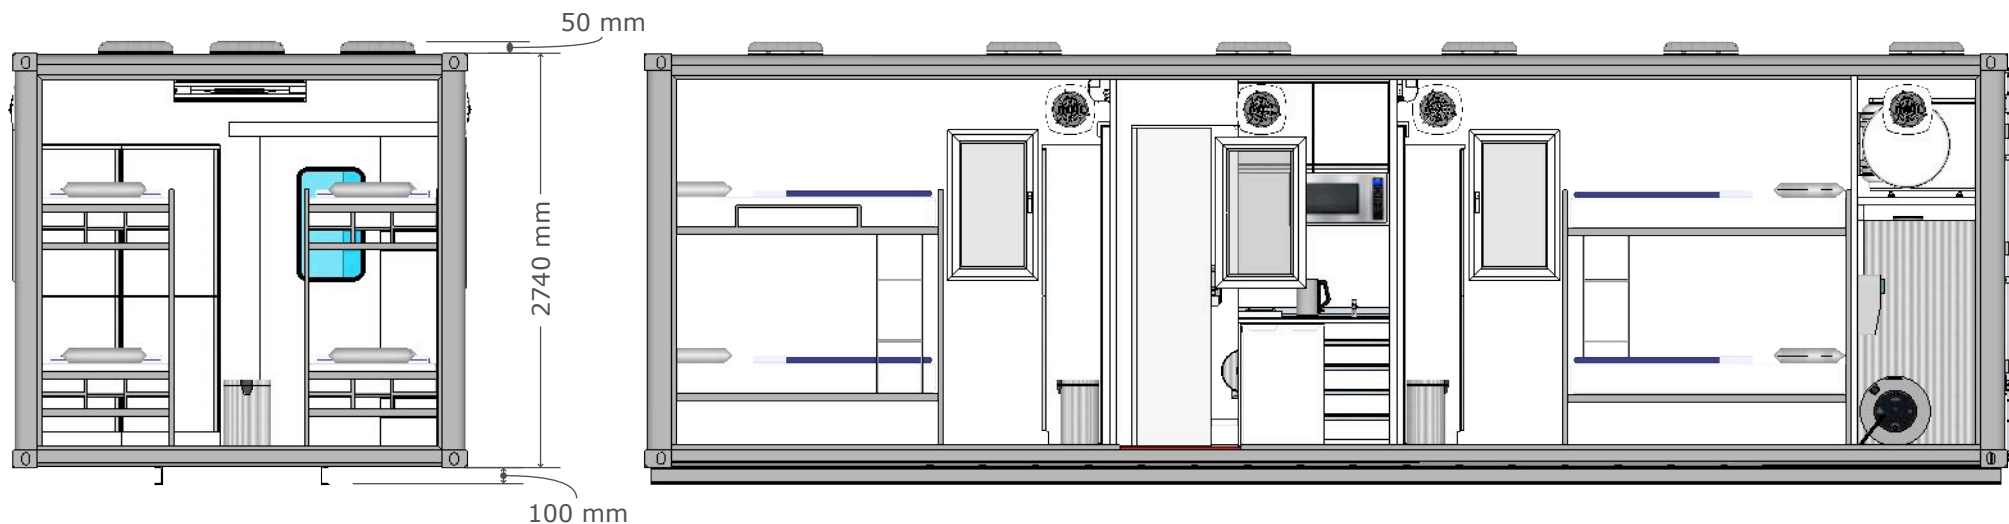


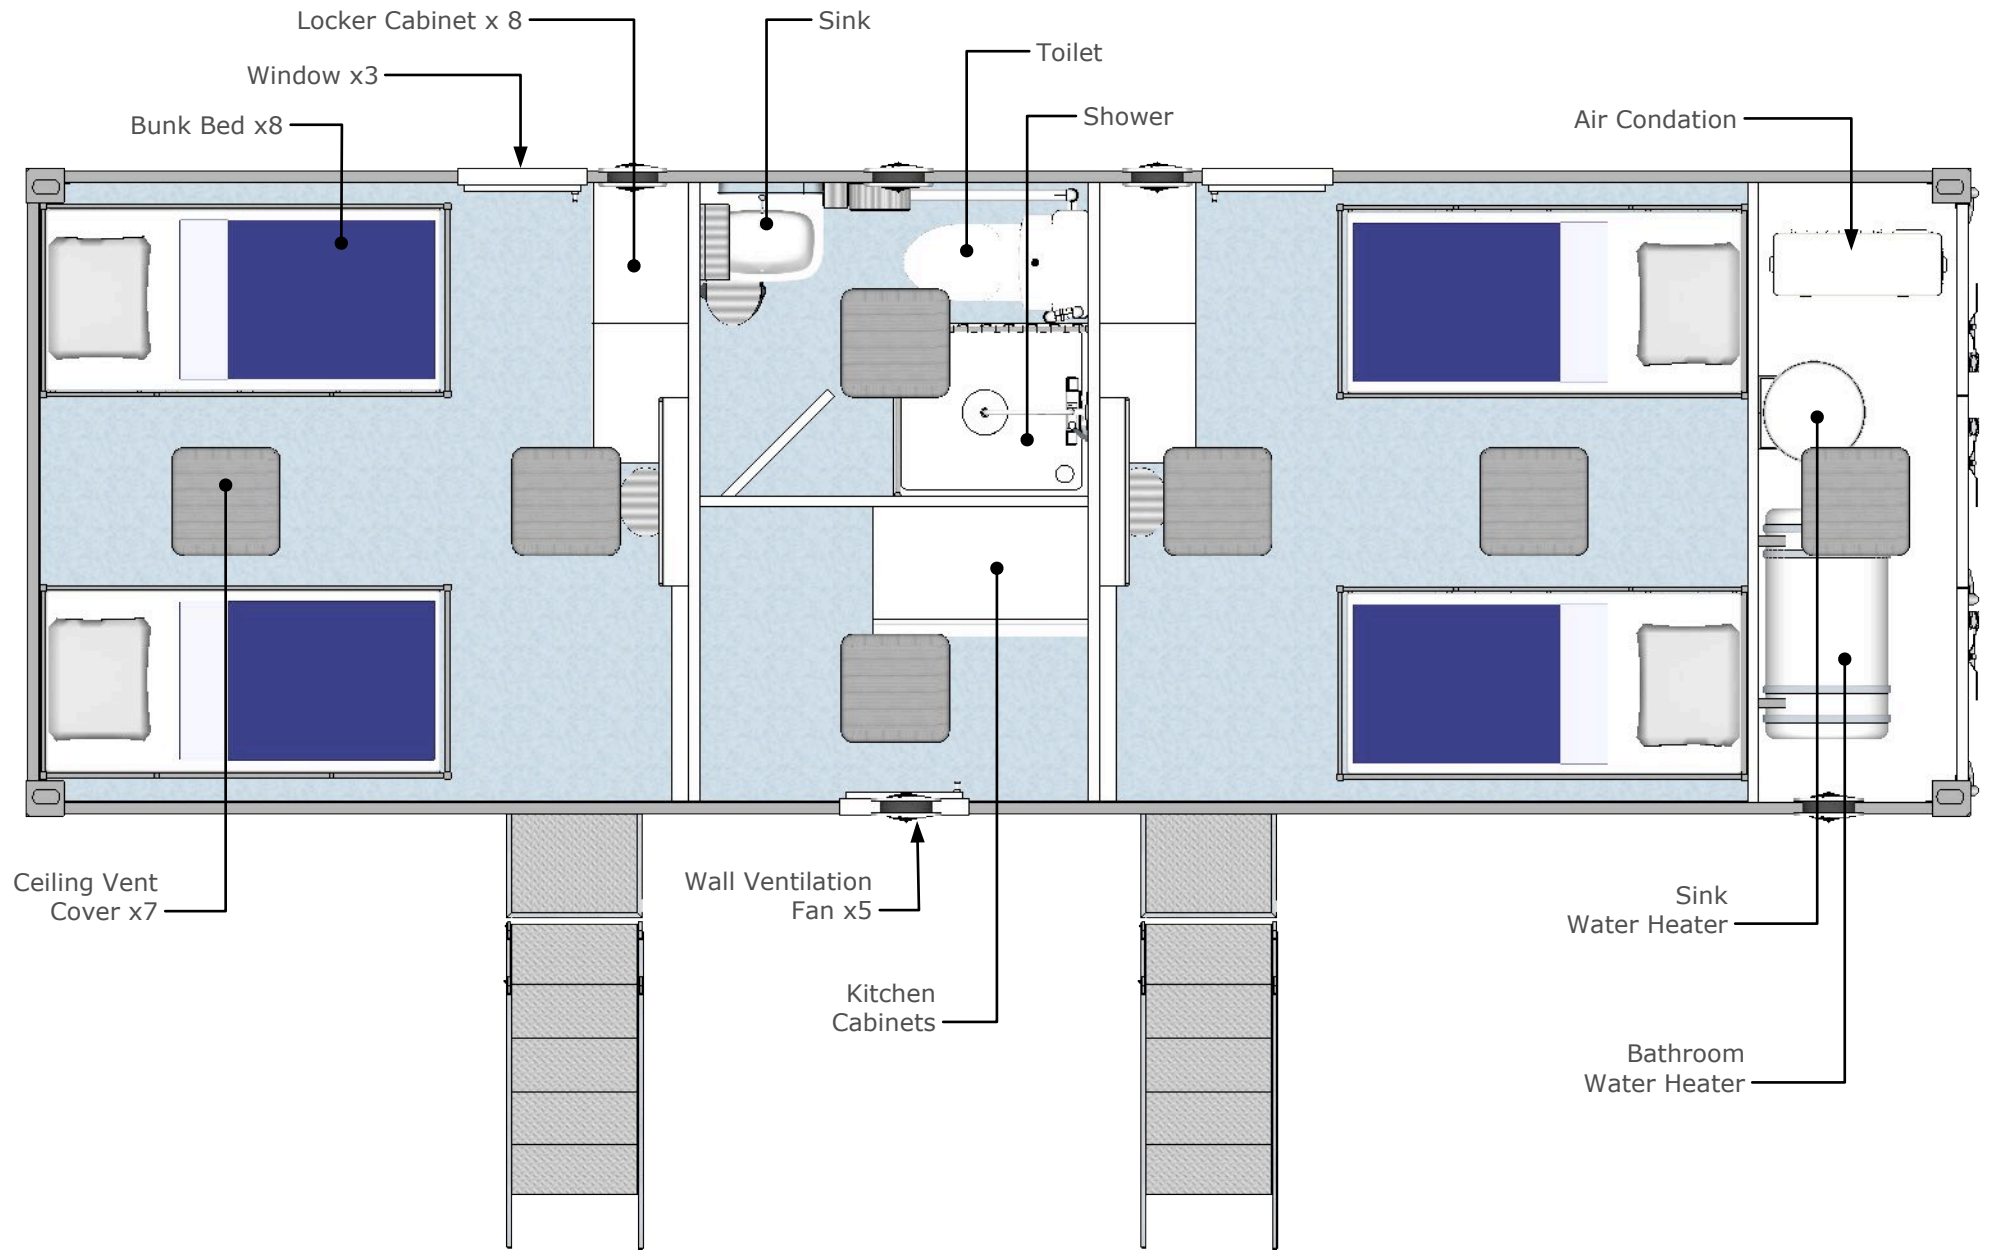


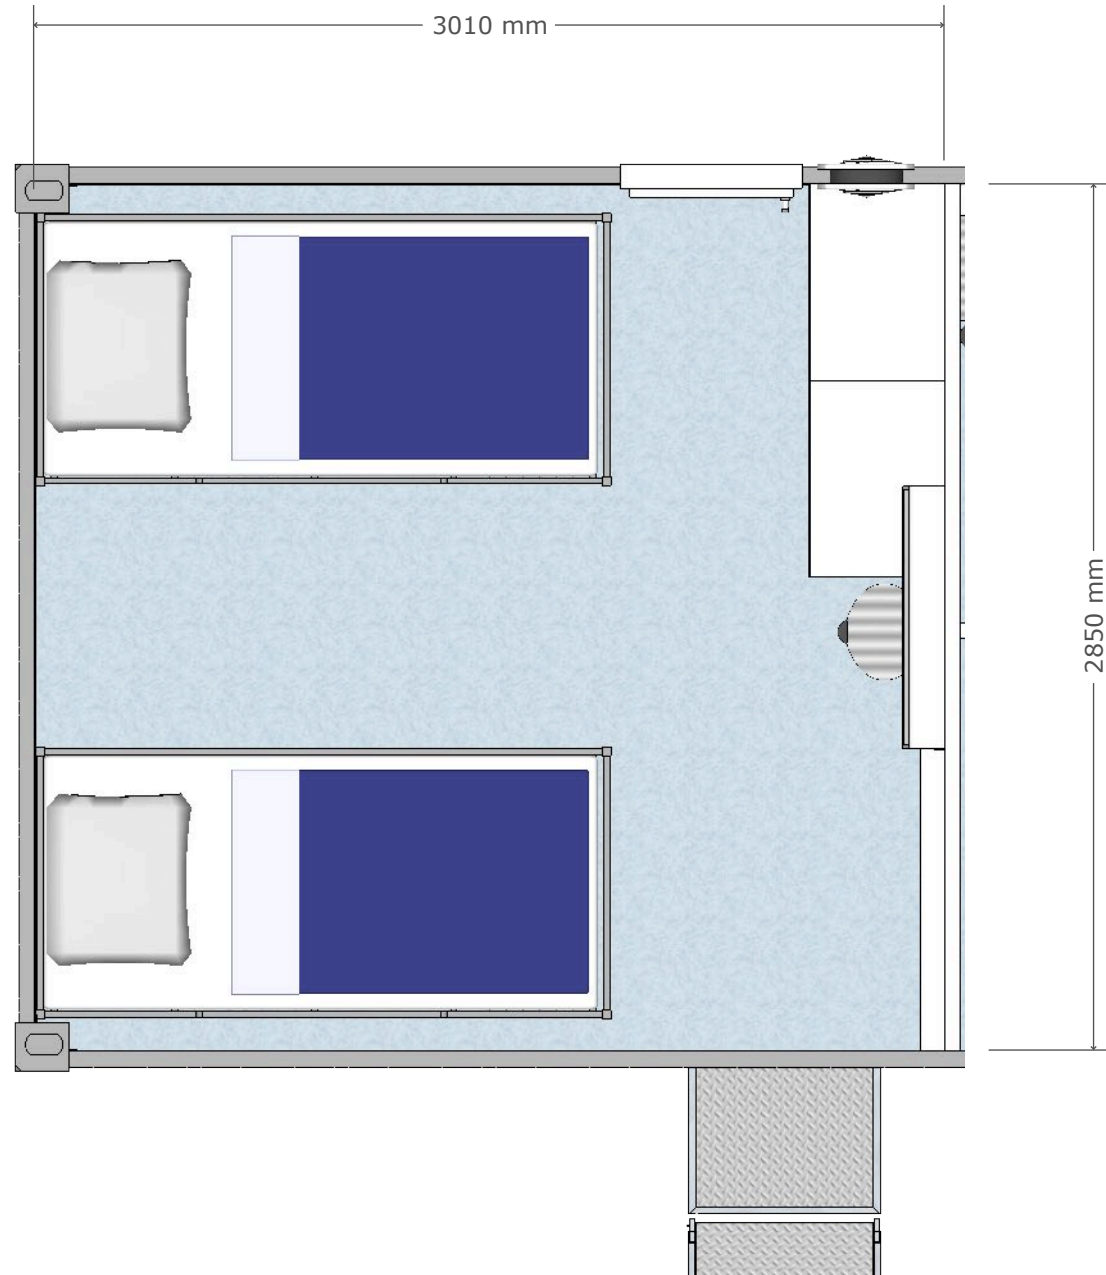


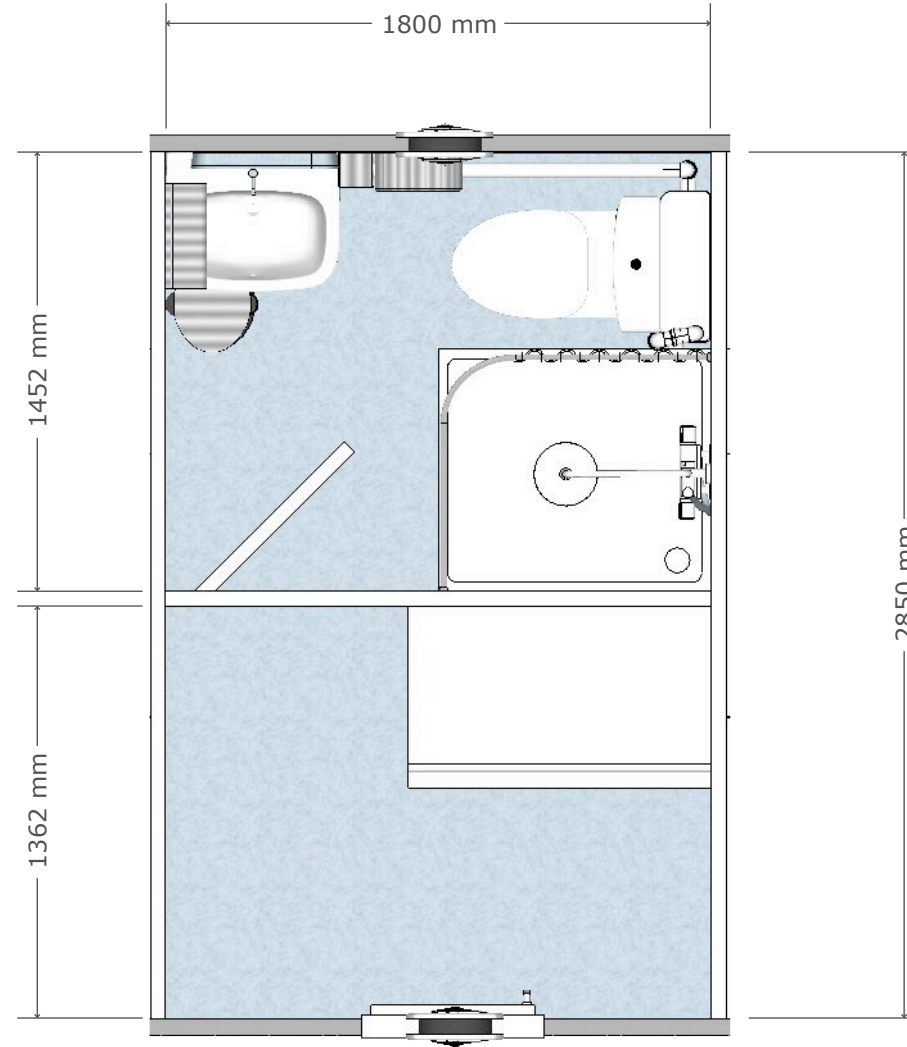

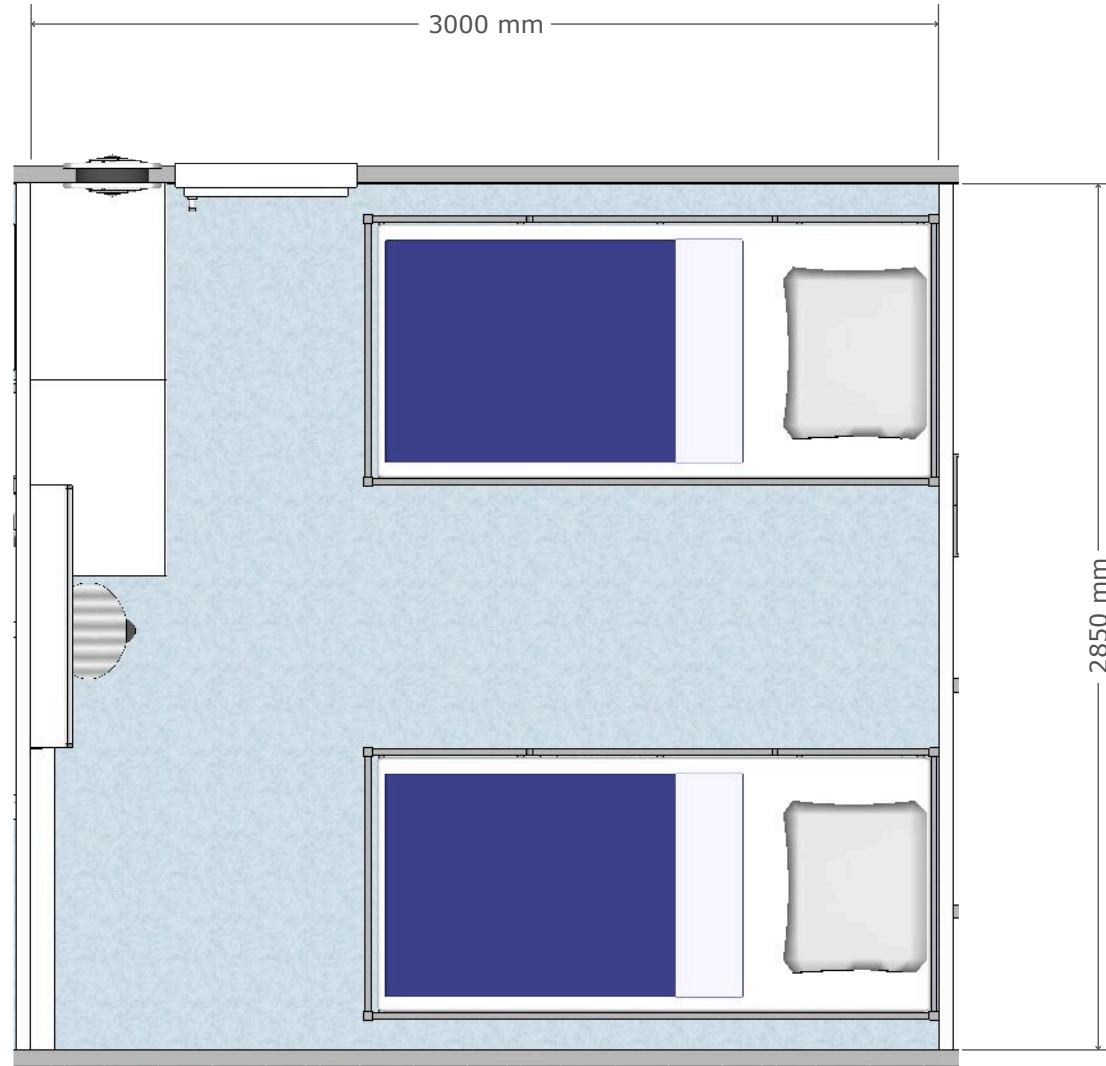

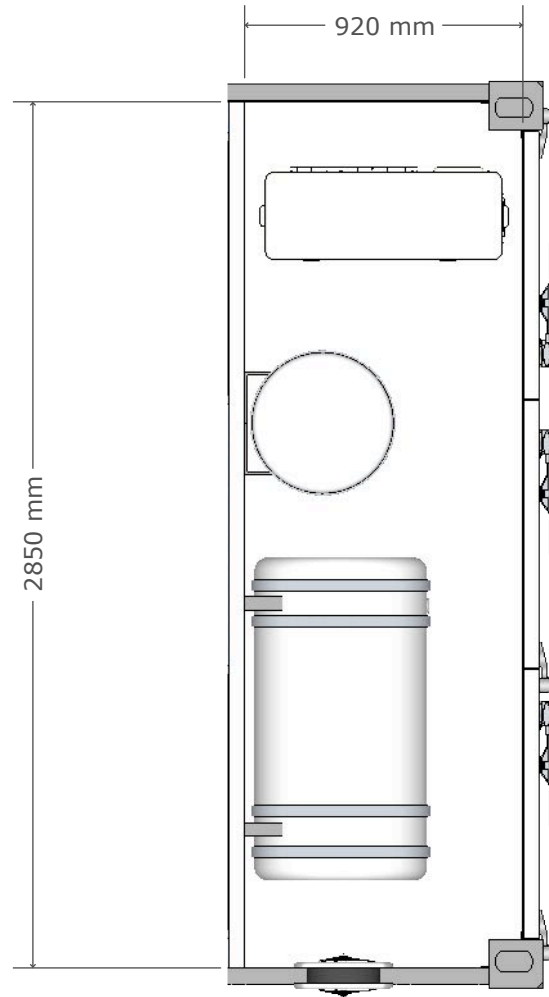

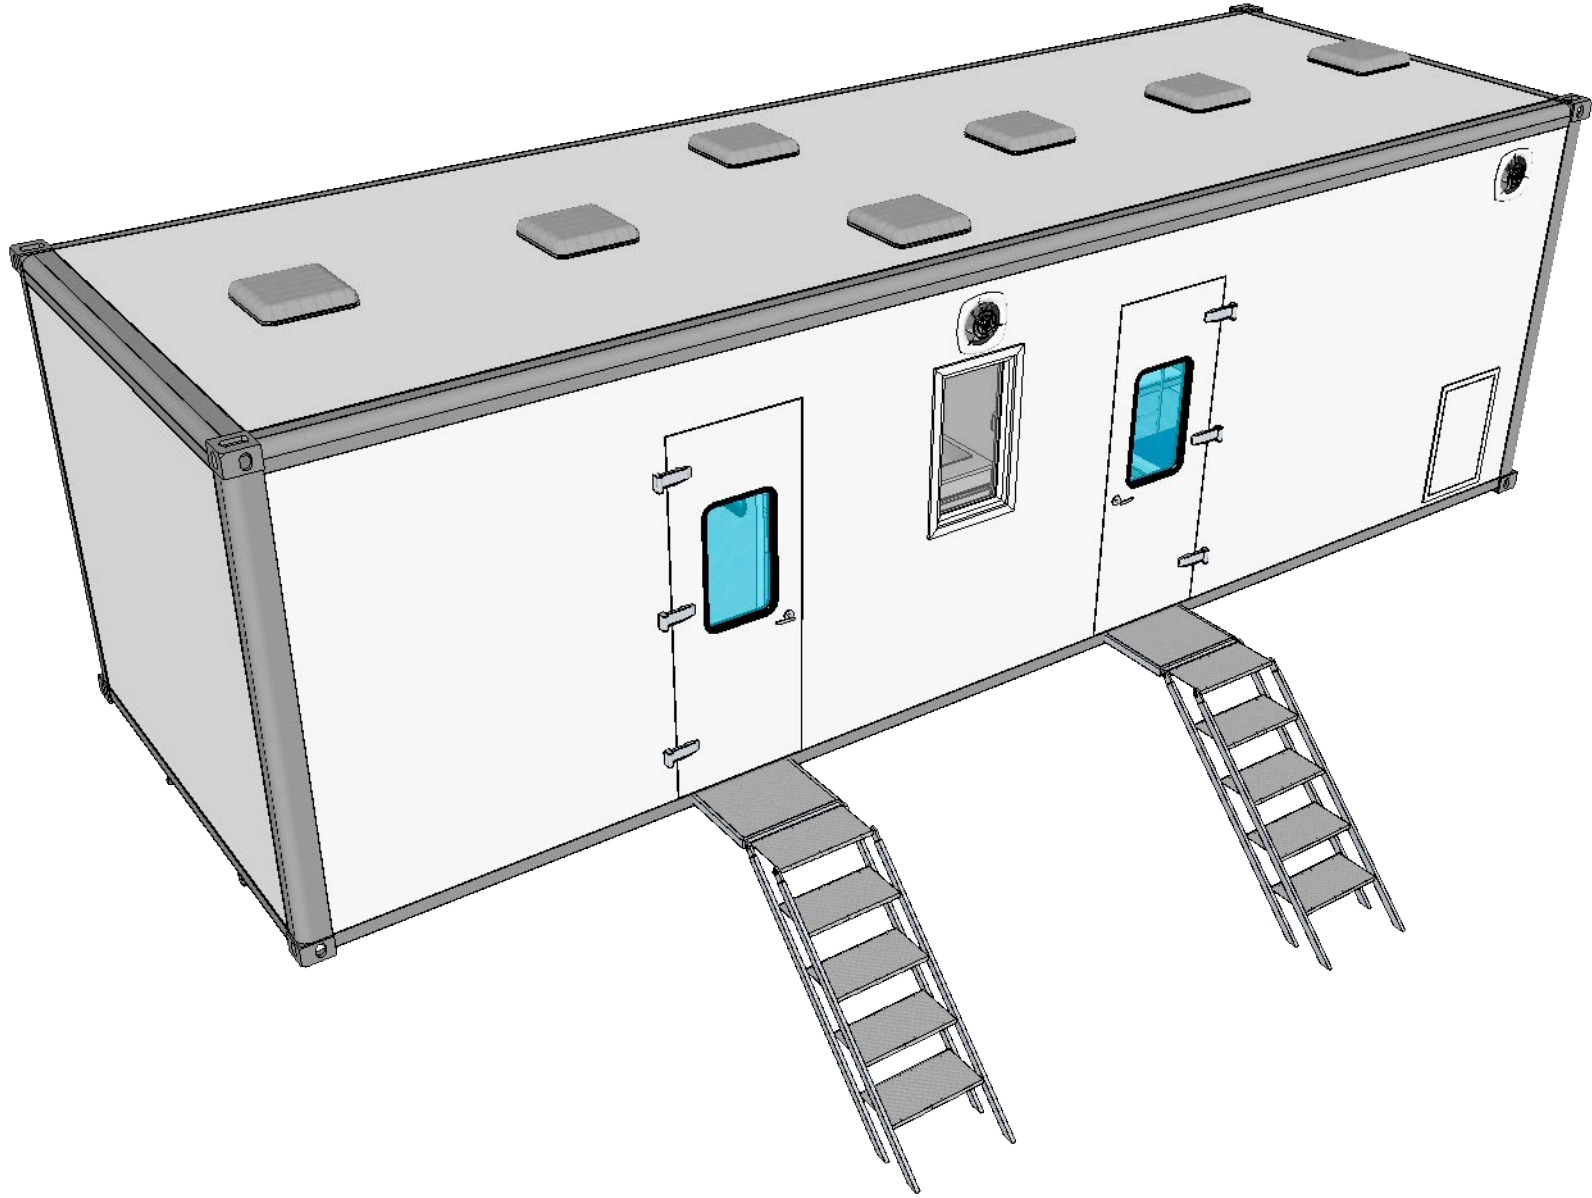

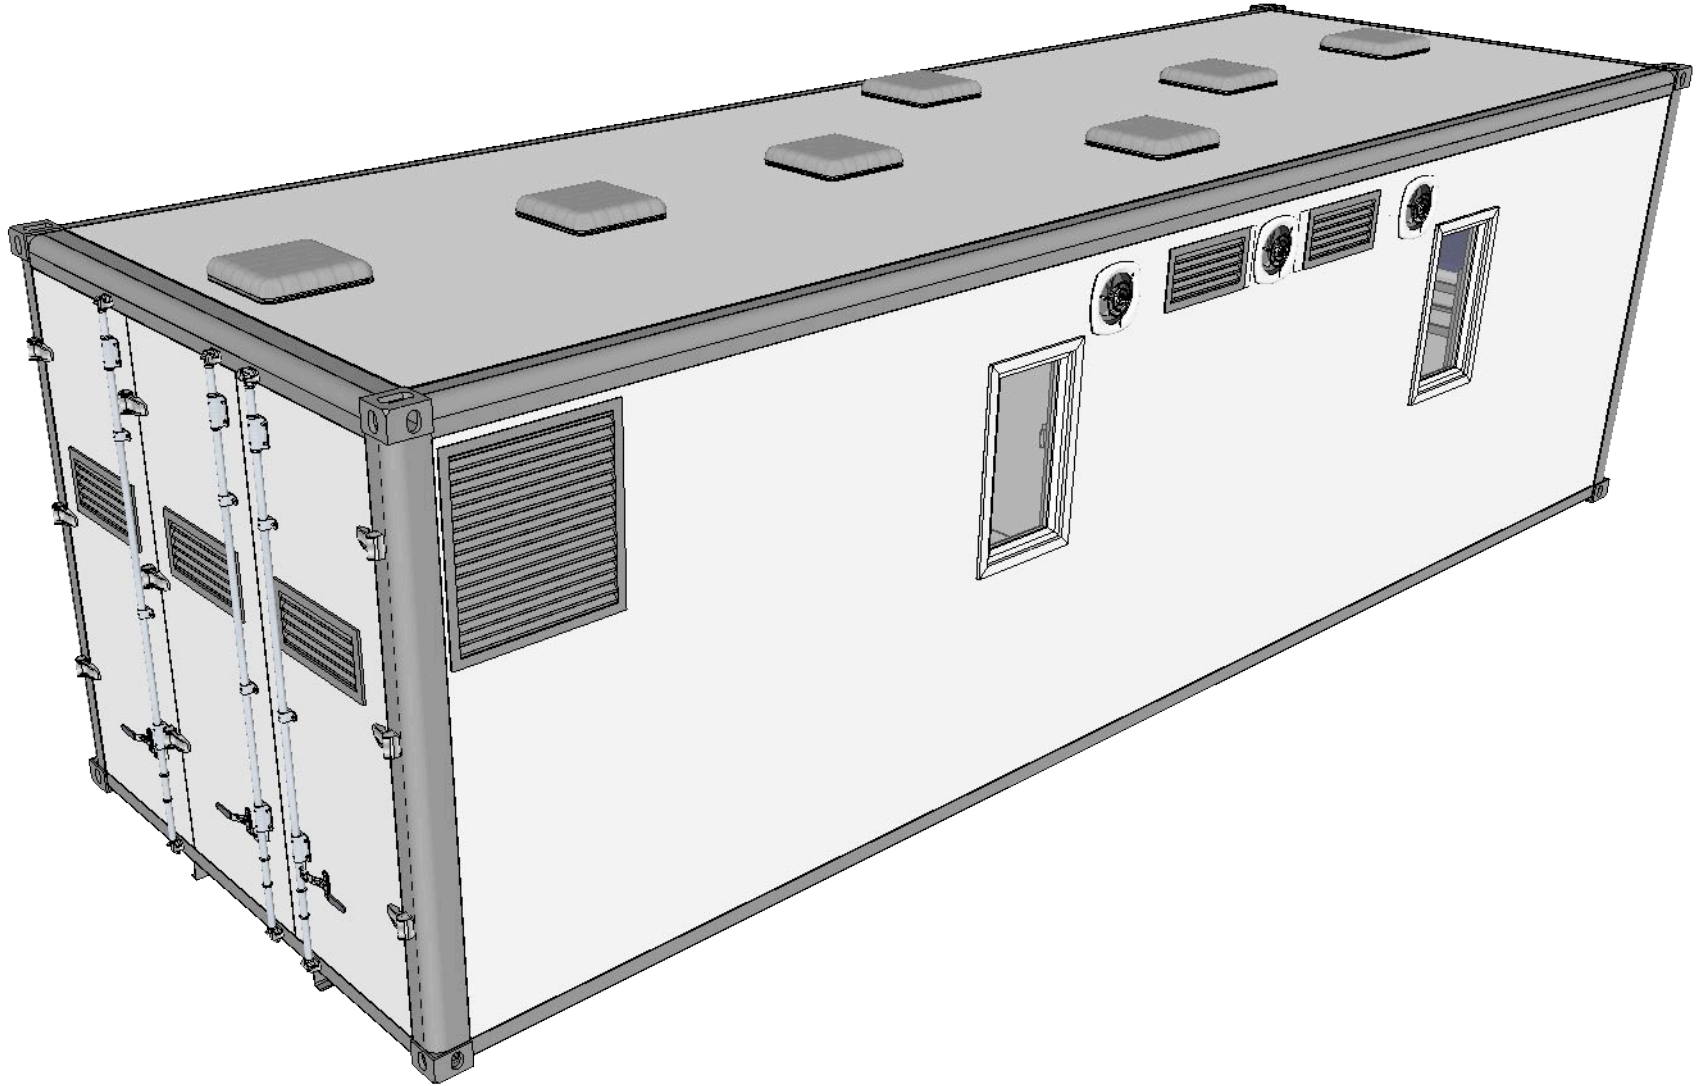

Project / Model

23.016

Living Unit / 8 Person

Info

FRP Insulated
Container Lock Centers

Date : 06.06.2023

Rev. : 00.00


Per. : Metin ALÇAR


Tel. : 0544 242 04 91


Mail : metin@aluratrailer.com


A


09

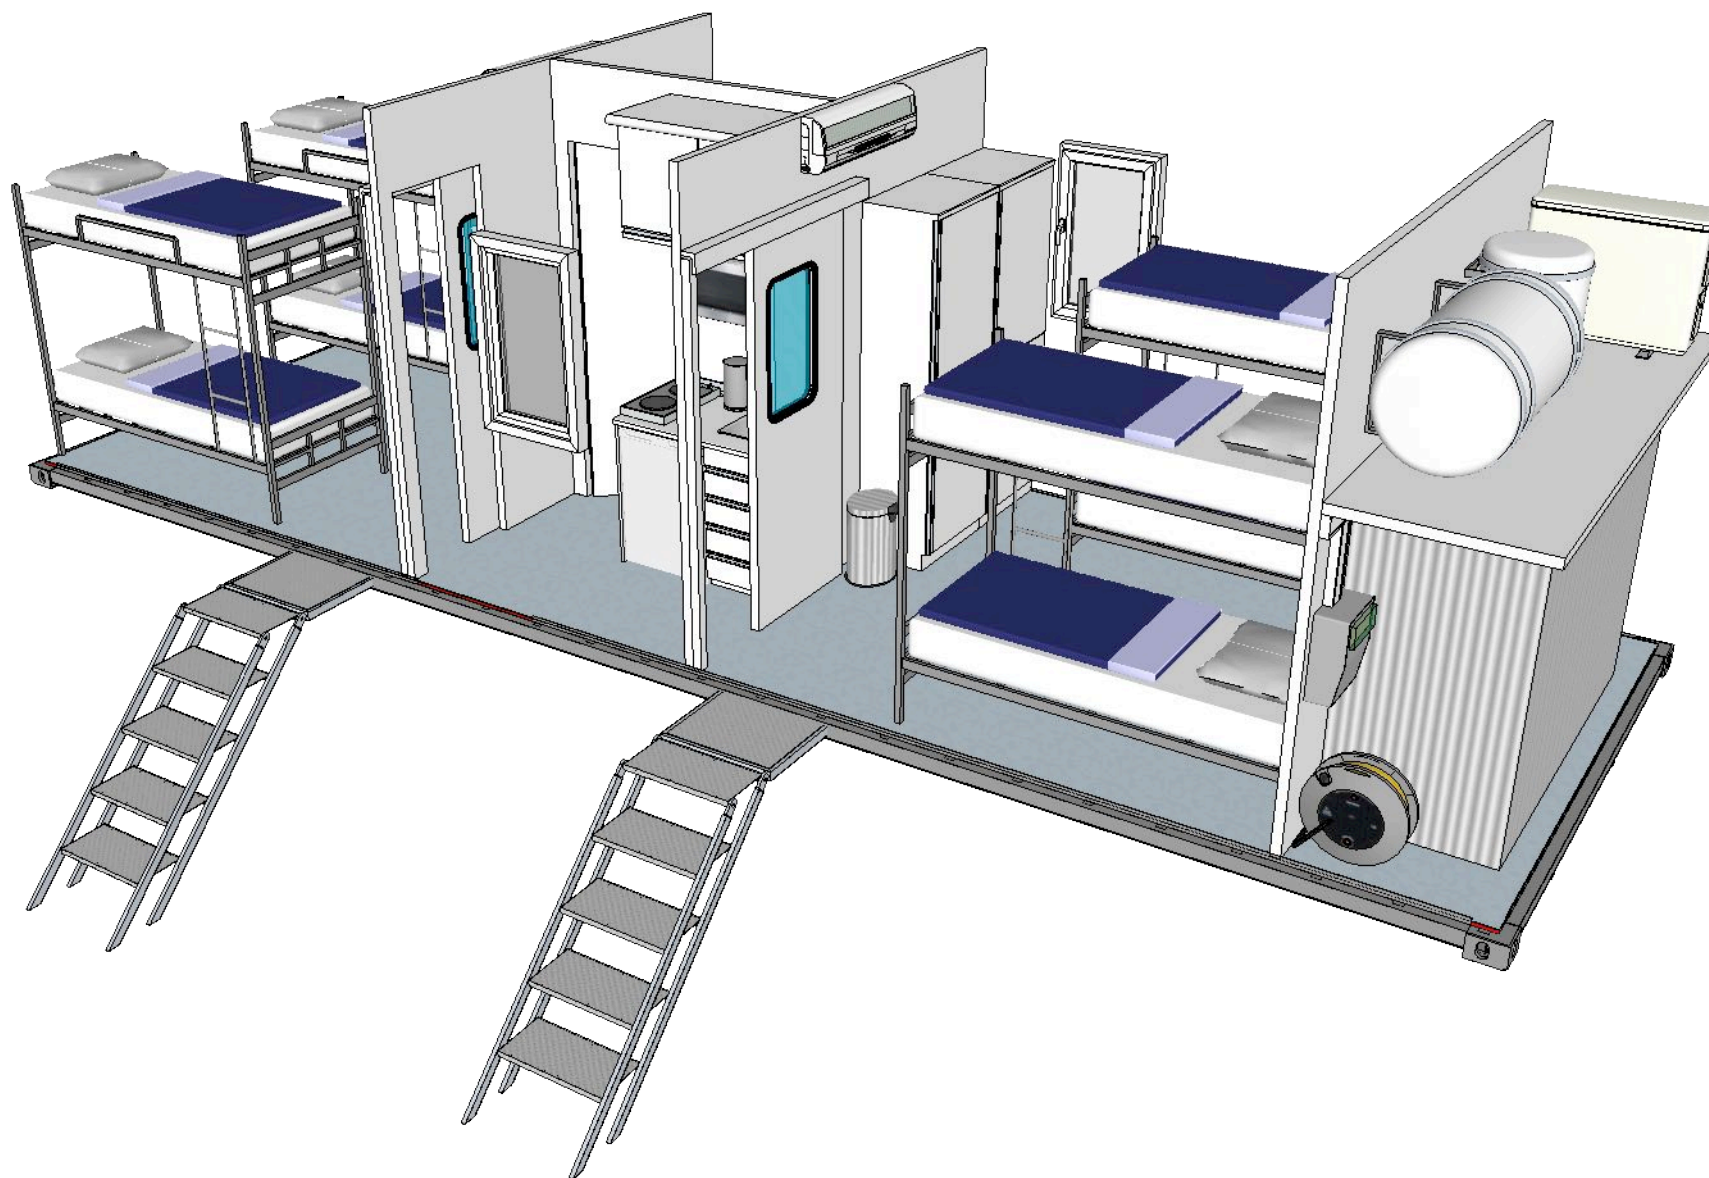


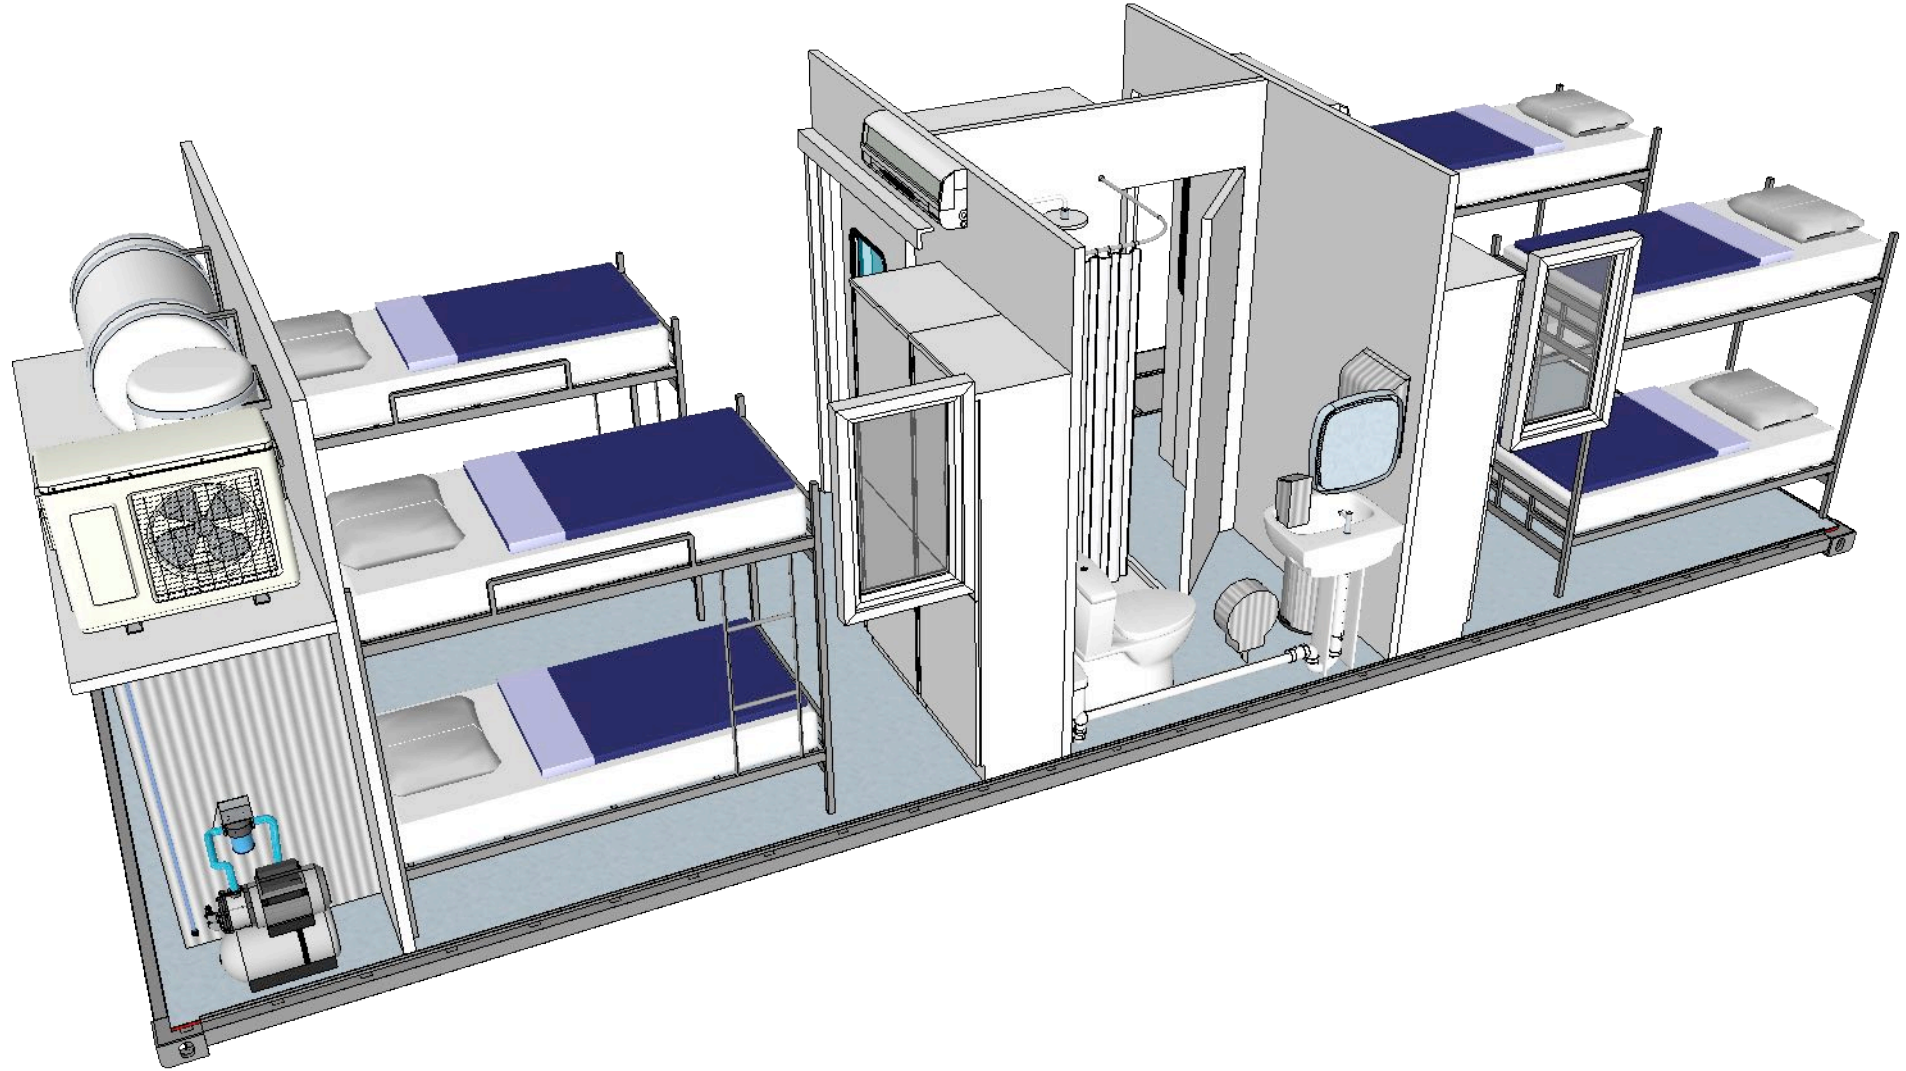


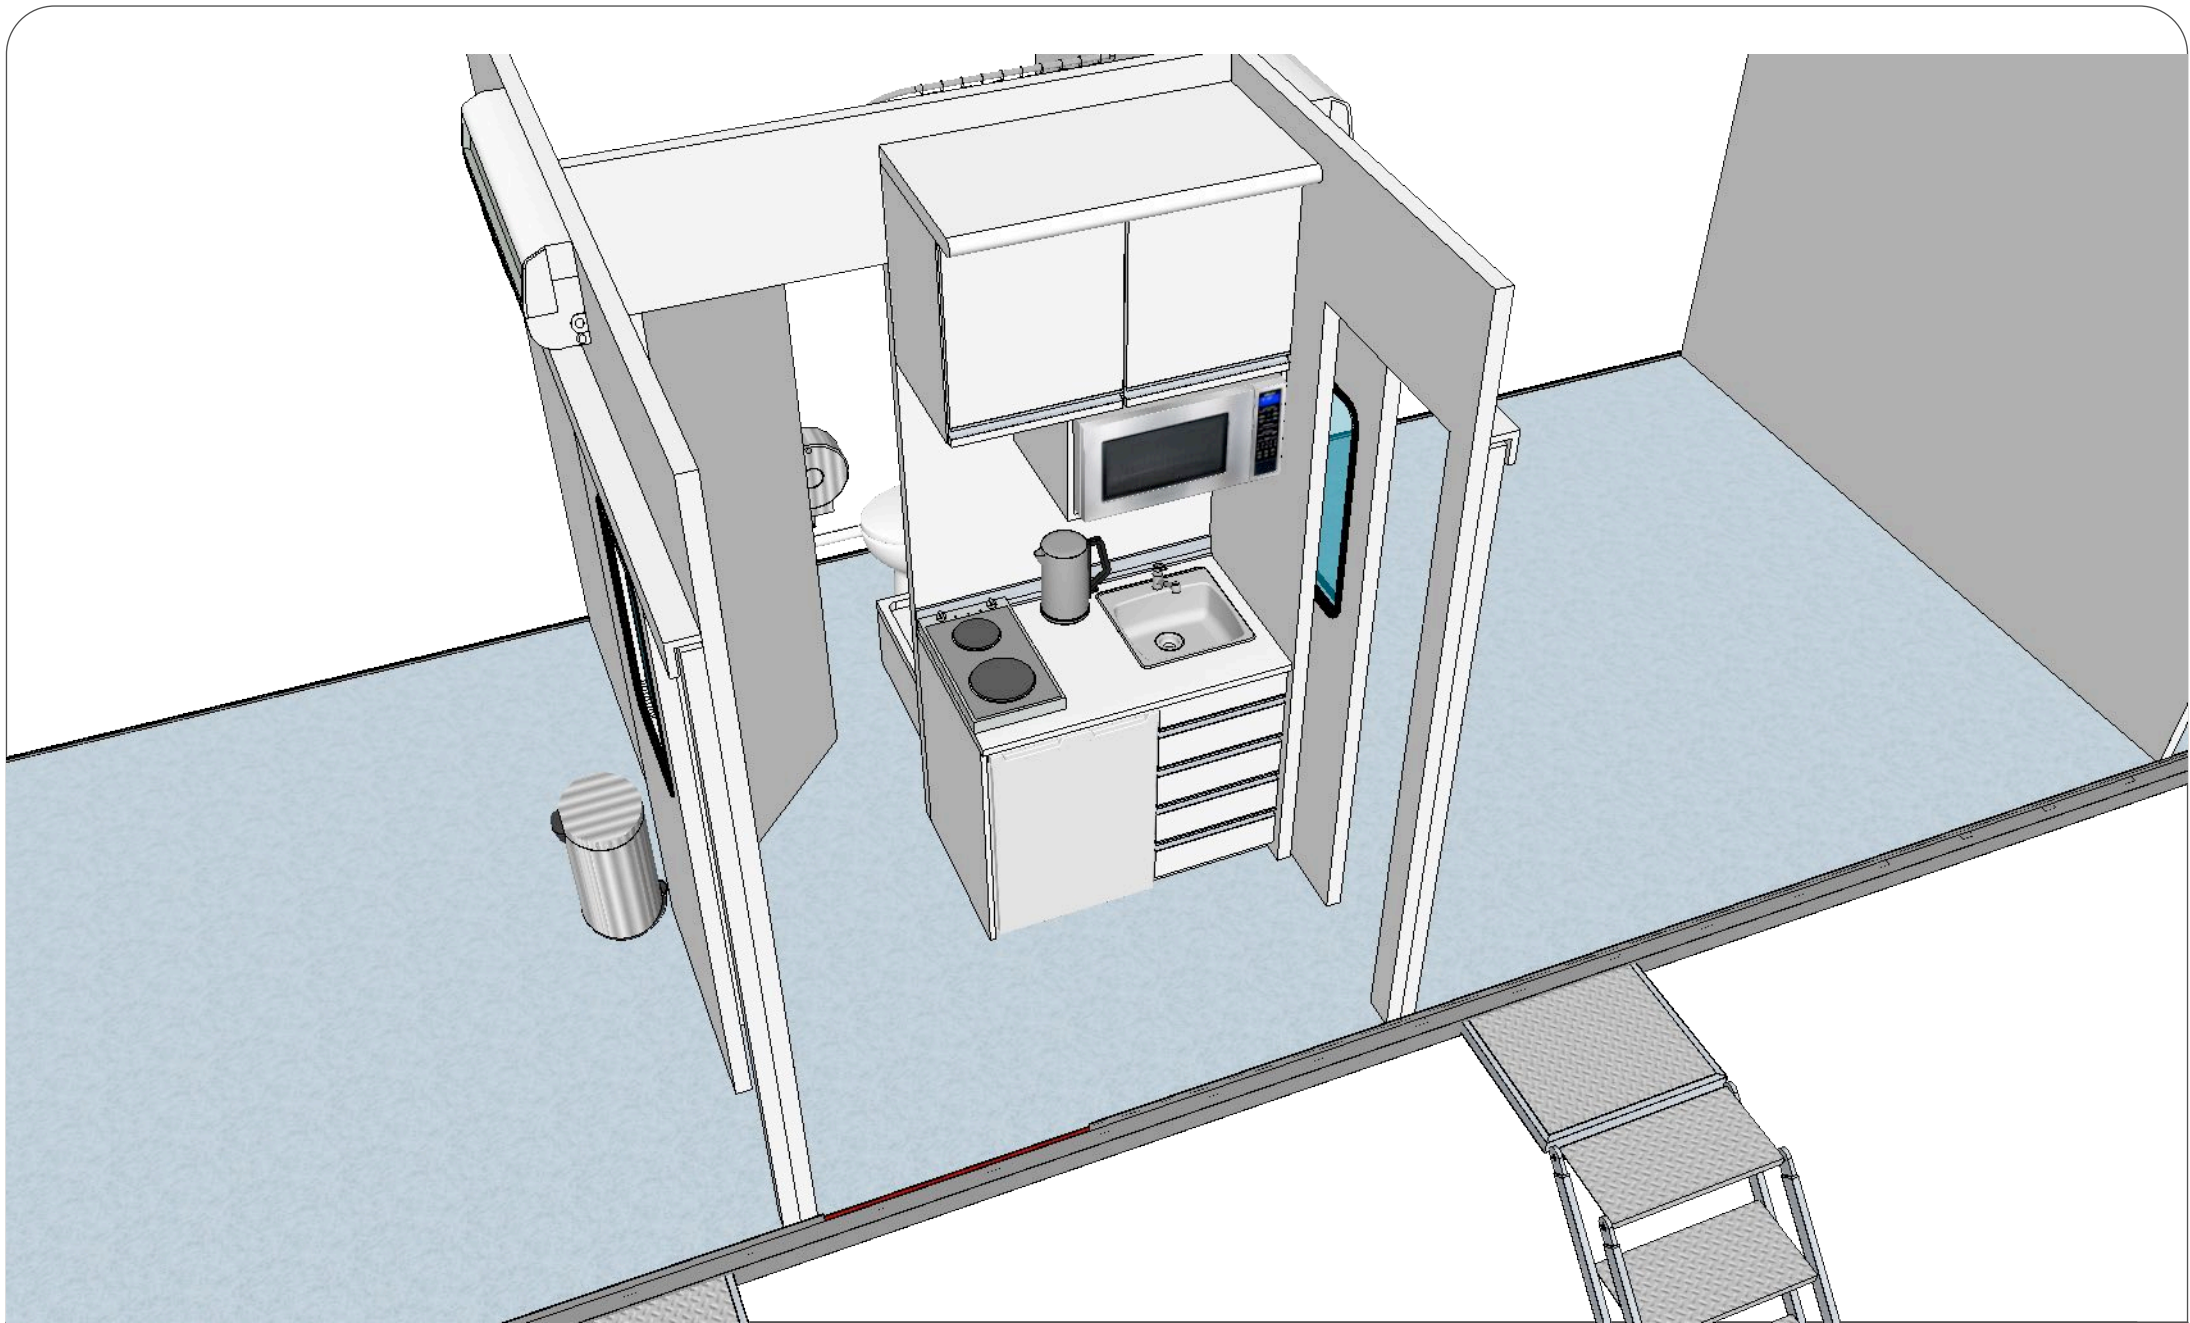


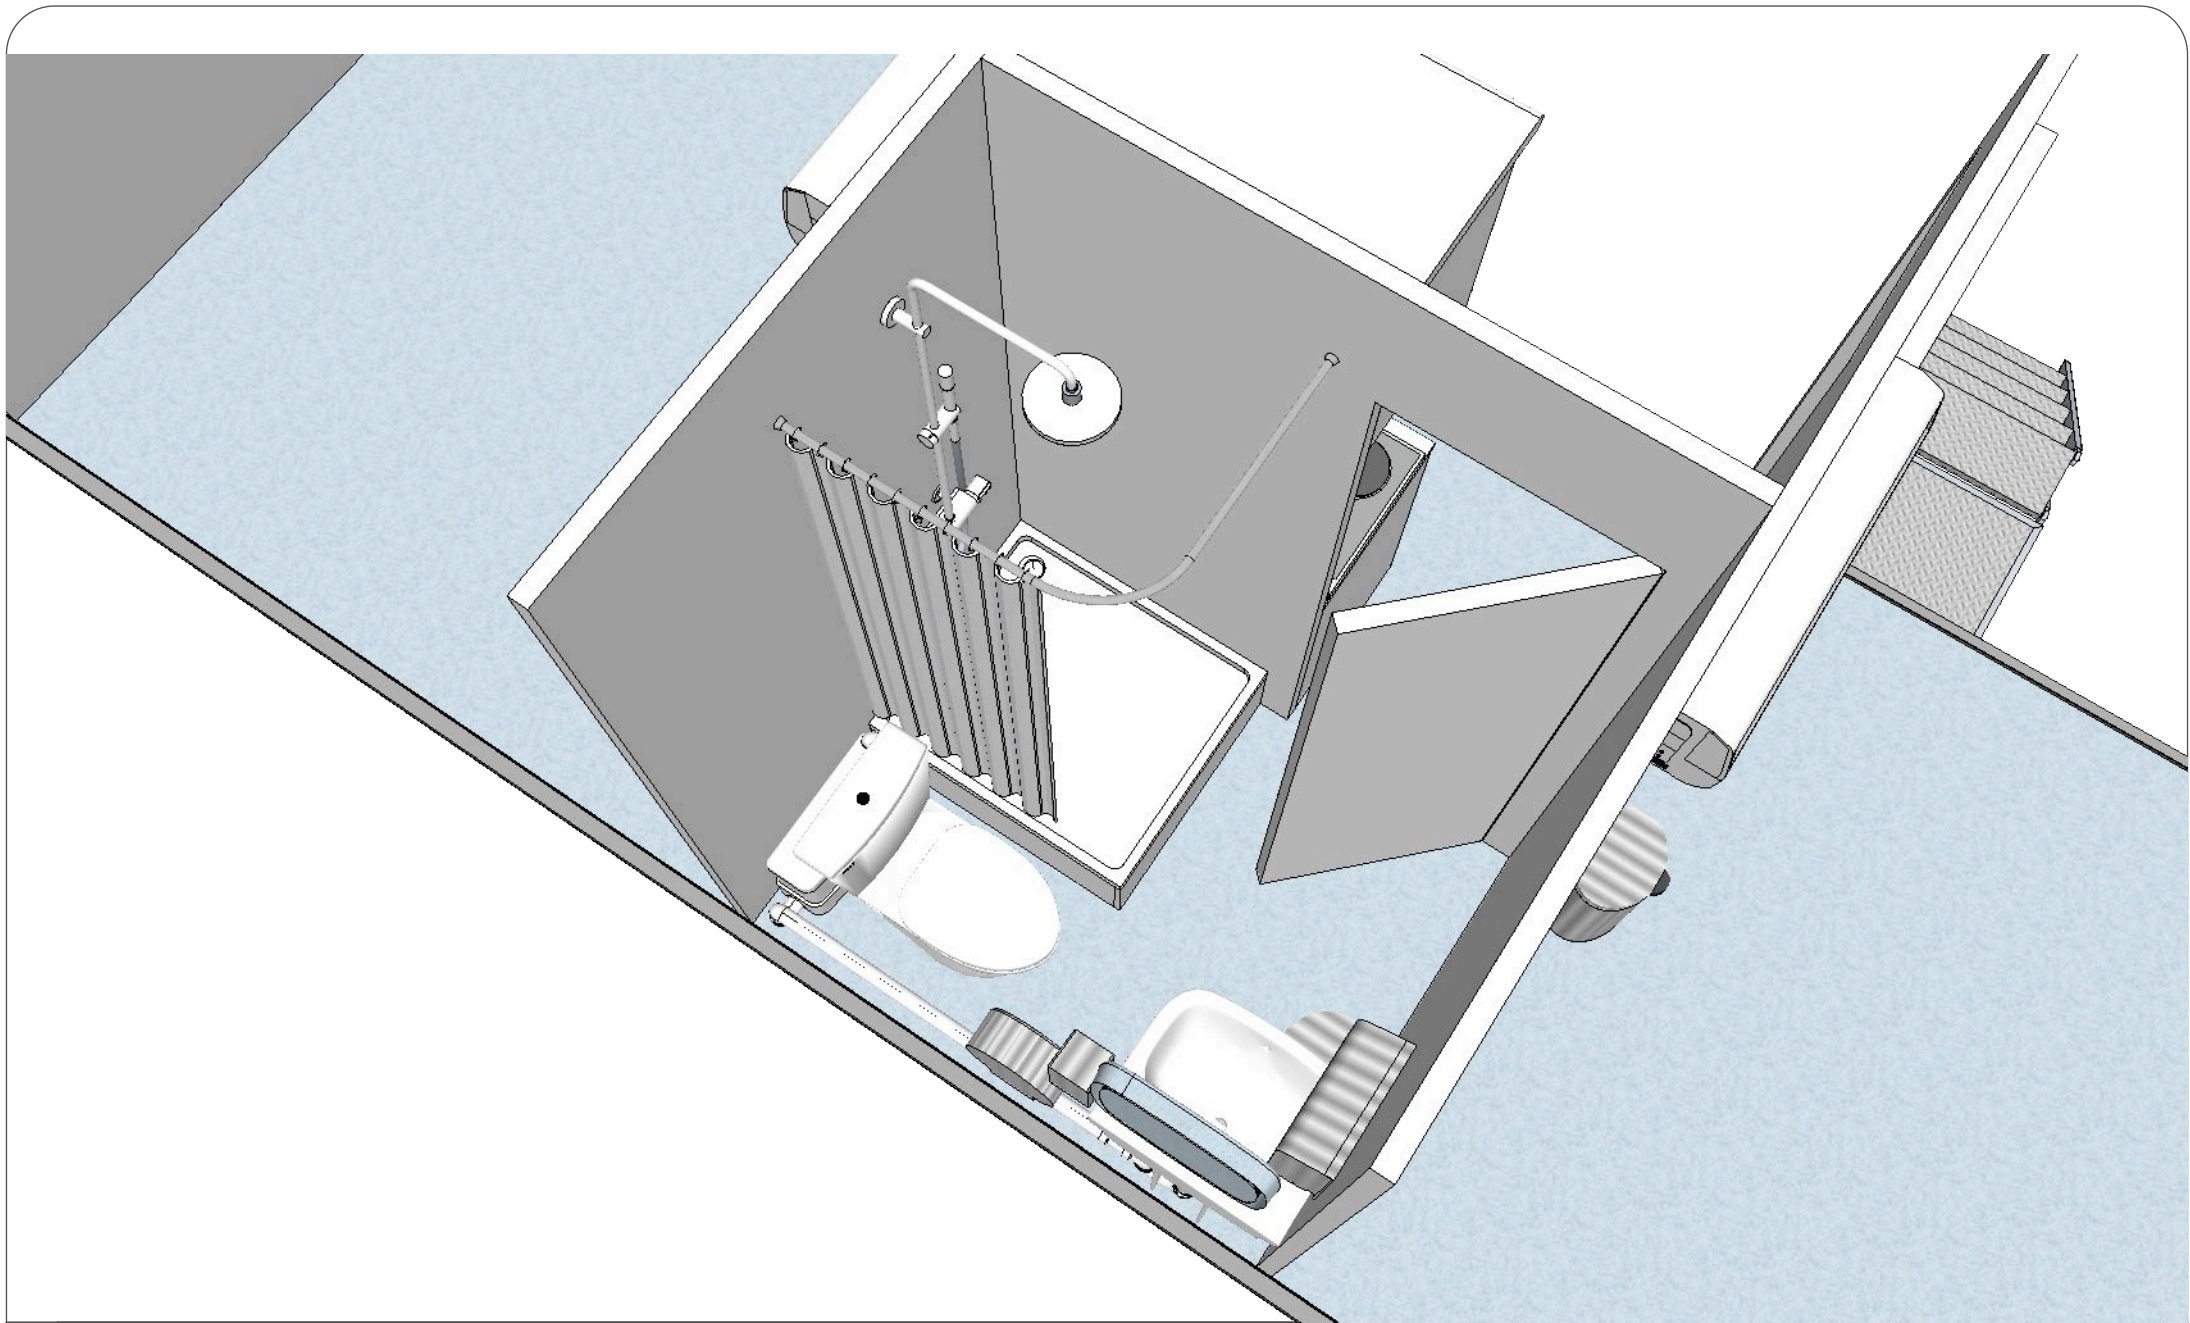

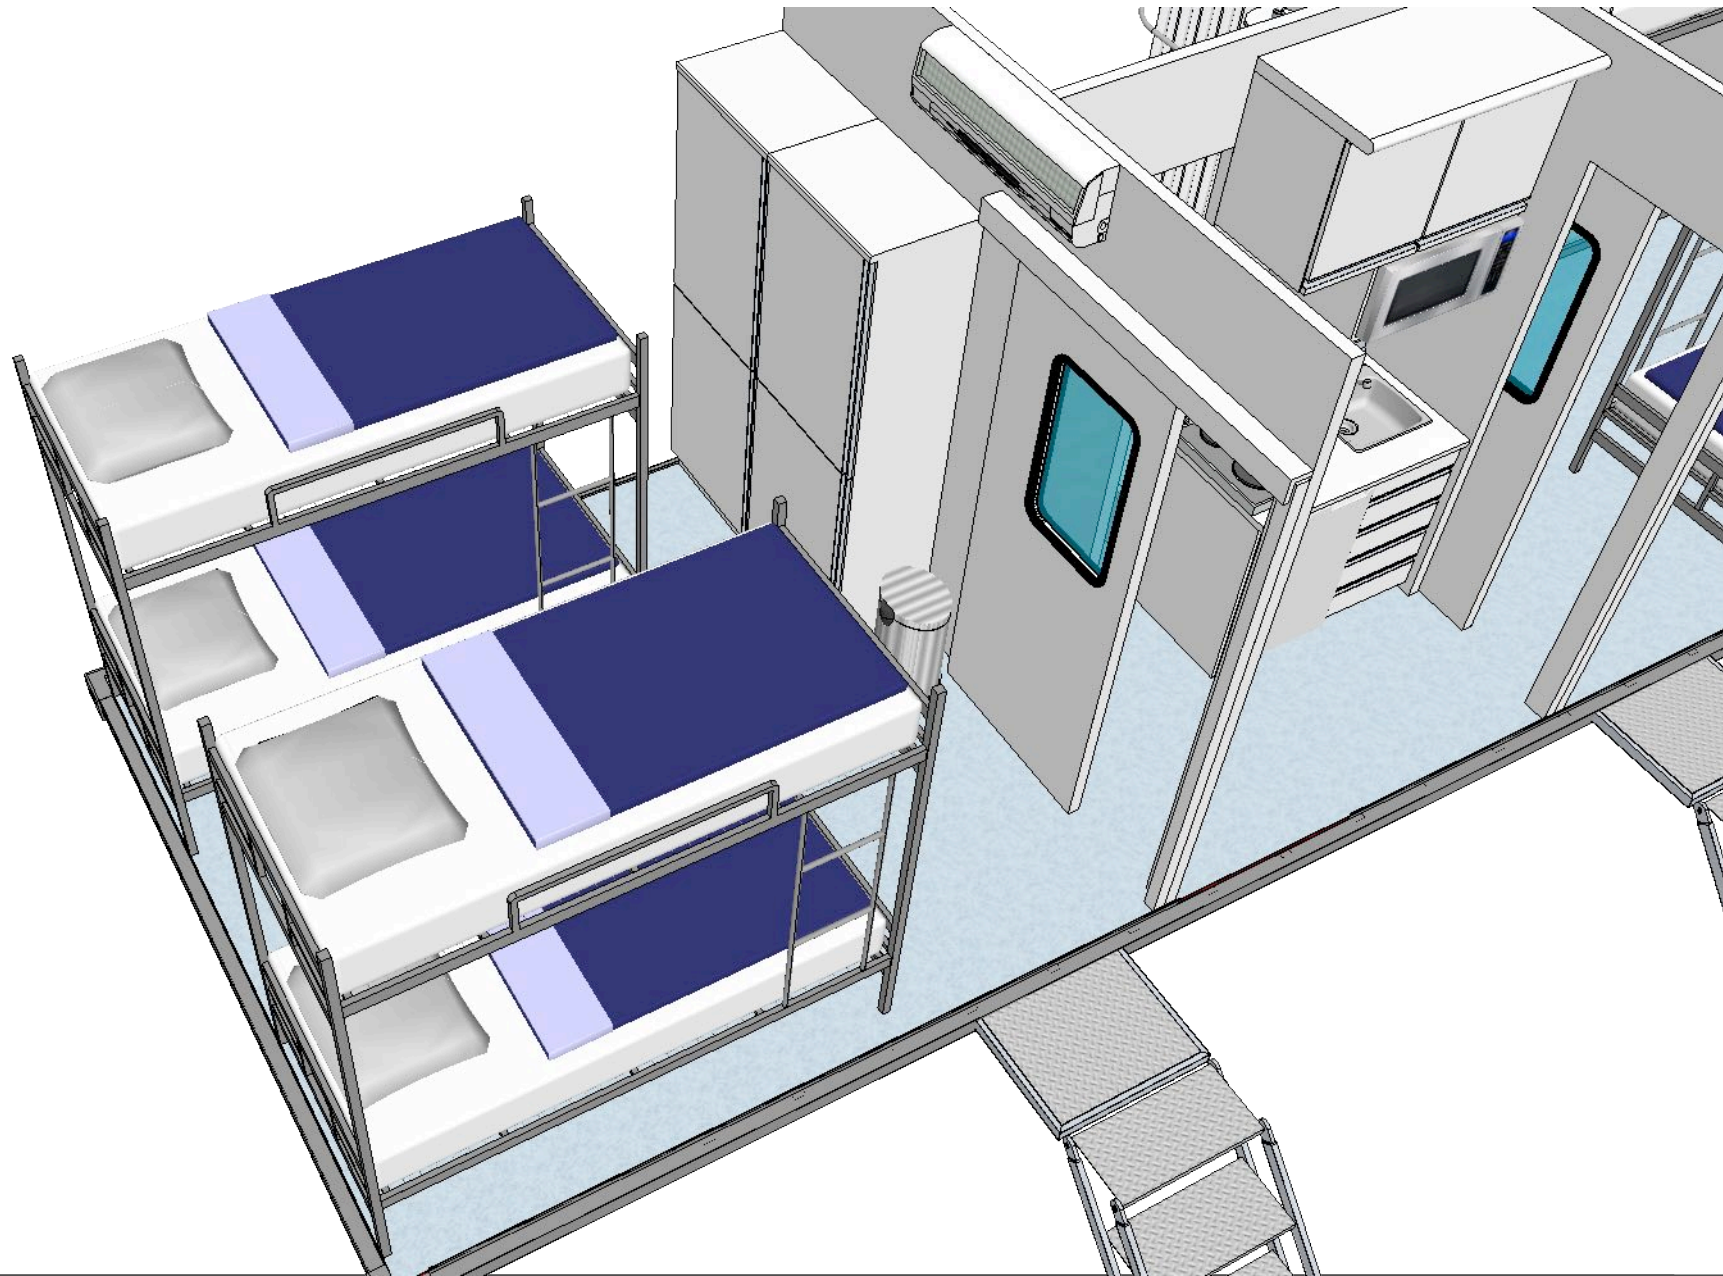

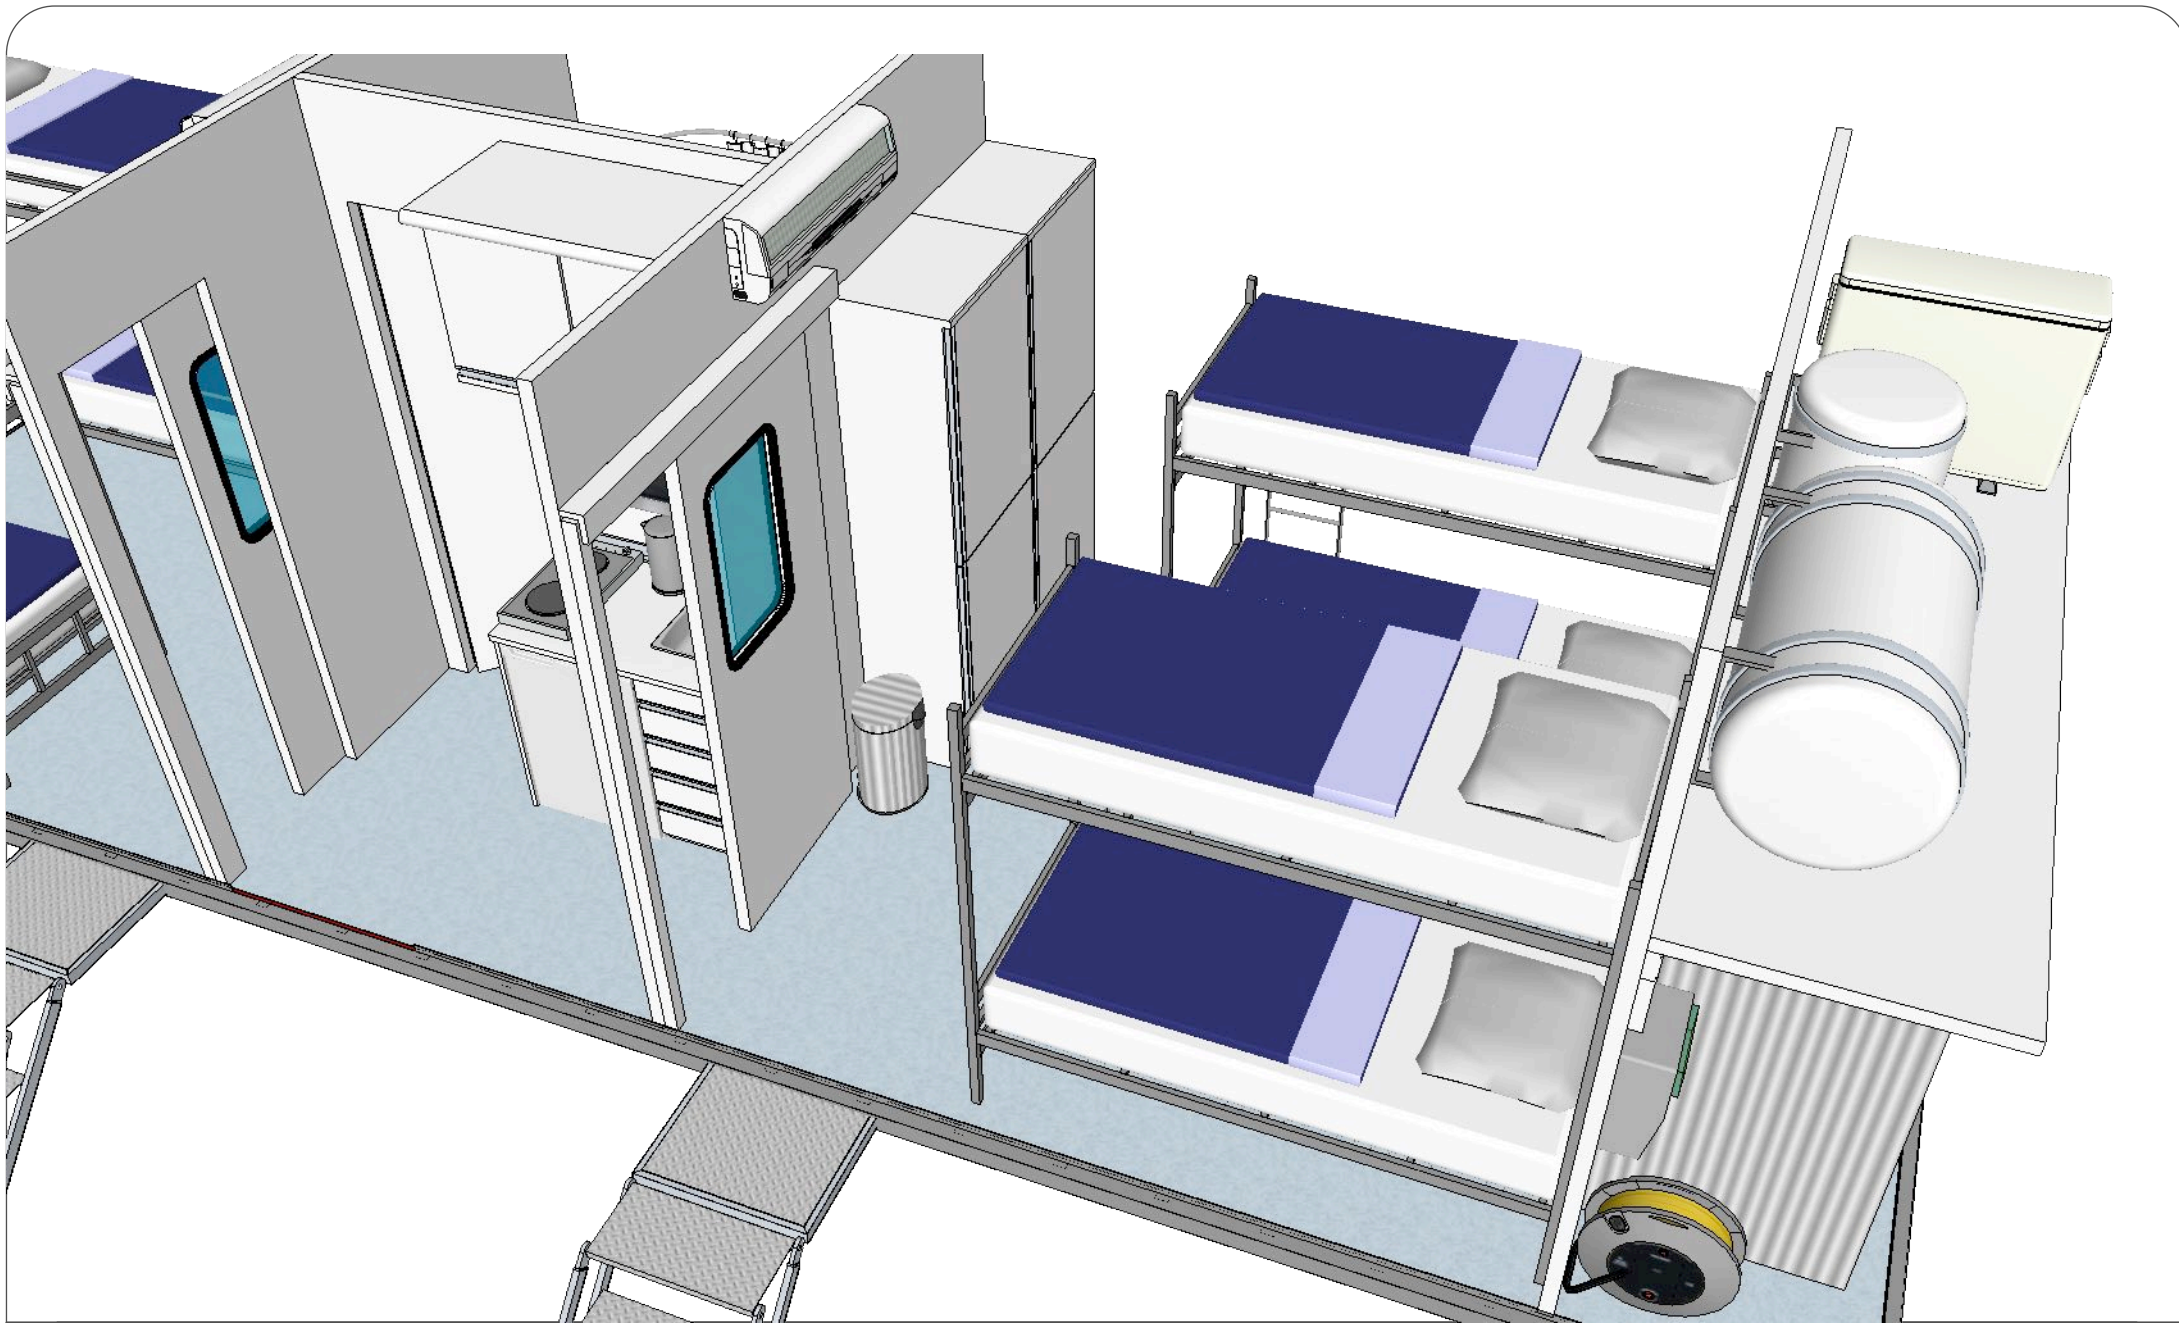

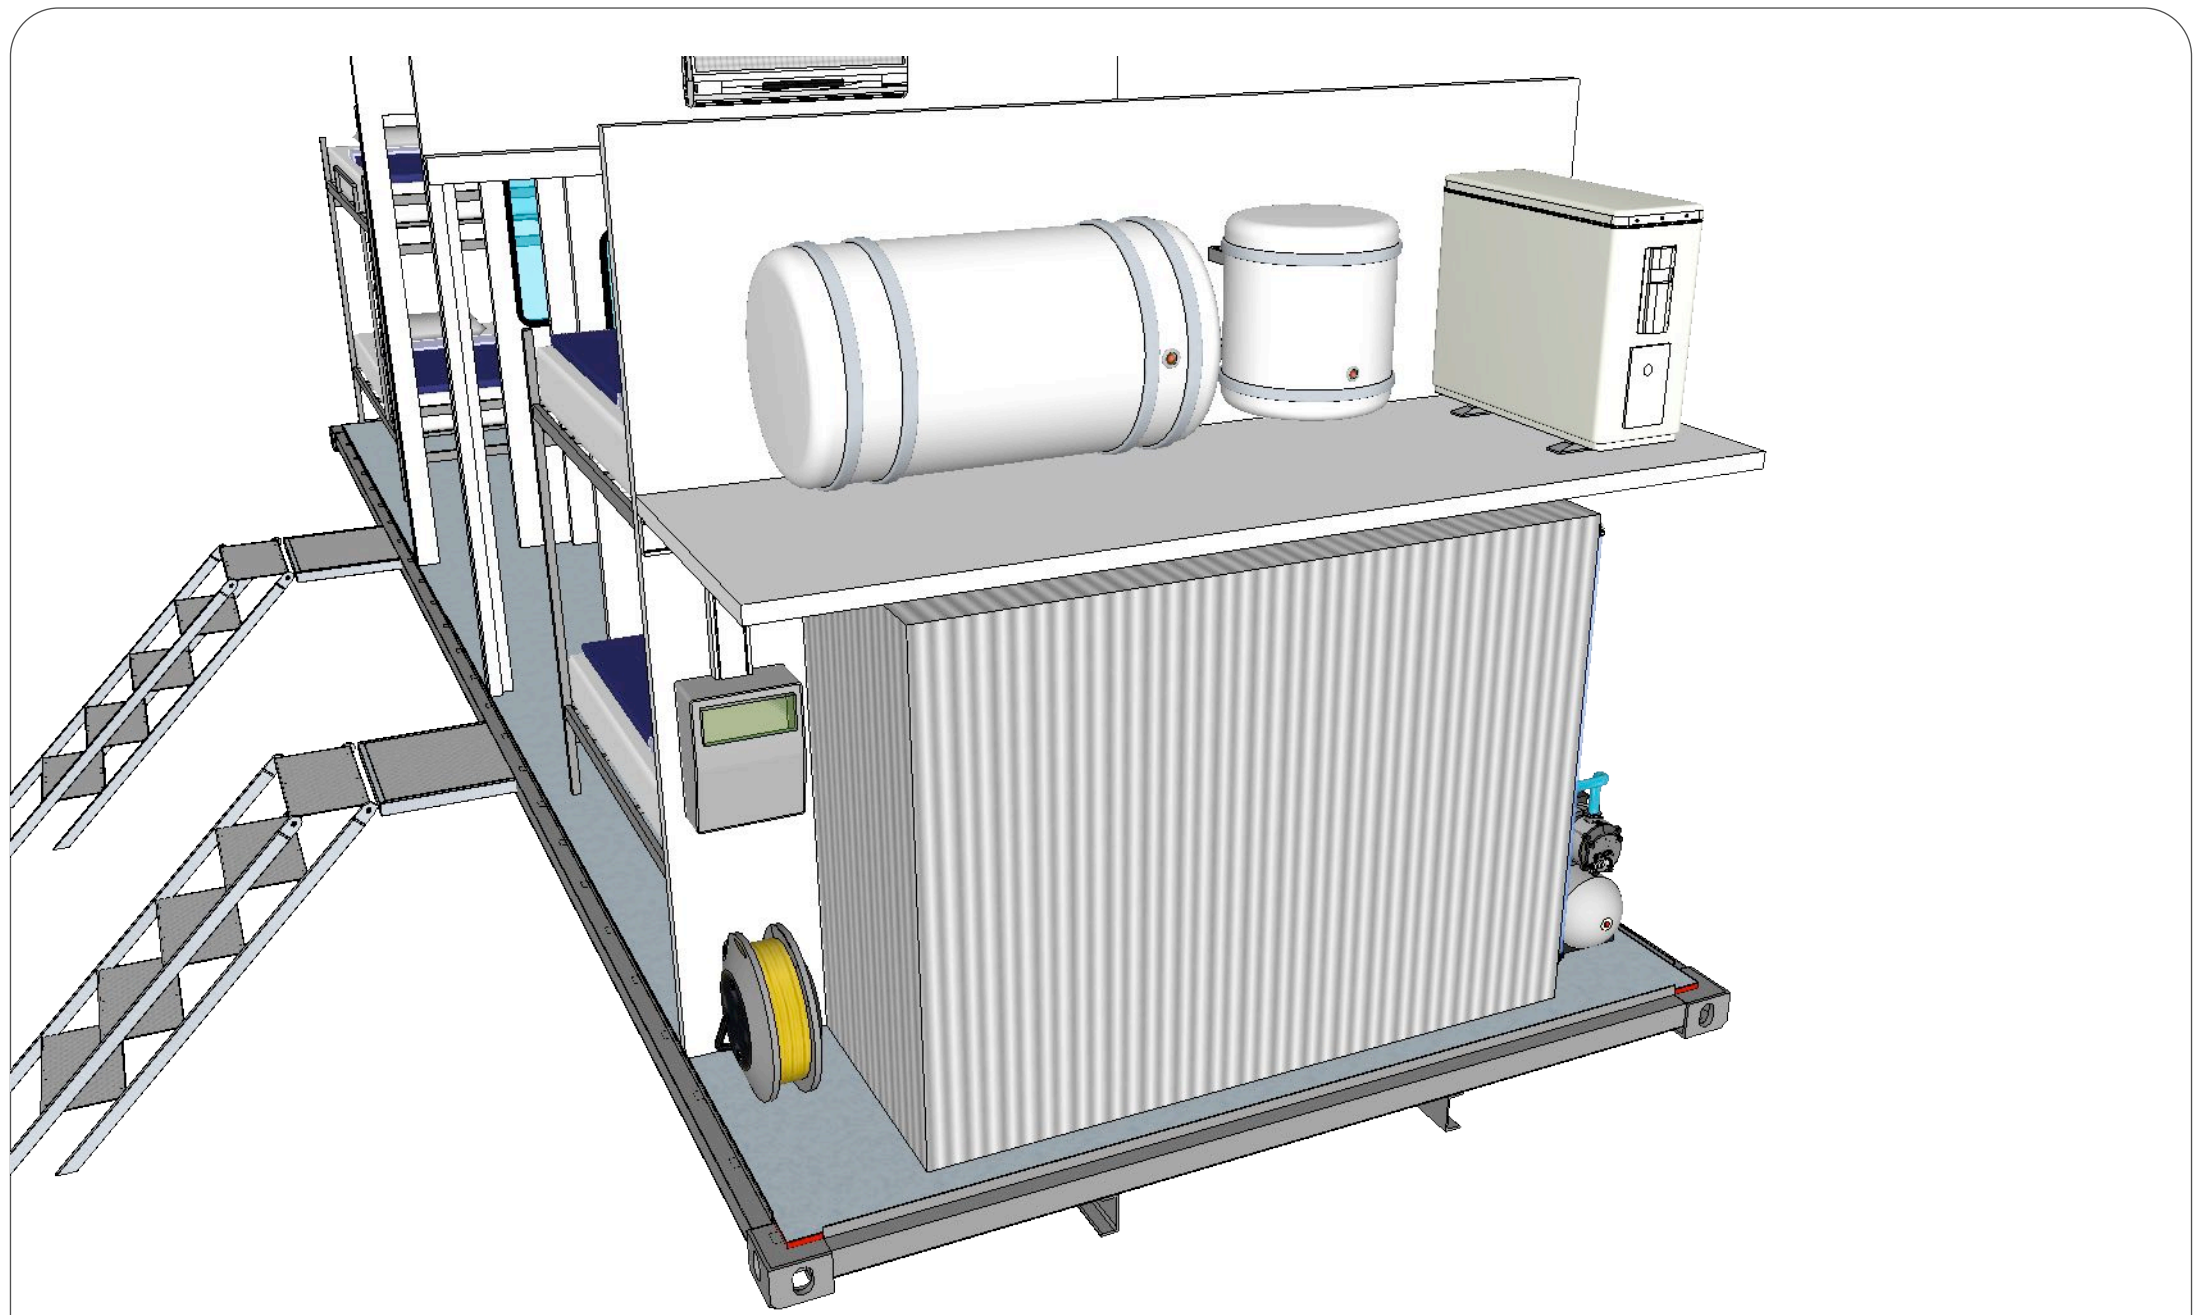

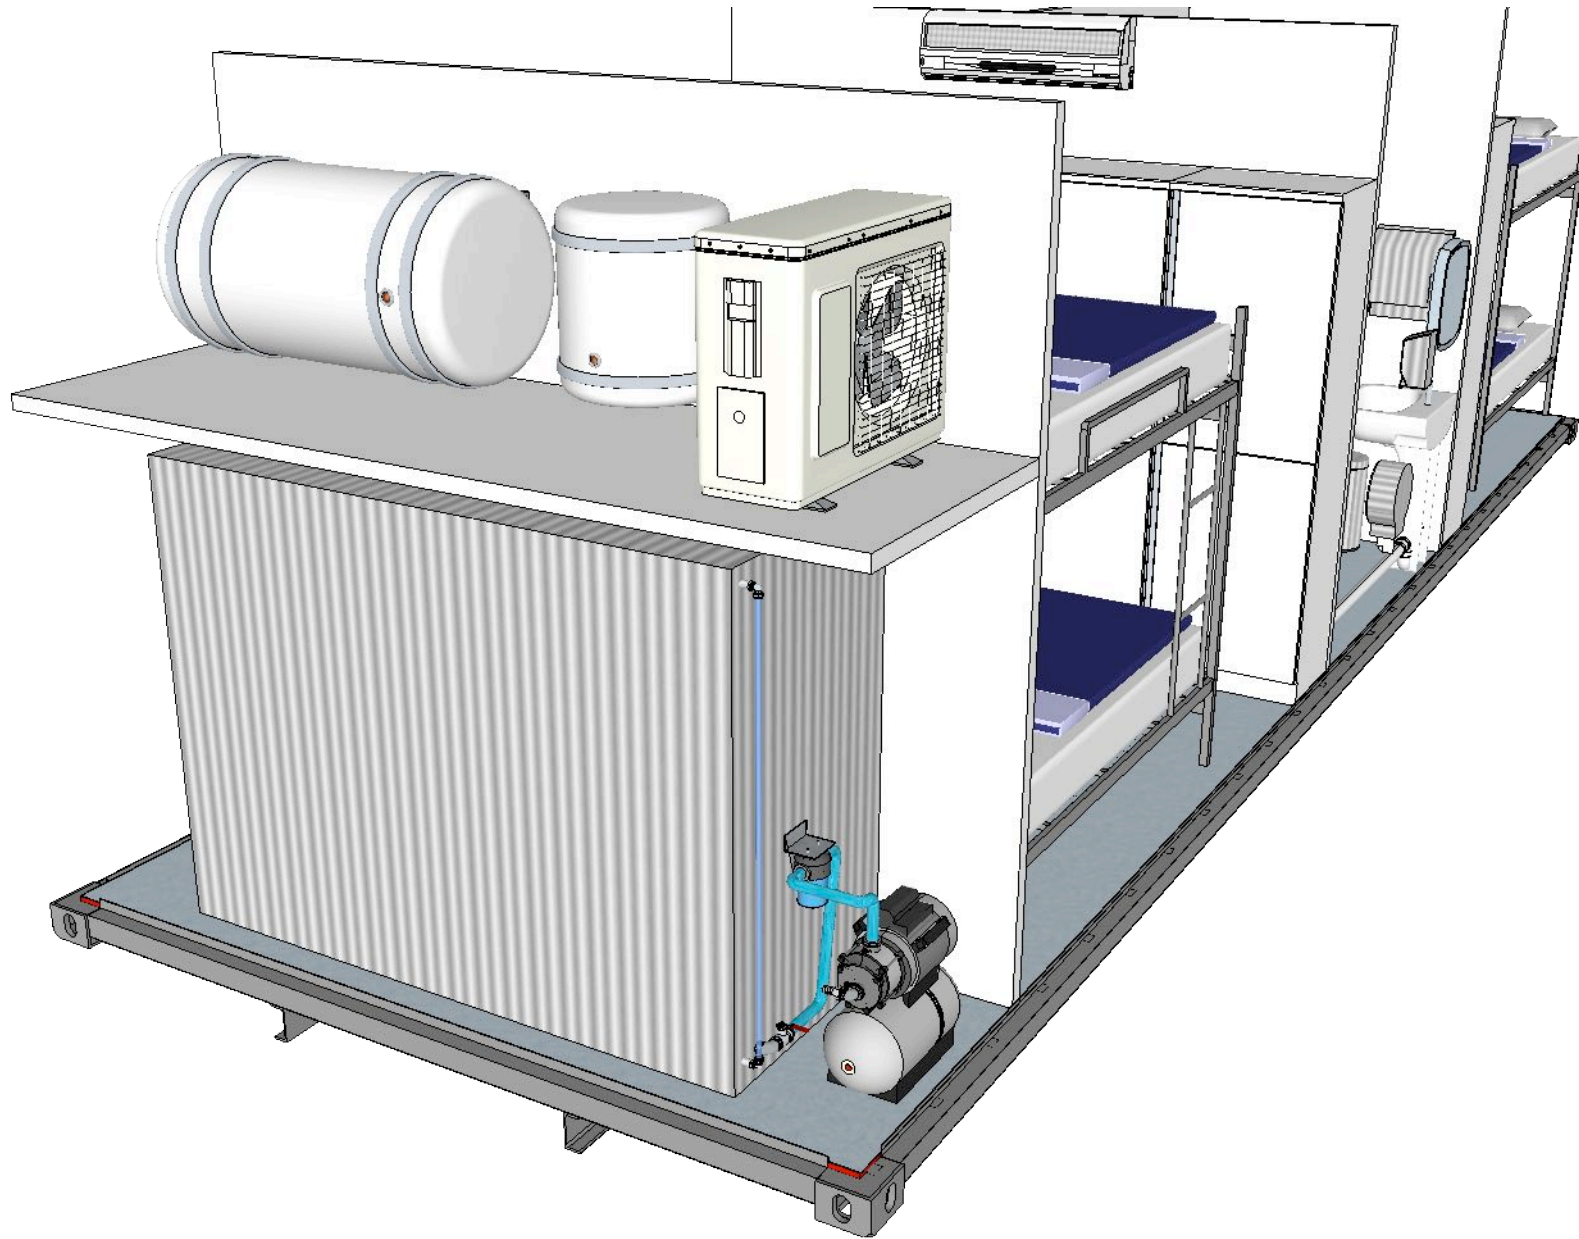


No	Equipment	Explanation	Orjin	Piece
1	Container Corner Connector		Ozsoy	1



Standard : ISO 1161
Size: 178*162*118mm;7.01*2.44*4.65 inch
Type : TL, TR, BL, BR; 1 set
Material : JIS SCW480 cast steel
Weight :11 kg/pc, 88 kg/set
Suitable body model where corner wedges are combined

Turkey

2	FRP sandwich panel. Side walls, Interior walls and ceiling		Teknopanel	57
---	---	--	------------	----

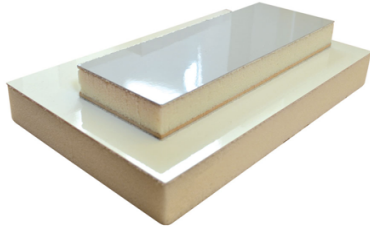


FRP + Plywood + Metal Profile + Polyurethane
Foam + FRP
FRP: 2 mm Ral : 9002
Plywood: 4mm
Metal Profile: 40x40x2mm
Polyurethane Foam: 40 mm
Sandwich Panel Thickness: 50 mm
It provides high resistance to impacts.
It can be easily applied with flexible and insulating materials.
It is rustproof and resistant to chemicals.
Heat resistant (low thermal conductivity coefficient)
It is easy to clean: it does not create dirt and odor, it is hygienic.
It provides excellent air conditioning.
Scope of application;
Wagons, Sports vehicles, Caravans and sightseeing vehicles, Ambulances.
FRP Specifications,
Transparent Strength: 500 N
Bending temperature under load: 1200 C
Water absorption: 0.3%
Surface hardness : 40
Tensile Strength: 150 Mpa

Turkey

m2

No	Equipment	Explanation	Orjin	Piece
3	Floor Materials		izocam	27



Heterogeneous PVC flooring

Total thickness : 2 mm
Thickness of wear layer: 0.85 mm
VHD foam sole
Water Proof

Mineto m2

Ozturk
Turkey

Serrated Plywood

Dimensions: 18x1.250x2.500 mm
Adhesive Type : WBP Phenol formaldehyde
Density: 700 kg/m3
Surface Film: Dark brown 240 gr/m2 non-slip surface



50x50x3 mm profile support traverses.

Mineral wool-based mattress

Thickness / Width / Length: 50 / 100 / 8000 mm.

R Value: 2.30 m2 k/W

Thermal insulation Value: 0.74 ID W/mK

Reaction to Fire Class: A1

Galvanized Sheet : 1 mm

Surface coating : Primer / Industrial paint



4	Ceiling Ventilation		MRS	4
---	----------------------------	--	-----	---



Top surface tempered glass
Emergency exit
Locking Lever
Aluminum Frame
Size 50x50 cm

Turkey

5	Exterior / Sliding / Bathroom Doors		Alura	5
---	--	--	-------	---



Frame : 1.5 mm stainless steel
Door Leaf: 1.5 mm stainless steel
Accessories Metal door handles, hinges, lock, key, hydraulic closer
Surfaces : FRP Sandwich Panel
Insulation Polyurethane : 40 mm
Accessories Stainless
Metal door handles, hinges, lock, Key, hydraulic closer
2 Exterior doors : 1000 x 2000 mm
2 Internal doors Sliding Door Dimensions: 700 x 2000 mm
1 Bathroom Door : 700 x 2000 mm
Door Hydraulic for Exterior : 80 kg

Kale
Turkey

No	Equipment	Explanation	Orjin	Piece
6	Windows		Alura	5



Profile Aluminum profiles
Glass Double glazing of 4mm + 12mm + 4mm
Accessories Window handles, 2 hinges, slide opening lock system.
Flyscreen Included
Fence Included
Blind included
Window Dimensions W1, 1000 x 800mm (Slide)
WC: W2, 600 x 400mm (Top Hinged)

Turkey

7	Folding ladder		Alura	3
---	-----------------------	--	-------	---



Folding metal ladder.
Dimensions: 600x300x1250mm
Sliding storage compartment.
30x30x2 mm metal profile
Steps: Galvanized non-slip surface. 2mm
Connections are bolted.
Acrylic paint.

Turkey

8	Kitchen Room		Simens	1
---	---------------------	--	--------	---



Under Counter Refrigerator

Total Net Volume: 137 lt.
Height : 82 cm.
Width: 54.8 cm.
Depth: 54.8 cm.

Kitchen Cabinet : 1 pc.

18 mm MDF Plate
Lids and Drawers.
Waterproof Top surface.



Wall type 1 pc. 50 Lt 2kw 220V : 1 pc.

Water capacity: 50 lt.
Electric Heater Capacity: 2 kW / 220 W
Maximum Temperature: 75 C



2 burner electric stove: 1 pc.





Arnell Built-in Inox Electric Cooker
2 Burner Electric Cooker
Easy to Clean Enamel Surface
Enamel Size 52x30 cm
Built-in Built-in Dimension 48x27



Electric Heater 1 pc.

Water Volume: 1.7 lt
Auto Power Off: Yes
Resistance : Hidden

Bandini
Arnell
Philips

No	Equipment	Explanation	Orjin	Piece
9	Microwave Oven		Simens	1
		Capacity : 23 Liters Key Feature: Programmable Product Dimensions: 3.39D x 4.89W x 2.75H meters	Germany	
10	Fist Aid Kit		Tomotar	1
		Product size: 32.2cm x 24.2cm x 12.2cm It is produced for workplaces such as workshops, factories, construction sites, power plants, base stations, manufacturing and processing facilities, offices and hotels. Our company has ISO 9001 and ISO 13485 quality certificates. First aid materials have CE and Biocidal documents.	Turkey	
11	Eye Wash Solution		Pulm	1
		Plum 4604 eyewash solution; 500mL It is used against simple foreign objects (dust, dirt, wood, sand, sawdust, metal, splinter, oil...).	Turkey	
12	Plumbing		Pimas	1
		Clean water installation Surface mounted, non-insulated, ppr pipe Waste water installation PVC pipe, gasketed connection Toilet Section will be higher than the floor Floor: To be waterproofed and properly sealed Wall : Waterproof and properly sealed	Turkey	

No	Equipment	Explanation	Orjin	Piece
13	Bathroom Area		Aqua	1



Shower Tray

Size : 90x90cm
 Height: 16cm
 It is made of acrylic.

Turkey



Shower curtain

Weight: 70 g/m² Length: 200cm Width:
 180cm
 Area: 3.60 m²
 Surface density: 70 g/m²



Shower Shelf

Main material: Stainless steel
 Shelf: Recycled plastic
 Width: 19 cm Depth: 19 cm Height: 58 cm



Toilet paper

Connection: Zinc, Chrome plated
 Width: 11 cm Height: 5 cm Length: 16 cm
 Weight: 0.32 kg



Towel Holder

Connection: Zinc, Chrome plated
 Pipe: Stainless steel
 Width: 13 cm Height: 5 cm Length: 21 cm
 Weight: 0.26 kg



Wall mounted soap dispenser

800ml cartridge

14	Faucets		Senpres	1
----	---------	--	---------	---



Sink battery

Chrome Plated
 Hot Cold Double Water Inlet
 Inputs : 3/8"

Turkey








Shower set





Overhead shower head
 Chrome shower pipe
 Chrome hand shower
 Soap dish
 Braided chrome hand shower hose
 Brass router
 Braided chrome connection hose





Shower Faucet Hot / Cold






Chrome Plated on Brass
 Shower Set or Hand Shower Outlet
 Faucet that you can use comfortably in your
 bathroom
 Ø40 Cartridge



No	Equipment	Explanation	Orjin	Piece
15	Closet		Turkuaz	1
		Output : Rear Output Cover : Yes Mounting : Floor Mounted Reservoir : Behind the Toilet Type : Ducted	Turkey	
16	Sink		Pandora	1
		Washbasin with Cabinet Material: Mdf Feature: Bottom module with 2 doors. Upper module: Consists of a cabinet with 2 shelves and a mirror door. Lower Module: Width: 45 cm Height: 55 cm Depth: 47 cm Upper Module: Width 45 cm Height 55 cm Depth 14.5 cm Base drain - With proper sealing, the base goes away.	Turkey	
17	Water Heater		Bandini	1
		Water capacity: 100 lt. Electric Heater Capacity: 2 kW / 220 W Working Pressure: 8 Bar Maximum Temperature: 75 C Galvanized inner tank P&T Valve	Italy	
18	Water Tank		Alura	1
		Stainless water tank 2 mm . Capacity: 2.000 ltr. Filling mouth. Flow and dump valve Water filter Fill indicator.	Turkey	
19	Whater Pump		Karcher	1
		Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Maximum leaving water : 35 °C"	Germany	

No	Equipment	Explanation	Orjin	Piece
20	Air Conditioning		Carier	1
		Cooling Capacity : 18.000 btu Current Cooling : 6.3 / 6.9 A Required Fuse : 7 A Thermostatic Heat Control Yes Refrigerant : R32 Indoor unit : 2 pcs.	Spain	
21	Electric line connection board.		Alura	1
		Control Panel. Electrical connection. To be Inside a closed box with key lock Main circuit breaker. Auxiliary circuit breaker for each room and external power source socket, Automatic change over to exchange power between different sources (main, Generator) Grounding Systems	Turkey	
22	Shower Ventilation		HRZ	4
		Wet area Ø100 mm ventilation outlet 97 m ³ /h air flow. Ideal for 6-7 m ² area. 220 W	Turkey	
23	Fire Extinguisher		Mert	2
		ABC Grade Fire Extinguishing Powder 6 Kg Capacity MAP Rate 40% Body made of A1 7114 Quality Plastered Sheet 18 Bar Working Pressure 0.70 Micron Electro Static Paint It Has a Refillable Structure.	Turkey	

No	Equipment	Explanation	Orjin	Piece
24	Extension Reel		Bemis	1
		<p>Voltage : 220V - 400V Amps :2 Units: 1/16A 1 Piece : 3/16A Pole : 2P+E Protection Class : IP44 Hertz: 50Hz - 60Hz Body Material: Aluminum Cable : 30 mt Cable Type: 5x2,5mm</p>	Turkey	
25	Smoke Detector		Lorex	4
		<p>Battery Smoke Detector It is the newest system device that draws attention with its small dimensions and aesthetic design feature. It has an audible alarm system and has a loud volume that wakes you up from 3m. It meets our needs with LED lights and hardware quality. It is a CE certified product that offers a safe use experience.</p>	Turkey	
26	Bunkbed		Kalander	4
		<p>Size : 900x1900x1700 mm Bed carriers 30x40x0,90 mm. Interconnections 20x20x0,70 mm. Heads 40x40x0,80 mm. Stairs with railing. Sheet thickness 0.70 mm. Electrostatic oven powder paint. Color is metallic gray. Each layer carries up to 80-90 kg.</p>	Turkey	
27	Locker Cabinet		Kalander	2
		<p>Width :1250mm Depth: 600mm Height:2000mm Board on frame : MDF, Plastic edge, Acrylic paint Base material:Steel, Nickel plated Plastic parts: Acetal plastic Steel, Epoxy/polyester powder coating</p>	Turkey	

No	Equipment	Explanation	Orjin	Piece
28	Cable Channel.		Mutlusan	1
		45x45 modules sockets and on-off switches 45mm faceplate opening. Material PVC, accessory material PC/ABS. Color:RAL9010. WxHxD: 80x50x2000 mm Mounting on the wall.	Turkey	
29	Interior Lighting (Kitchen+bath)		Eat	2
		Power : 40 W Input Voltage: 220 V / 50 - 60 Hz Output Voltage: DC 30-42 V Light power: 2640 lm.	Turkey	
30	Interior Lighting (Bedroom)		Eat	4
		Lighting Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Consumption Power: 28 W IP Value: IP65 Usage: Surface Mounted	Turkey	
31	Servis Lighting		Eat	1
		Led Luminaire: 40W Protection Class: IP65 Light Color : White Light Power: 6500K Length : 120Cm Waterproof	Turkey	
32	Outdoor Lighting		Eat	8
		30 Watts: 5800 Lumens Size: 120x130 mm Working life: 30,000 hours Standard: IP67 Waterproof	Turkey	