

8-3 x Oil
Reel
15 mt.


13-Waste
Oil
Reel
15 mt.

24-Diesel
Reel
15 mt.

19-Water
Reel
15 mt.

23-Diesel
Pump

15-Pressure
Washer
Machine

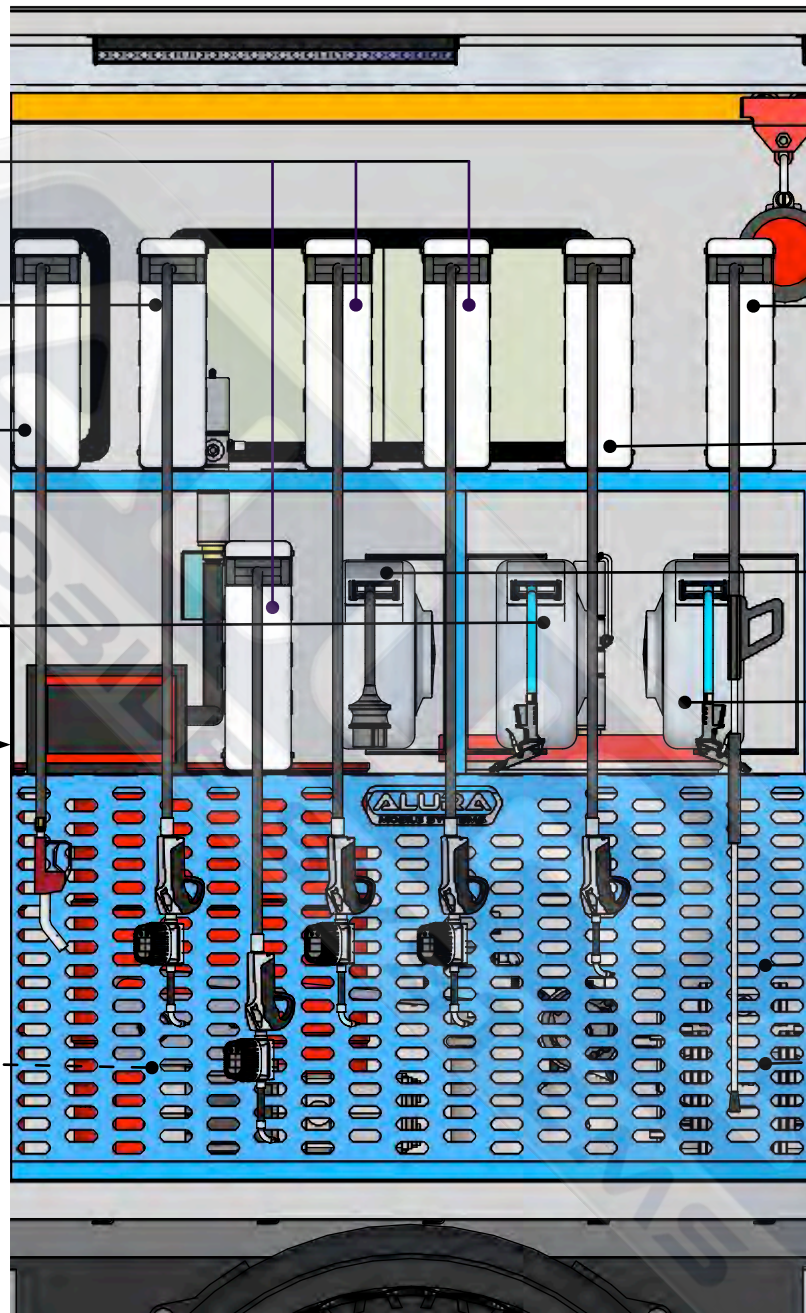

17-Pressure
Washer
Reel
15 mt.


11-Gressa
Reel
15 mt.


20-Electric
Reel
15 mt.

21-Air
Reel
15 mt.


18-Water
Pump


12-Diagram
Pump

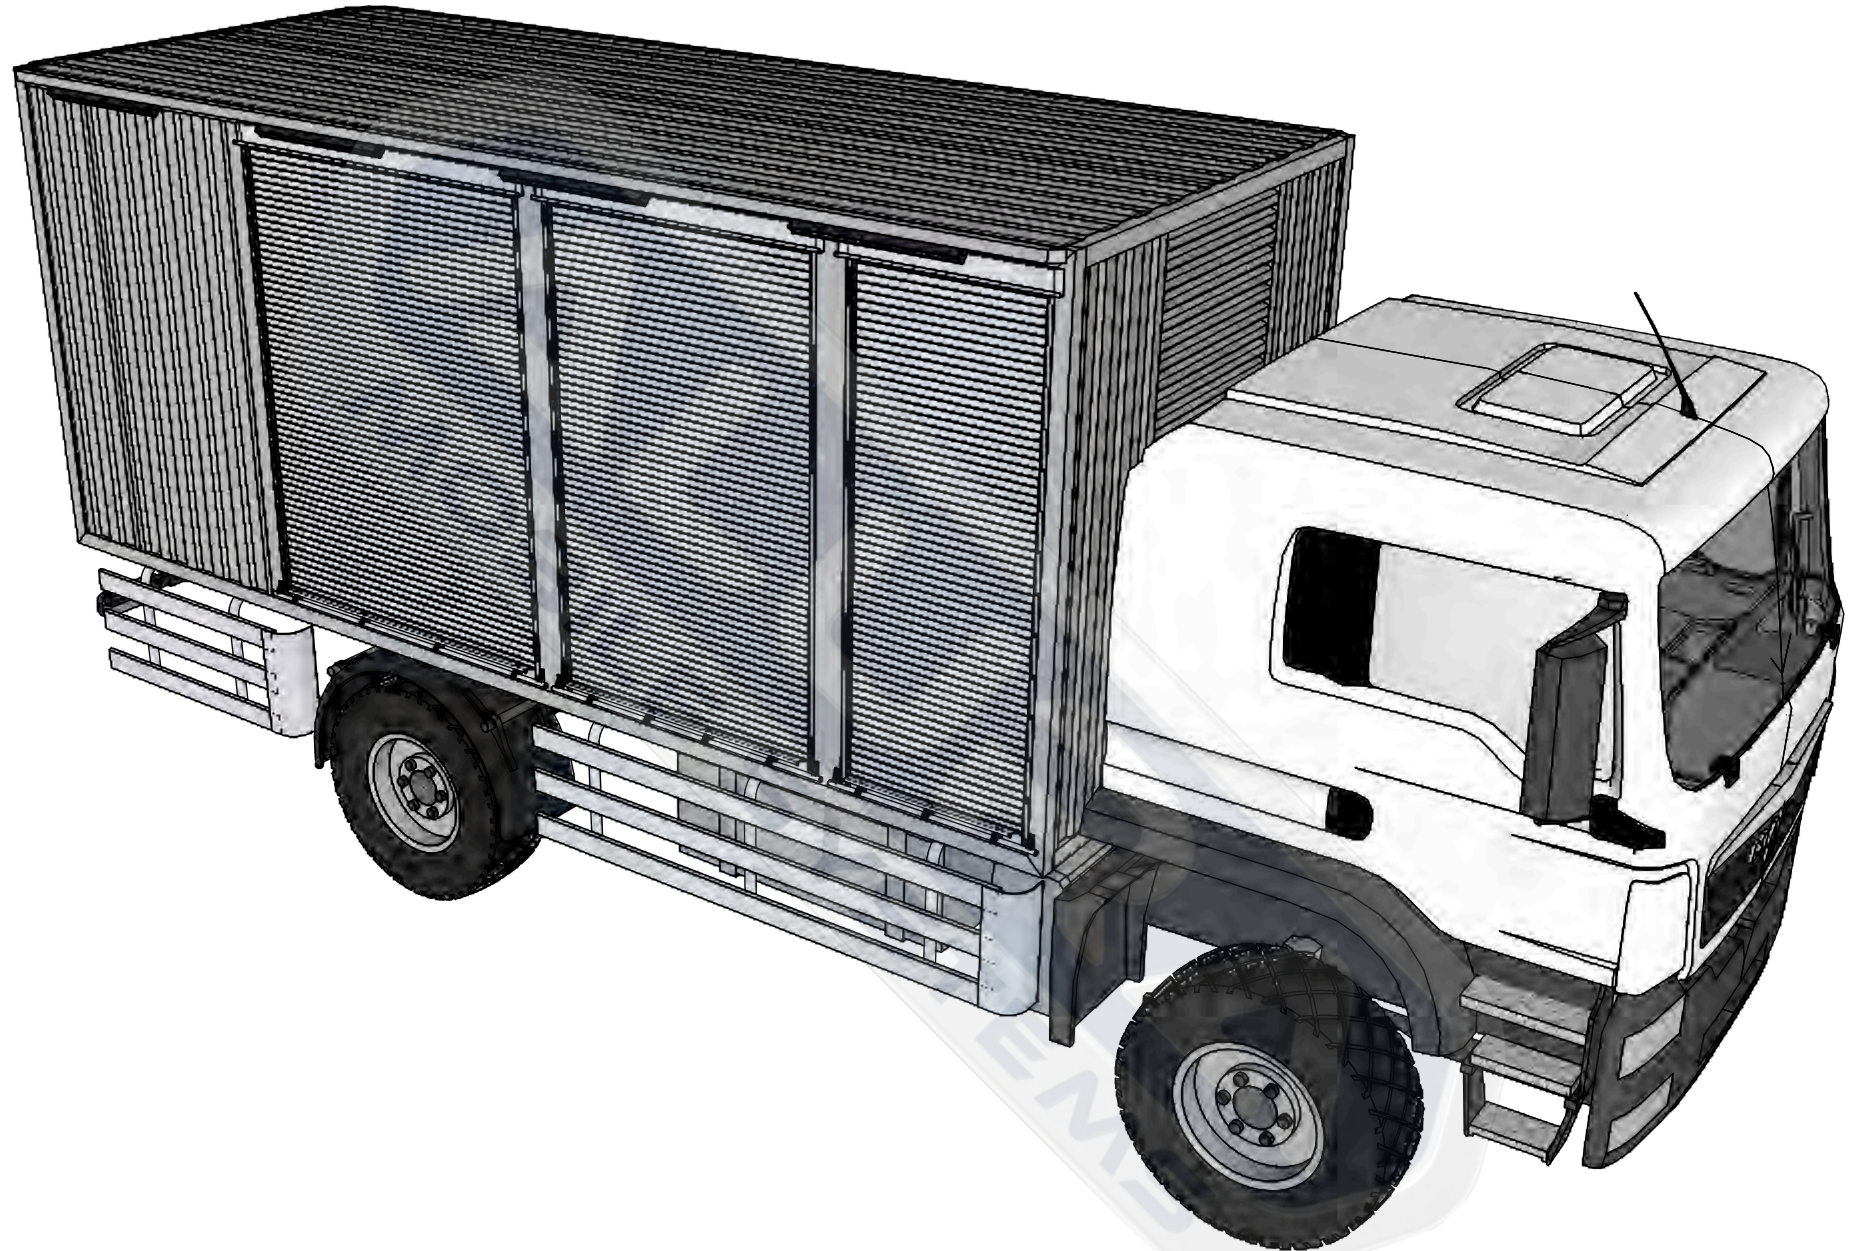


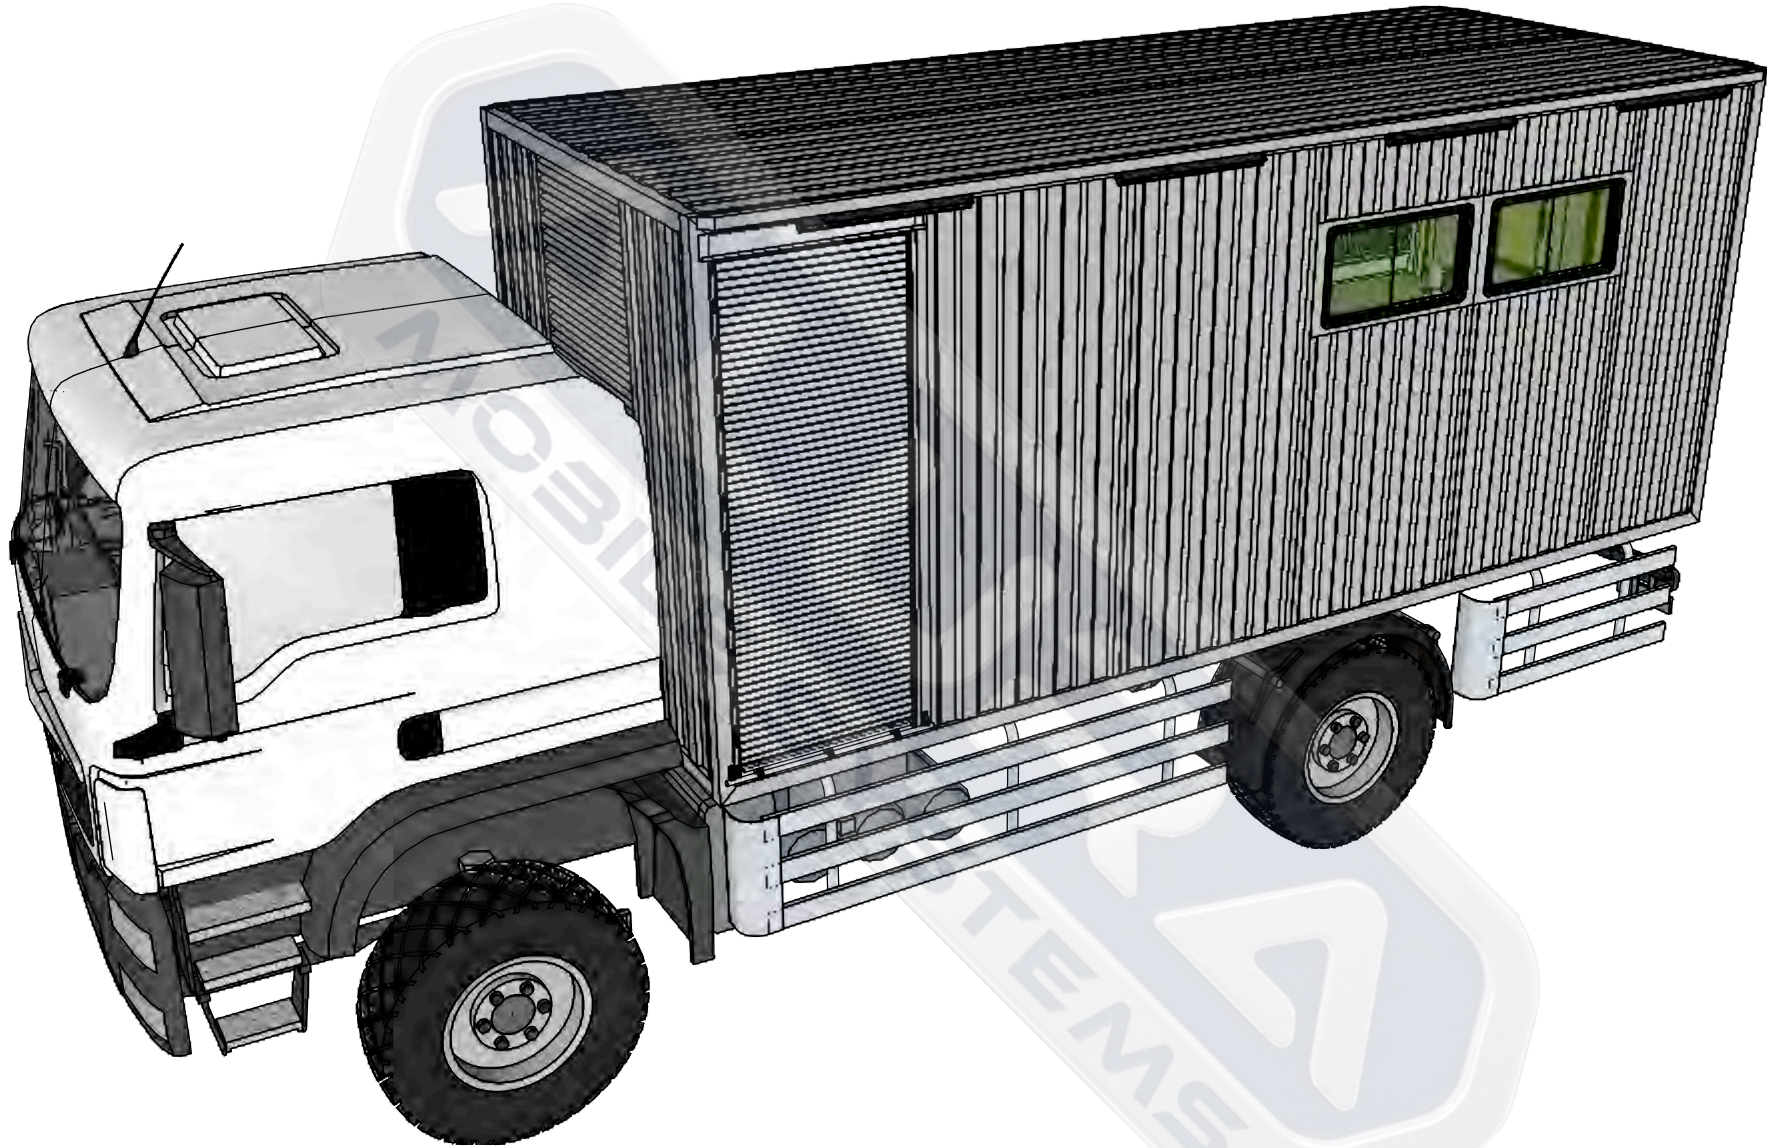





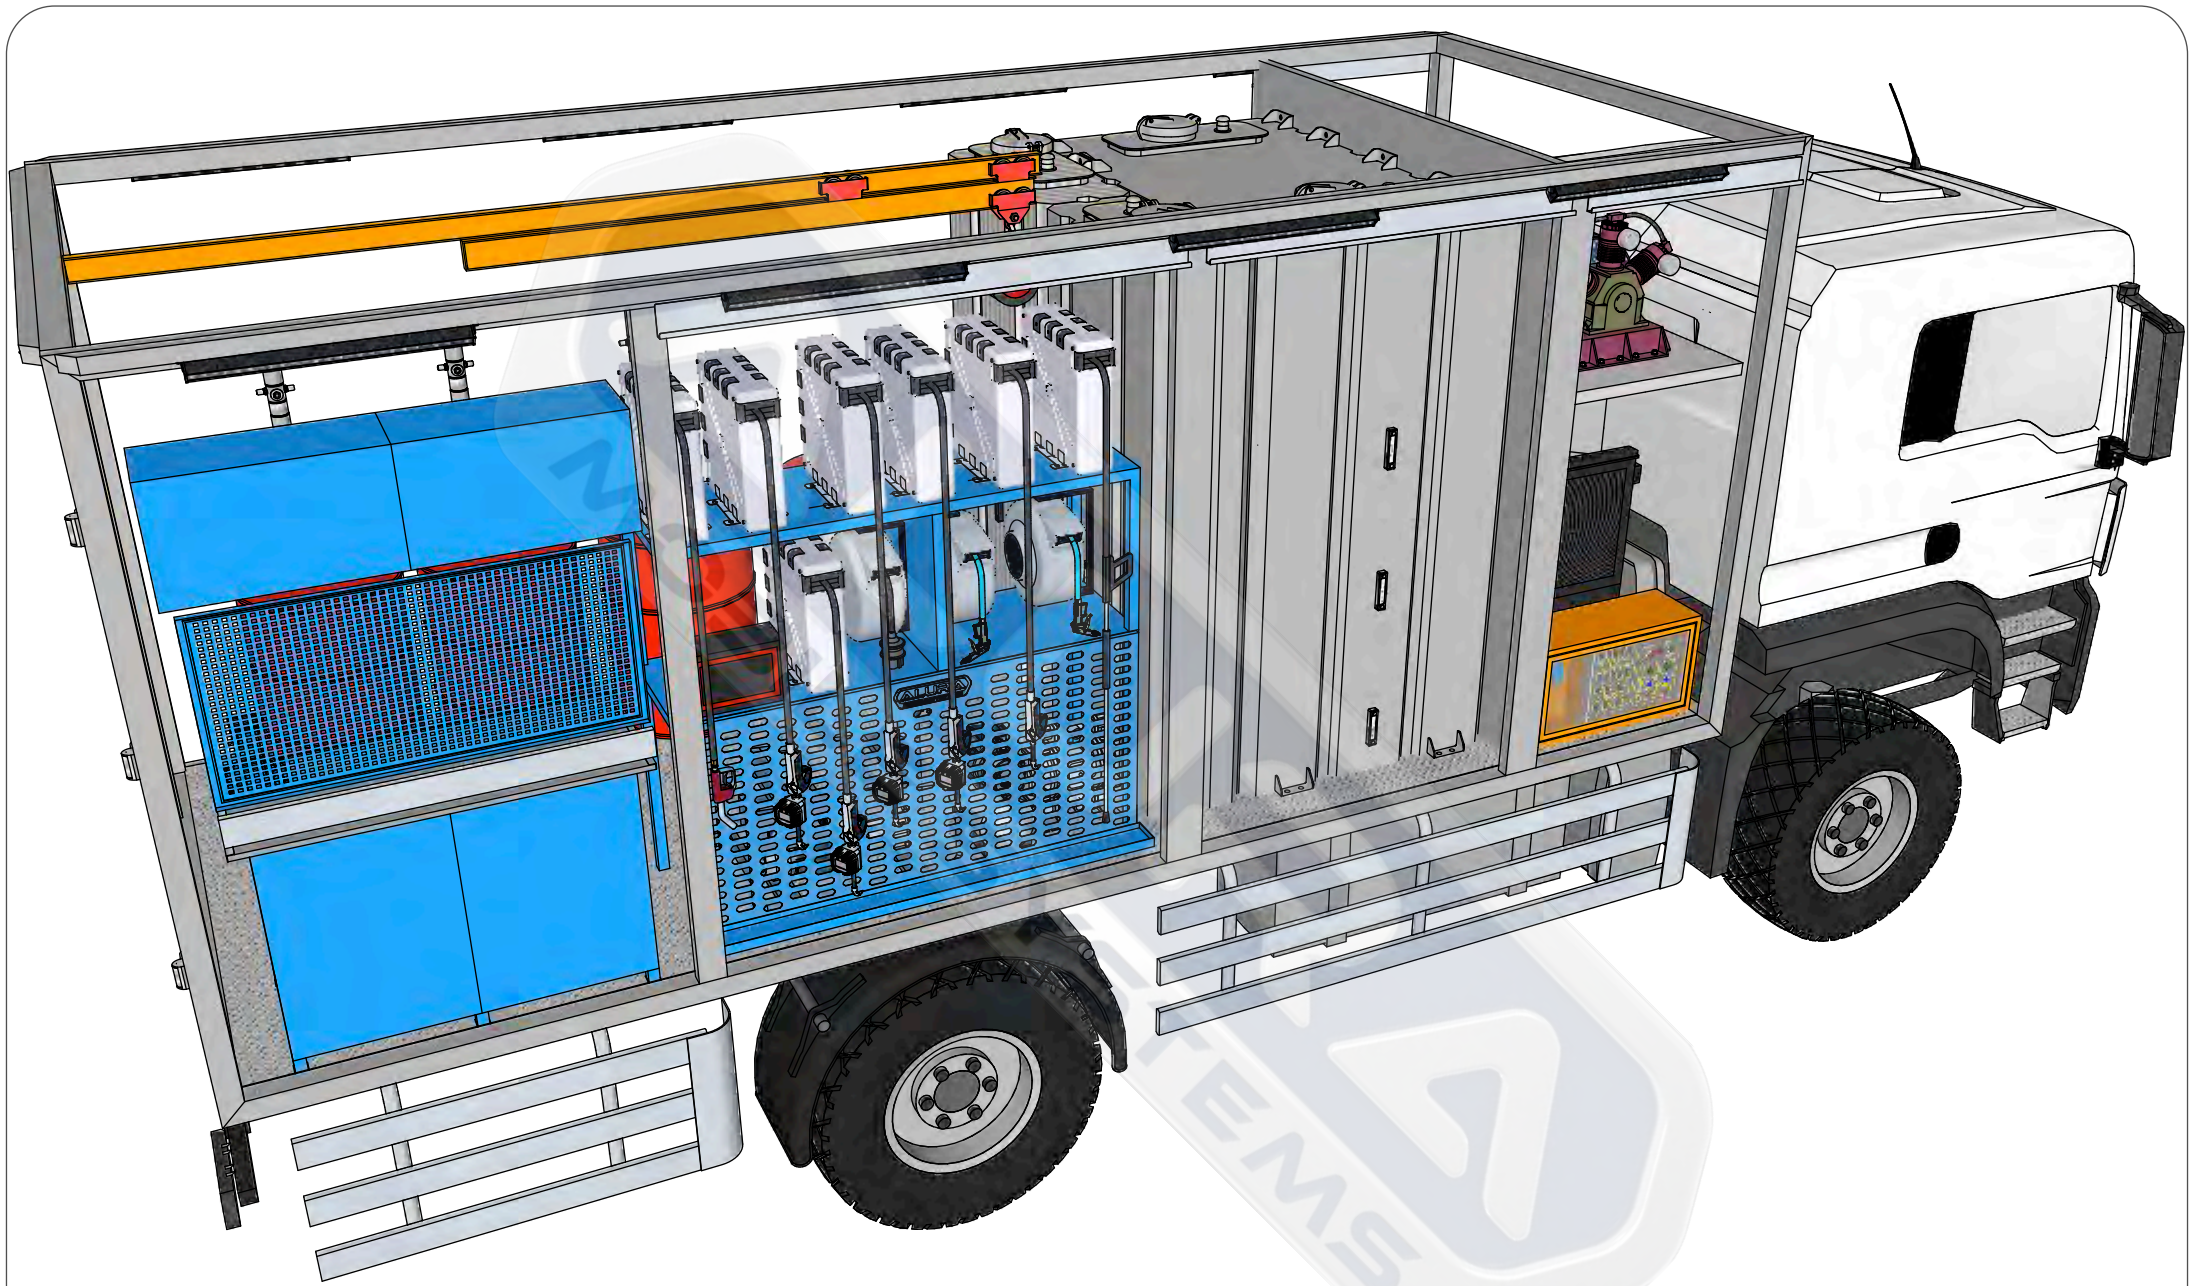

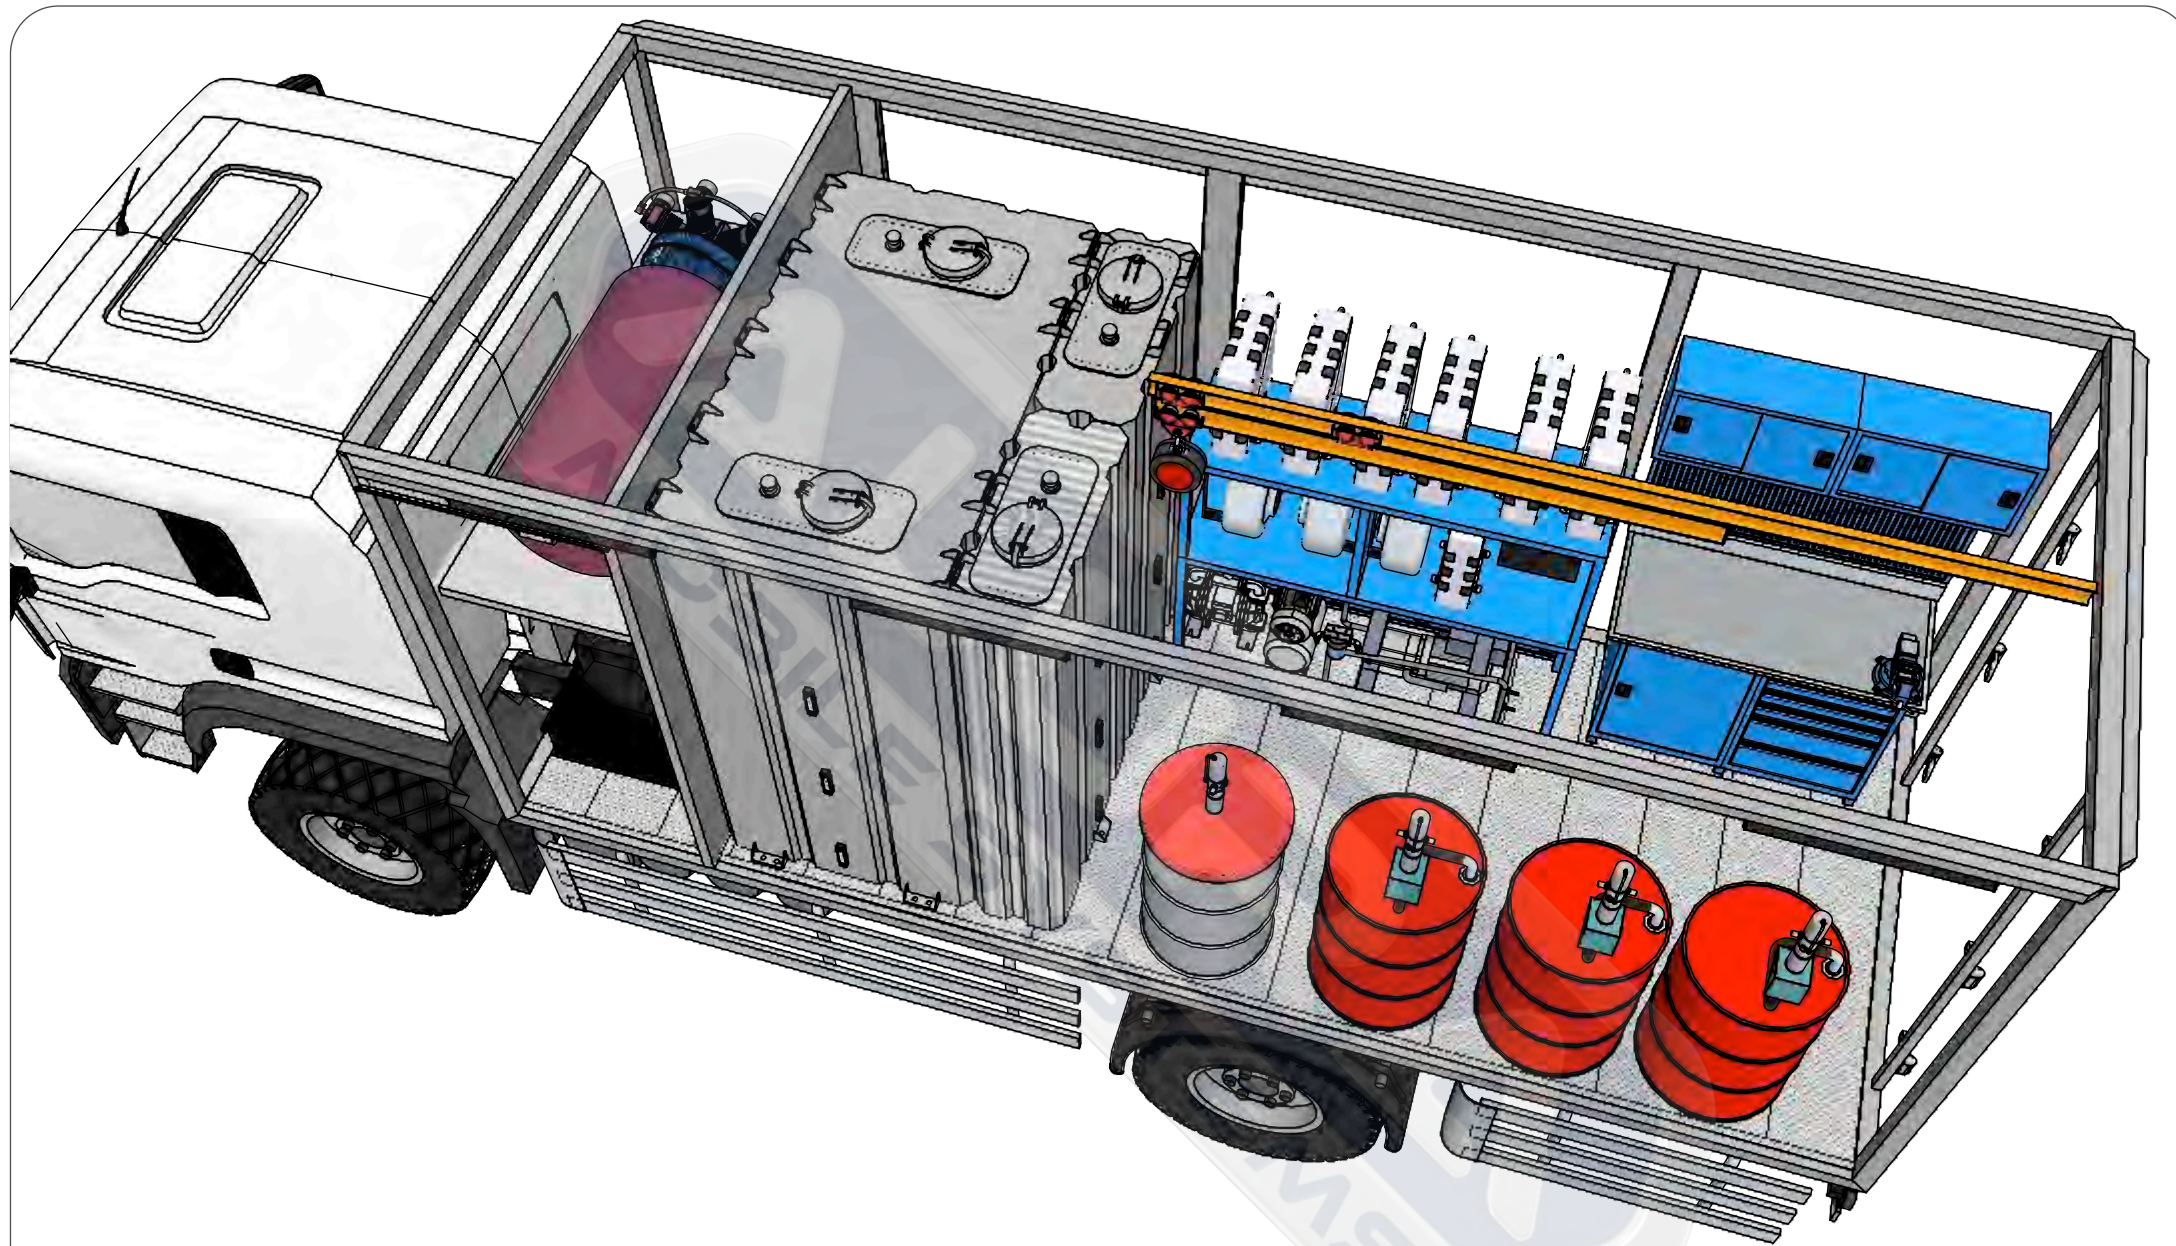

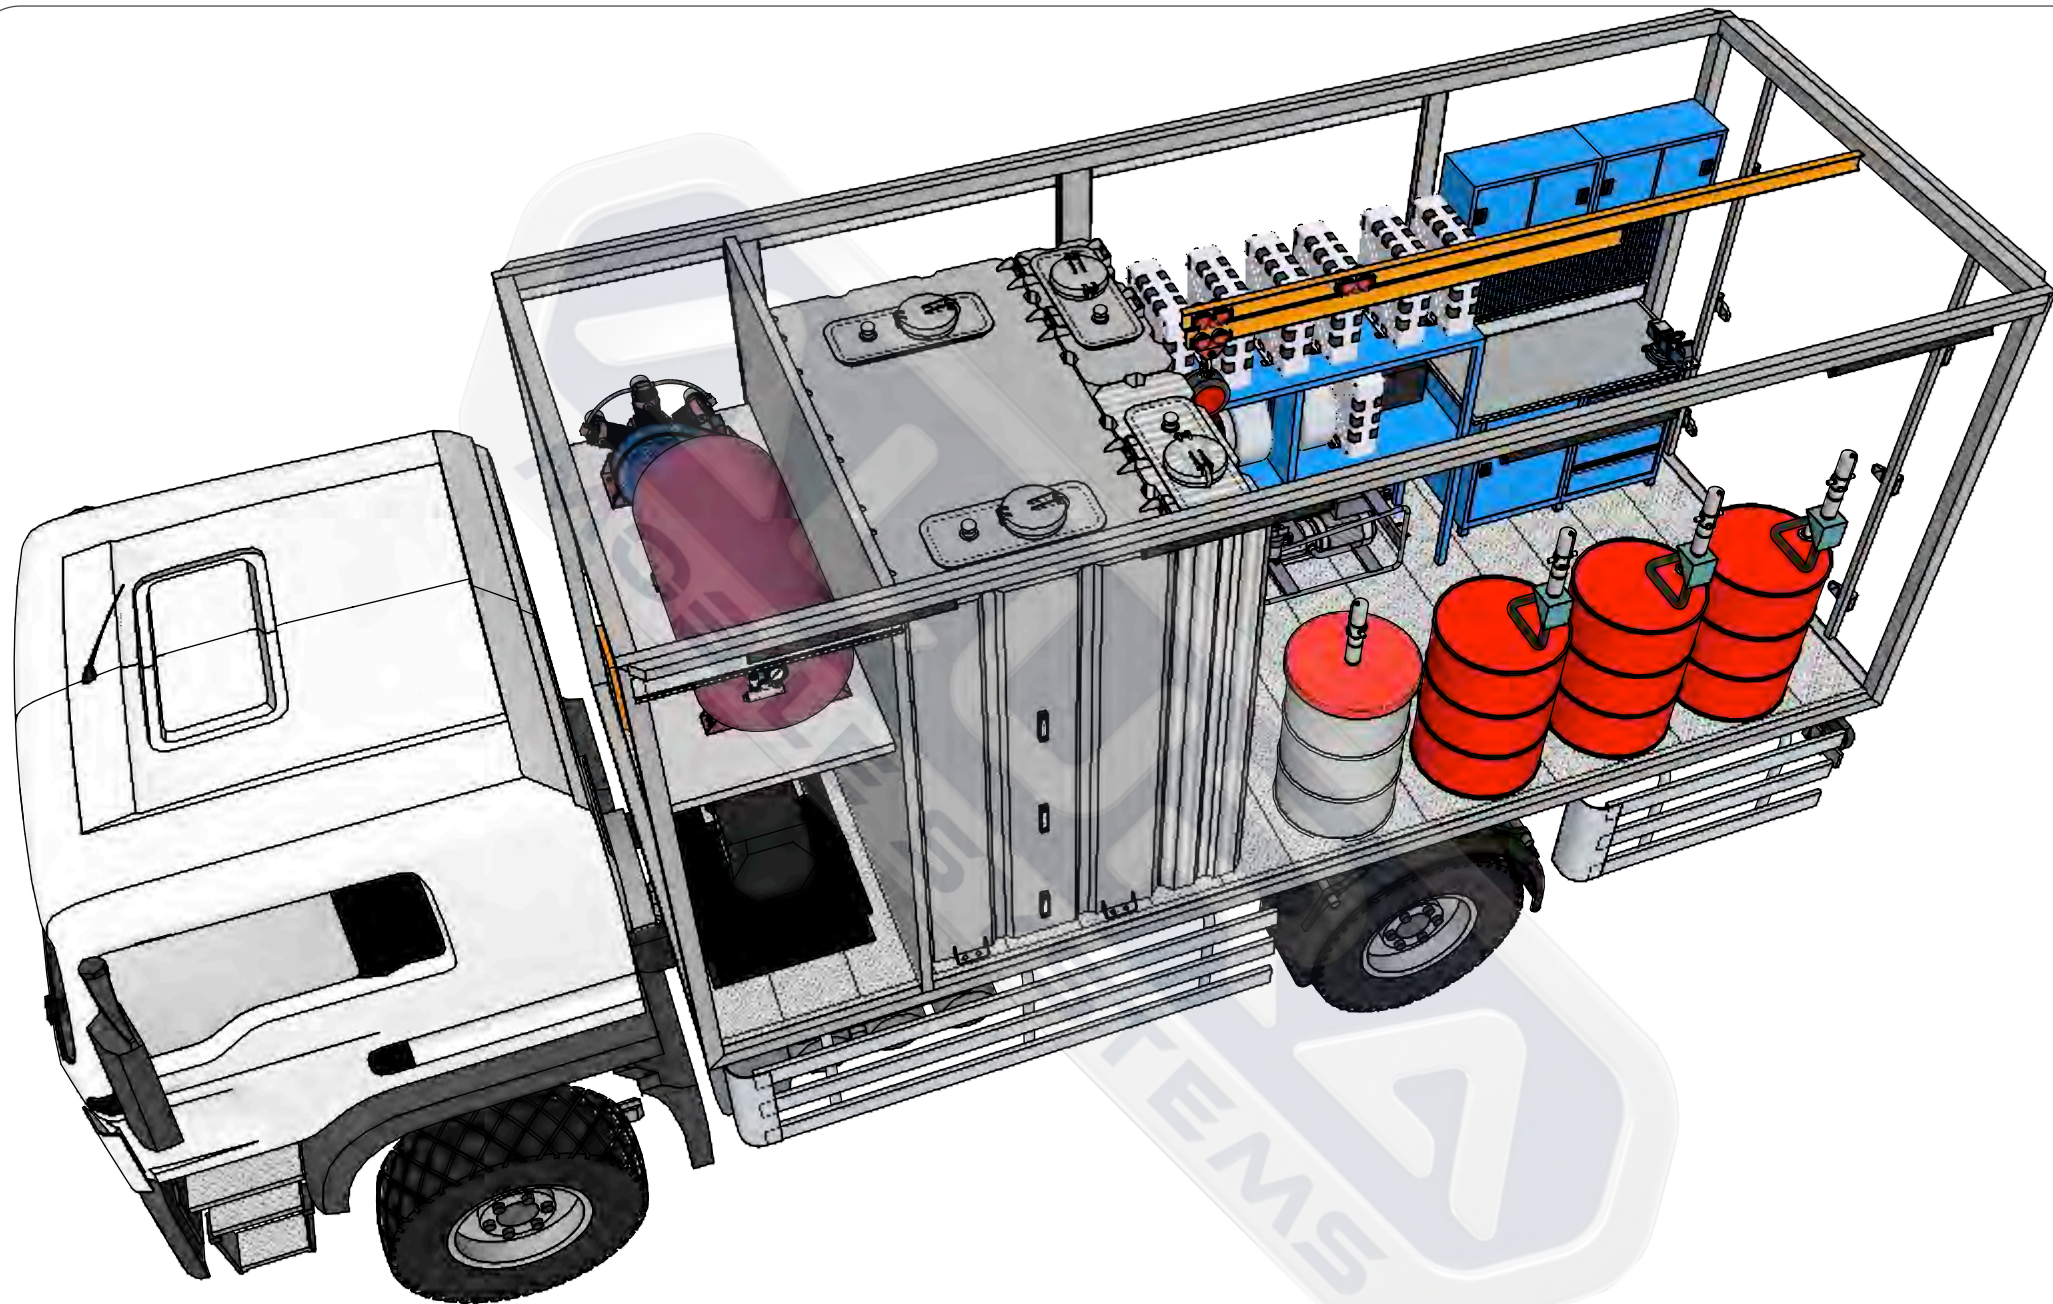


No	Equipment	Referans	Brand	Orijin	Piece
1	Lubrication Service	25.014	Alura	Turkey	1

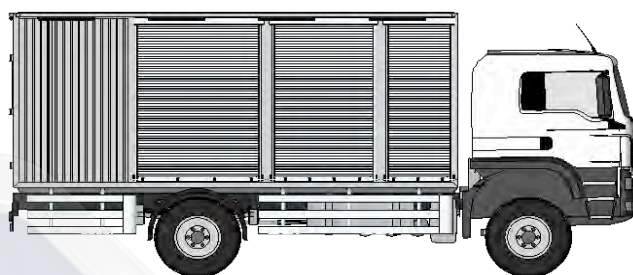

Dimensions / mm.	Length	6.000	Width	2.450	Height	2.550
------------------	--------	--------------	-------	--------------	--------	--------------

Bodywork

MWS bent C type channel steel.
 Column sheets 3 mm. Panels 2 mm.
 Base cross members 80mm height 3mm.
 Base 18 mm Plywood.
 Sliding windows to usable areas.
 Stainless hinges and locks.



Sliding glass rear door.
 Monolithic crane connection channel to the body frame.
 Acrylic industrial chassis paint.
 Quick access rear bumper drawers.
 Metal parts are fixed to the chassis.

Outer Covering


Polyurethane Industrial Coating
 Resistant to chemicals.
 Hygienic, mold-proof, rust-proof and corrosion-proof.
 Retains its elasticity between 40C/200 C.
 Fire resistant CLASS A certificate.



Solvent-free, superior water resistance.
 Prevents damage that may occur as a result of impact.
 CE certified.

Insulation

Elastomeric Rubber
 Edges, Ceiling 18/40 mm.
 Provides high performance thermal insulation with its low thermal conductivity structure.
 Has a high water vapor diffusion



Used in system solutions with high condensation risk.
 Increases energy amount.
 Protects against pressure fluctuations.
 Unaffected by mold and microorganisms, antimicrobial.

Control Panel







Center control panel.
 Generator and compressor areas are quickly accessible cover.
 Electrical cables are hidden inside the insulated chassis.
 Cables in protective plastic sheath.









Polyurethane hose in air line duct.
 Mains Electricity Connection Input.
 Perimeter and interior lighting 220v.







Finishing









No	Equipment	Reference	Brand	Orijin	Pcs	Picture	Specifications
2	Generator Diesel 28 / 25 kVa	FP25	Full Genset	Turkey	1		Prime: 28 kVa / 25 kVa Voltage: 400/230 V Phase : 3 Ph. Engine Bran: Cummins Engine Model: X2.5G2 Alternator: Stamford RPM: 1500 rpm.
3	Pistone Compressor 12 bar.	AC75EBM	AtlasCopco	Belgium	1		Engine Power: 5.5 hp Air Intake: 630 lt/min Revolution : 950 rpm Pressure : 12 bar Working Power : 380 V
4	Air Tank 300 lt.	ALR450/300	Alura	Turkey	1		Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Con. : 1" Air Outlet : 1/2"
5	Work Bench	ALR11180	Alura	Turkey	1		Work Bench Width: 1.500 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg.
6	Aluminum Shutters	CLK100230	Celiksan	Turkey	4		Manuel Working Locking Systems Size : 1000 x 2300 mm 2 pcs. 1500 x 2300 mm 1 pcs
7	Oil Pump	36060	Raasm	Italy	3		Pneumatic pumps for oil Flow rate: 18 l / min Air working pres.: 6/8 bar Av. air con.: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE

No	Equipment	Reference	Brand	Orijin	Pcs	Picture	Specifications
8	Oil Reel 15 mt.	9430.420	Raasm	Italy	3		Pressure: 150 bar Length: 15 mt Compatible fluids: Oils Material: Painted Steel Inlet-Outlet : G 1/2 - G 1/2 Pressure - Size:1/2 " 160 bar
9	Oil Gun	37758	Raasm	Italy	3		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes
10	Grease Lubrication Kit	64195	Raasm	Italy	1		Grease disp. kit Ratio: 50:1 Flow rate: 1500 g/min Av. air conmsp.: 330 l/min Noise level: 81 dB Weight: 4.6kg Grease guns
11	Grease Reel 15 mt.	995.518	Raasm	Italy	1		Pressure: 400 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel
12	Waste Oil Diagram Pump	33.2011TPT2	Raasm	Italy	1		Flow rate: 70 l / min Max pressure: 8 bar. Max cicles for min.: 400 cpm. Max working temp.: 100°C Noise level: 70 dB. Air working pressure: 2/6 Bar.
13	Waste Oil Hose Reels 15 mt.	9430.104	Raasm	Italy	1		Pressure: 20 bar Length: 15 mt Compatible fluids: Oils Material: Painted Steel Inlet-Outlet : G 1/2 - G 1/2"m Pressure-Size: 1/2"-160 bar"

No	Equipment	Reference	Brand	Orijin	Pcs	Picture	Specifications
14	Waste Tank 1.000 lt	ALR22500	Alura	Turkey	1		Volume: 500 Lt Metal prism tank Occupancy indicator Filler caps Pump stabilizer Discharge 1" valve
15	Washing Machine Cold	ST2100	Rottest	Turkey	1		Pressure: 200 bar Flow rate: 900 lt/hour Engine Power: 7.5 hp Voltage - Phase 380V-3 50 Hz Weight: 74 Spray gun
16	Washing Reel 15 mt.	995.518	Raasm	Italy	1		Pressure: 400 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel
17	Water Tank 1.000 lt.	ALR21500	Alura	Italy	1		Capacity : 500 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 1" Pump stabilizer : 1" Discharging valve : 1"
18	Water Pump	BP3.200	Karcher	Germany	1		Max. Motor power : 1000 W Max. Water Flow: 4500 l/H Max. Pressure: 50/5 m/bar Working Pattern: 1.9 - 3 bar Maximum Suction : 8 mt. Connection Type : G1 Weight : 14.7 kg.
19	Water Reel 15 mt.	880100	Mavel	Italy	1		Hose Length:20mt.10x15mm Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" Automatic Rewind Steel swivel wall bracket Size: 50x43.5x23.5 cm Weight: 8.3 Kg

No	Equipment	Reference	Brand	Orijin	Pcs	Picture	Specifications
20	Cable Reel 15 mt.	820722	Mavel	Italy	1		Three Phase : 400 Volt Cable Thickness: 5x2.5 mm Cable Len.: 20 Mt H07RN-F Power : 1000-3000 W Auto Rewind Size: 50x43.5x23.5 cm Weight: 8.3 Kg
21	Air Reel 15 mt.	880100	Mavel	Italy	1		Hose Length:20mt.10x15mm Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" Automatic Rewind Steel swivel wall bracket Size: 50x43.5x23.5 cm Weight: 8.3 Kg
22	Diesel Pump	Cube 70	Piusu	Italy	1		Flow rate: 50 lt/min Power: 230 VAC Suction distances: 50 mt. Pressing distances: 30 mt. Gun : Automatic fuel gun.
23	Diesel Reel 15 mt.	8540.603	Raasm	Italy	1		Pressure: 20 bar. Hose: 15 mt Compatible fluids: Diesel Seals: Polyurethane Material: Painted steel Inlet - Outlet: G 1"(f) - G 1"(f)
24	Diesel Tank 5.000 lt.	ALR225000	Alura	Turkey	1		Material: ST 37 Carbon Steel Capacity: 5,000 lt. Sheet Thickness: 4 mm Fuel Output: 1 inch Level indicator Manhole Covers: 600 mm
25	Outdoor Lighting	CSR24.800	CSR	Turkey	10		Operating : DC 24/15V 1.4A Light Source: 3W 12pcs LED LENS Feature: 25° LENS White:5000-7000K Physical Properties : Polycarbonate plastic black aluminum profile

No	Equipment	Reference	Brand	Orijin	Pcs	Picture	Specifications
26	Lighting	WT066C	Philips	Turkey	6		Watt: 19 W Light Flux: 1800 Lm Dim Feature: Fixed Driver Product Life: 25000 H Color Temperature: 4000K IP Protection Class: IP65
27	Air Regulator	OPT3042FRL	Osaka	Japan	1		Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temp.: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min
28	Pneumatic Water Trap	OPT-P1000	Osaka	Japan	1		Working Pres.: 1-70 kg/cm ² Max. Working: 400 lt/min Max. Pressure: 14 bar Fluid Temperature: 5-60° C Inlet Connection: 1/2" Moisture Separation: 96% Weight: 0.70 kg
28	Electric Crane 800 kg.	ATS600/1200	Atlas	Kore	1		Capacity: 600 / 1.200 kg Lifting height: 10 mt Lifting speed: 10/5 m / min Rope length: 20 mt Engine power: 930 W Voltage: 220-50 V / Hz
29	Fire Extinguisher	STR1806	Star	Turkey	3		ABC Grade Fire Ext. Powder 6 Kg Capacity MAP Rate 40% Body made of A1 7114 Quality Plastered Sheet 18 Bar Working Pressure 0.70 Mic.Elec. Static Paint
30	Clamp / Rotary Table 100 mm	20301000	Izeltas	Turkey	1		Special alloy steel Oven paint Jaw Width (mm): 100 w (mm): 125 H (mm): 120 L (mm): 308 Weight: 5200 Gr



No	Equipment	Reference	Brand	Orijin	Piece
1	Lubrication Service	25.014	Alura	Turkey	1
2	Generator Diesel 28 / 25 kVa	FP25	Full Genset	Turkey	1
3	Pistone Compressor 12 bar.	AC75EBM	AtlasCopco	Belgium	1
4	Air Tank 300 lt.	ALR450/300	Alura	Turkey	1
5	Work Bench	ALR11180	Alura	Turkey	1
6	Aluminum Shutters	CLK100230	Celiksan	Turkey	4
7	Oil Pump	36060	Raasm	Italy	3
8	Oil Reel 15 mt.	9430.420	Raasm	Italy	3
9	Oil Gun	37758	Raasm	Italy	3
10	Grease Lubrication Kit	64195	Raasm	Italy	1
11	Grease Reel15 mt.	995518	Raasm	Italy	1
12	Waste Oil Diagram Pump	33.2011TPT2	Raasm	Italy	1
13	Waste Oil Hose Reels 15 mt.	9430.104	Raasm	Italy	1
14	Waste Tank 1.000 lt	ALR22500	Alura	Turkey	1
15	Washing Machine Cold	ST2100	Rottest	Turkey	1
16	Washing Reel15 mt.	995.518	Raasm	Italy	1
17	Water Tank 1.000 lt.	ALR21500	Alura	Italy	1
18	Water Pump	BP3.200	Karcher	Germany	1
19	Water Reel 15 mt.	880100	Mavel	Italy	1
20	Cable Reel 15 mt.	820722	Mavel	Italy	1
21	Air Reel 15 mt.	880100	Mavel	Italy	1
22	Diesel Pump	Cube 70	Piusu	Italy	1
23	Diesel Reel 15 mt.	8540.603	Raasm	Italy	1
24	Diesel Tank 5.000 lt.	ALR225000	Alura	Turkey	1
25	OutdoorLighting	CSR24.800	CSR	Turkey	10
26	Lighting	WT066C	Philips	Turkey	6
27	Air Regulator	OPT3042FRL	Osaka	Japan	1
28	Electric Crane800 kg.	ATS600/1200	Atlas	Kore	1
29	Fire Extinguisher	STR1806	Star	Turkey	3
30	Clamp/ Rotary Table 100 mm	20301000	Izeltas	Turkey	1