




No	Equipment	Referans	Producer	Orjin	Piece
1	20 ft. NATO Container AMG	23.039	Alura	Turkey	1


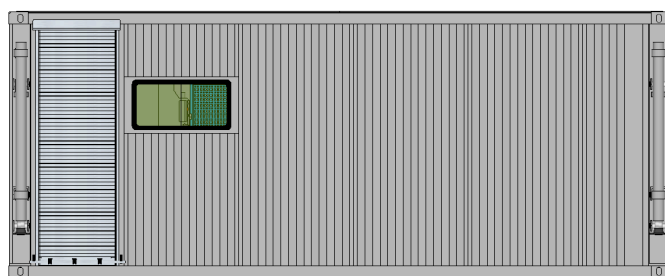


Dimensions / mm.	Length	6.058	Width	2.438	Height	2.591
------------------	--------	-------	-------	-------	--------	-------


Bodywork





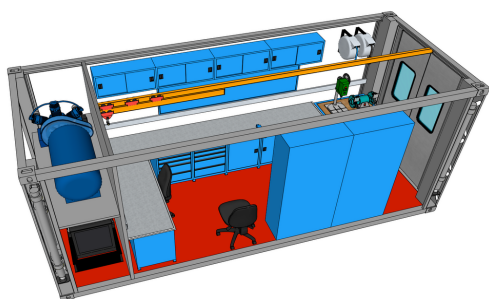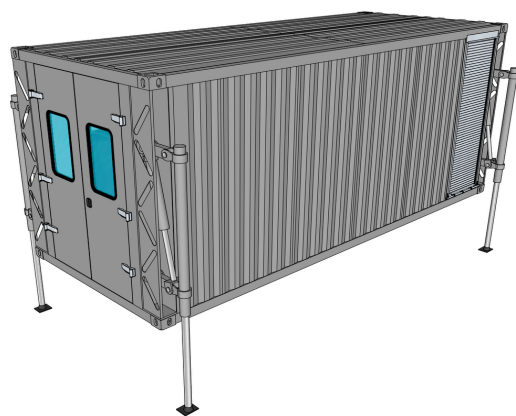



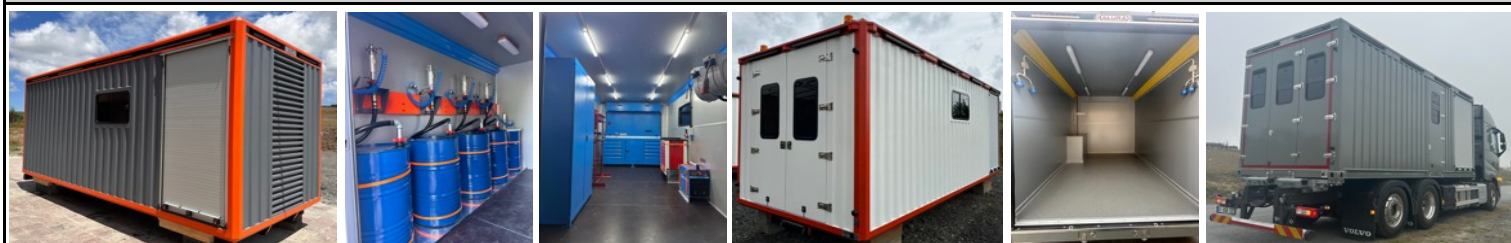





20' Dry / Standard Container
 From twisted C type channel steel.
 Base traverses 80mm height 3mm
 18 mm Elastomeric rubber insulation.
 Floor 18mm Plywood plywood.
 Sliding windows to usable areas.
 Generator and compressor areas are quickly accessible cover.
 Exhaust and ventilation device.
 Stainless hinges and locks.
 Outside transportation center control board.
 Electrical cables are hidden inside the insulated chassis.
 Outside transportation center control board.
 Electrical cables are hidden inside the insulated chassis.
 Quick access cover to the lubricating and washing rollers.
 Monolithic crane connection channel to the body frame.
 Environmental and interior lighting 220v.
 Acrylic industrial chassis and surface paint.
 Quick-access rear bumper drawers.
 Metal items are fixed to the chassis.
 Center control panel.
 Generator and compressor areas are quickly accessible cover.
 Cables in protective plastic sheath.
 Polyurethane hose in air line duct.
 Mains Electricity Connection Input.
 Perimeter and interior lighting 220 v.










Finishing














No	Equipment	Explanation	Producer	Orjin	Piece
2	Aluminum Shutters		Alura	Turkey	3
		Manuel Working Locking Systems Size : 1.000 x 2.300 mm 2 Pcs 2.000 x 2.300 mm 1 Pcs.			
3	Hydraulic Loading System.		Alura	Turkey	1
		Hydraulic lowering container lowering system. System power: 120 bar Working power: 220V Carrying capacity: 10 tons Control Panel			
4	Control Panel		Alura	Turkey	1
		Control of all machines. Lighting control. Compressor Pressure gauge.			
5	Grounding Reel		Mavel	Italy	1
		Cable Thickness: 1x6 mm. Cable Length: 15 Mt Cable Type: H07V - K Automatic Rewind Plastic outer casing steel swivel wall bracket	It can be easily stopped by the end user thanks to the latched stop device. CE approved Dimensions: 28 x 28 x 19 Cm Weight: 2.8 Kg		
6	Lighting		EAT	Turkey	6
		Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Power: 28 W / 38 W / 55 W Input Voltage: 220-240V - IP 65			
7	Ventilation		Al-Fan	Turkey	2
		Dimensions: 560 x 560 mm Wing: Galvanized Current: 220 V Motor: 0.34 hp.			







No	Equipment	Explanation	Producer	Orjin	Piece
8	Air Conditioning		Bosch	Germany	1
		Cooling Capacity : 12.000 btu/s Heating Capacity : 13.000 btu/s Energy efficiency class : A++ Cooling power in watts : 1213 Indoor Unit Sound Level : 40.5 db Outdoor Unit Sound Level : 56 db		Estimated room size : 16 m2 Refrigerant : R32 Dehumidification function : Yes Weight : 7.6 kg.	
9	Fire Extinguisher		Star	Turkey	2
		ABC Grade Fire Ext. Powder 12 Kg Capacity MAP Rate 40% Body made of A1 7114 Quality Plastered Sheet		18 Bar Working Pressure 0.70 Mic.Elec. Static Paint.	
10	Generator Diesel		Power	Turkey	1
		Standby/Prime Power: 22 kVa / 23 kVa Standard Voltage: 400/230 V / 3 Phase Engine Bran: Perkins Engine Model: 1103A-33TG1 Alternator: Sincron RPM: 1500 rpm.		Frequency: 50 Hz. Water Cooling	
11	Cable Roller		Mavel	Italy	1
		20 Mt 5*1.5 Mm Three Phase : 220 Volt Cable Thickness: 5*1.5 Mm2 Cable Length: 20 Mt Cable Type : H07RN-F Power : 1000-3000 W		Auto Rewind Plastic outer cover steel swivel wall bracket Weight: 9 Kg Dimensions: 42x39x23 Cm	
12	Work Bench		Alura	Turkey	2
		Work Bench Width: 1.800 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg.		Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Electrostatic powder paint Suspension boards modular	
13	Metal Cabinet		Alura	Turkey	2
		WxDxH: 1.000 x 450 x 2.000 mm Body and carriers 0.80 - 1.2 mm It is long-lasting and durable. The covers are double wing reinforced. Number of Shelves: 7 Pieces Shelf Carrying Cap .: 80 kg.		Variable drawer groups	







No	Equipment	Explanation	Producer	Orjin	Piece
14	Cabinet		Alura	Turkey	1
		Galvanized shelves and uprights. Width: 750 mm Depth: 600 mm Height: 2.000 mm Drawer: 5 pcs.			
15	Clamp		İzeltaş	Turkey	1
		Cast Body Leveler's Vise : 100 Mm Jaw Spacing : 100 mm Mouth Width: 125 Mm			
16	Pistone Compressor		Aykom	Turkey	1
		Chassis Piston Air Compressor Engine Power: 5.5 hp Air Intake: 630 lt/min Revolution : 950 rpm Pressure : 12 bar Working Power : 380 V			
17	Air Tank		Alura	Turkey	1
		Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Connection : 1" Air Outlet : 1/2"			
18	Air Reel		Mavel	İtaly	1
		Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dimension: 3/8" F - 3/8" M Automatic Rewind	Plastic outer casing steel swivel wall bracket It can be easily stopped by the end user thanks to the latched stop device. Size: 50x43.5x23.5 cm Weight: 8.3 Kg		
19	Crane		Atlas	Kore	1
		Capacity: 600 / 1.200 kg Lifting height: 10 mt Lifting speed: 10/5 m / min Rope length: 20 mt Engine power: 930 W Voltage: 220-50 V / Hz			



No	Equipment	Explanation	Producer	Orjin	Piece
20	Telescopic Ladder		KEP	Turkey	1
		9 Steps 2.6 Mt Maximum User Weight: 150kg High Quality Aluminum construction with Premium Aluminum Alloy makes this telescopic ladder much safer.			
21	Outdoor Lighting		CSR	Turkey	6
		Operating Voltage / Current: DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS	White:5000-7000K Physical Properties : Polycarbonate plastic black aluminum profile		
22	Multimeters		Uni-T	Italy	2
		Power: 1.5V battery (R03) x 4 Display: 61mm x 36mm Weight: 345g Dimensions: 189x89x53 mm Accessories: Batteries, test cable, k-type temperature probe			
23	Laptop		Dell	EU	1
		Processor : 11th Gen Intel® Core™ i5-1135G7 OS : Windows 11 Pro Graphics : 11th Gen Intel® Core™ i5-1135G7 Memory : 8 GB DDR4	Storage : 256 GB SSD Display : 14.0-in. display Full HD (1920X1080)		
24	Monitor		Philips	EU	1
		Brightness: 750 cd Purpose of Use: Professional Resolution: 3840 x 2160 Aspect Ratio: 16:9 Response Time 4 ms Refresh Rate : 144 Hz	Number of Colors 1.07 Billion Screen Size : 55 inch. Contrast Ratio : 4000:1 mnt		
25	Network Test Machine		Uni-T	Italy	1
		Connectors: RJ45 / RJ11 / BNC Quick check mode Low test mode Short circuit, cross connection, open circuit One key operation	Ethernet cable: shielded / unshielded test Auto shut-off function Low voltage detection Power supply 9V battery Model No : UT681C		

No	Equipment	Explanation	Producer	Orjin	Piece
26	Signal Generator 6GHz RF		Aim TTI TGR	England	1
		10MHz to 6000MHz Frequency Range 10Hz Stability, +/-1ppm Frequency Stability Lock to External Frequency Standard -110dBm to +7dBm Youth, 0.1dB Steps		Stores 15 gen. settings and 16 scan lists Convenient 2U half-rack that uses minimal bench space Full remote control via RS232, USB, LAN, and GPIB	
27	Power Supply 60 V		Aim TTI TGR	England	1
		Max Volts: 60 V Max Amps: 20 A PowerFlex Regulation High Current at Low Voltage Outputs 1		Total Power Up to 840 Watts Model No: CPX400S	
28	Copper Cable Tester		Fluke	England	1
		Qualifies residential cabling systems to support CATV, 10/100/1000 Ethernet, voice and VoIP. Tests and troubleshoots all coax, data, and voice wiring. Model No: CIQ-100		Graphically maps wiring configuration and shows distance to faults with built-in TDR. Locates and traces cables with IntelliTone™ digital signaling technology. Reduces installation costs by eliminating callbacks and disputes.	
29	Soldering Station		Weller	Taiwan	1
		Weller WHS 81 Analog Soldering Station (80 W) PU 81 Power Unit Temperature Range 150°C - 450°C Comes with WSP 80 Handpiece and WPH 80 Soldering Iron Stand		Uses LT Series Tips	
30	SMD Soldering Iron Station		Sunline	Taiwan	1
		Power Consumption: 750W Storage Temperature: 20~80°C Ambient Operating Tem.: 0~50°C Station Dimensions: 150x175x95 mm Station Weight: 2.95 kg Temperature Range: 200 ~480°C		High Efficiency Linear Torque-Speed Relationship High Torque-to-Volume Ratio Quiet Operation No Electrical Noise	
31	Oscilloscope 500 Mhz		Owon	Taiwan	1
		Number of Channels: 2 Bandwidth: 500 MHz Real-Time Sampling: 5 GS/s Memory Depth: 400 M Waveform Refresh Rate: 600,000 wfms/s		Vertical Resolution: 8 bits Timebase Range: 500 ps/div – 1000 s/div Trigger Types: Edge, video, pulse, slope, timeout, window, Nth edge, logic, UART, I2C, SPI, CAN Protocol Decoding: RS232, I2C, SPI, CAN	

No	Equipment	Explanation	Producer	Orjin	Piece
32	Fiber Optic Power Meter		Unit	Italy	1
		Measuring Range: -50 ~ 26 dBm Wavelength Range: 800-1700 nm Detector Type: InGaAs Calibrated Wavel.: 850/1650 nm. Display Resolution: Linear: 0.1%, Logarithmic: 0.01 dBm	Automatic Power-Off (min): 10 Power Supply: 1. 5V AA alkaline battery Low Battery Indicator: Low battery indicator approximately 3.3V, automatic power-off approximately 3V Model No : UT692G		
33	Power Sensor		Keysight	USA	1
		Frequency range: 50MHz to 6GHz Bandwidth: 1.5MHz Meas.type: Peak and average power Power range: -60dBm to +20dBm Maximum power input: +23dBm Dynamic range: 83dB	Accuracy: ±0.21dB Connector type: N-type VSWR: <1.5:1 Temperature range: 0°C to 55°C Power supply: 15VDC to 24VDC		
34	Optical Fiber Tester		Uni-T	Italy	1
		Optical Fiber Length Range: 2~3km Infrared Wavelength: 650±10nm Optical Fiber Adapter: 2.5 mm FC Battery Type: 3.7V 1050mAh polymer lithium battery Laser Mode: Cont. mode/Pulse mode	Charging Voltage and Current: DC 5V, < 1A Key Press Test: > 5000 times Drop Test: 1m Power: 1050mAh rechargeable battery Net Weight: 62g Size: 130x38x27 mm		
35	Spectrum Analyzer		Anritsu	Japan	1
		Frequency Range: 9 kHz to 13 GHz Dynamic Range: >106 dB in 1 Hz bandwidth at 2.4 GHz Input Atten.: 0 to 65 dB in 5 dB steps Amplitude Accuracy : ±0.5 dB typical Frequency Ac.:Aging: ± 1.0 ppm/10 yrs.	Accuracy: ± 0.3 ppm (25 °C ± 25°C) + aging -164 dBm/Hz (typ.) (1 GHz, preamp ON) Model No : MS2720T-0713		
36	Solder Cleaning Wire		Pros	Korea	2
		Series ZD 180 Thickness: 3 mm Length: 1.5 meters			
37	Solder wire		Pros	Korea	2
		Solder Wire Proskit solder wire It is a soldering wire developed for practical uses. Contains 63% SN. Weight: 17g, Wire diameter: 1.0 mm			

No	Equipment	Explanation	Producer	Orjin	Piece
38	Desoldering Pump		Goot	Korea	2
		Antistatic Desoldering Pump Length: 190mm Diameter: 14mm Comes with cleaning spindle. Teflon tip is replaceable Anti-static model.			
39	Soldering Aid Pliers.		Cnanrnanc	Korea	2
		Material: Carbon steel. Color: Red + black. Length: 24.6cm Brazing of steel tools Holds 2 wires Welding aid pliers			
40	Solder Bag		Yayke	Turkey	2
		Durable outer surface suitable for professional use Strong metal locks 3 compartment removable organizer Replaceable internal separation W / L / H : 480 x 398 x 180 mm			
41	Screwdriver		Izeltas	Turkey	4
		Electronic Screwdriver Set (6 pcs) Chrome vanadium Chrome plated and black tip. PP handle Flat tip : 3×80–3×100–3×125–4×150 Star tip : 3×60 – 4×80			
42	Bits Screwdriver		Izeltas	Turkey	2
		Screwdriver Interchangeable Bits Set (7 Pcs)			
43	Bits Set		Izeltas	Turkey	2
		Long Type 100mm (13 Pcs) Flat tip : 0.6×4,5 – 0.8×5,5 – 1.2×6,5 Star tip : Ph1 – Ph2 – Ph3 Hexagon : Pz1 – Pz2 – Pz3 Torc Tip : T25 – T27 – T30 – T40			

No	Equipment	Explanation	Producer	Orjin	Piece
44	Nose Pliers		Izeltaş	Turkey	2
		Electronic Long Nose Pliers Set (4 Pcs) Electronic Round Nose Pliers Electronic Flat Nose Pliers Electronic Needle Nose Pliers Electronic Bent Needle Nose Pliers			
45	Cutting & Pliers Set		Izeltaş	Turkey	2
		Electronic Cutting & Pliers Set (4 Pcs) Electronic Diagonal Side Cutting Pliers Electronic and Cutting Pliers Electronic Long Nose Pliers Electronic Pliers			
46	Magnifying Lamp		Risegun	China	4
		5 Lenses with Different Zoom Features Lens Magnification Rates: 1.0X, 1.5X, 2.0X, 2.5X, 3.5X			
47	Screwdriver Torque		Izeltaş	Turkey	2
		Tamper Resistance Set (7pcs) TR10 – TR15 – TR20 – TR25 – TR27 – TR30 – TR40			
48	Magnifying Lamp		Risegun	China	4
		Material: Metal, PC. Usage: Folding magnifying lamp used for maintenance. 10-level illumination adjustment and 3-level color adjustment.	Desk lamp equipped with 10X magnifying glass.		
49	Hydraulic Lug Crimping Pliers		Tork	Korea	2
		Crimping Size: 4-70 mm ² Clamping Force: 45 Kn Clamping Type: Hexagon Opening Width: 10 mm Length: 310 mm Weight: 1.8 kg			

No	Equipment	Explanation	Producer	Orjin	Piece
50	Fiber Optic Cable Welding Machine		Signal	Taiwan	1
		Power: Input AC100-240V 50/60HZ, Output DC13.5V/4.8A Insertion Loss: 0.025dB (SM), 0.01dB(MM) 0.04dB (DS/NZDS) 5" TFT Screen: 5 inch It has a 800X480 high resolution	Provides up to 300x focus amplification. It has a 7800mAh battery. It charges in less than 4 hours and heats up approximately 200 times.		
51	Fiber Optic Cable Welding Machine Set		Signal	Taiwan	1
		Carrying Bag Fiber Cleaver Replacement Fusion Electrode cable stripping pliers, Fiber stripping pliers Allen key set ,	Fiber calibration template Strap for Carrying Bag, Charging Adapter Box for cleaning material Cleaning Brush, User guide		



No	Equipment	Manufacturer	Orjin	Piece
1	20 ft. NATO Container AMG	Alura	Turkey	1
2	Aluminum Shutters	Alura	Turkey	3
3	Hydraulic Loading System.	Alura	Turkey	1
4	Control Panel	Alura	Turkey	1
5	Grounding Reel	Mavel	Italy	1
6	Lighting	EAT	Turkey	6
10	Generator Diesel	Power	Turkey	1
11	Cable Roller	Mavel	Italy	1
12	Work Bench	Alura	Turkey	2
13	Metal Cabinet	Alura	Turkey	2
15	Clamp	izeltaş	Turkey	1
16	Pistone Compressor	Aykom	Turkey	1
17	Air Tank	Alura	Turkey	1
19	Crane	Atlas	Kore	1
20	Telescopic Ladder	KEP	Turkey	1
21	Outdoor Lighting	CSR	Turkey	6
22	Multimeters	Uni-T	Italy	2
23	Laptop	Dell	EU	1
24	Monitor	Philips	EU	1
25	Network Test Machine	Uni-T	Italy	1
33	Power Sensor	Keysight	USA	1
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!	#BAŞV!
34	Optical Fiber Tester	Uni-T	Italy	1
35	Spectrum Analyzer	Anritsu	Japan	1
36	Solder Cleaning Wire	Pros	Korea	2
37	Solder wire	Pros	Korea	2
38	Desoldering Pump	Goot	Korea	2
39	Soldering Aid Pliers.	Cnanrnanc	Korea	2
40	Solder Bag	Yayke	Turkey	2
41	Screwdriver	Izeltas	Turkey	4
42	Bits Screwdriver	Izeltas	Turkey	2
43	Bits Set	Izeltas	Turkey	2
44	Nose Pliers	Izeltaş	Turkey	2
45	Cutting & Pliers Set	Izeltaş	Turkey	2

Alura Trailer

www.aluratrailer.com

sales@aluratrailer.com

Export :+90 544 242 04 91



Date: 19.08.2025

Prj No: 23.039

Offer: 23.039

Revision: 24.00

No	Equipment	Manufacturer	Orjin	Piece
46	Magnifying Lamp	Risegun	China	4
47	Screwdriver Torque	Izeltaş	Turkey	2
48	Magnifying Lamp	Risegun	China	4
49	Hydraulic Lug Crimping Pliers	Tork	Korea	2
50	Fiber Optic Cable Welding Machine	Signal	Taiwan	1
51	Fiber Optic Cable Welding Machine Set	Signal	Taiwan	1