



Project / Model

**23.047**

**Mobile Lubrication/Tanker**

Info

MWS 2.2.1.

Date : 06.03.2024



Rev. : 00.00

Per. : Metin ALÇAR

Tel. : 0544 242 04 91

Mail : sales@aluratrailer.com

**A 01**

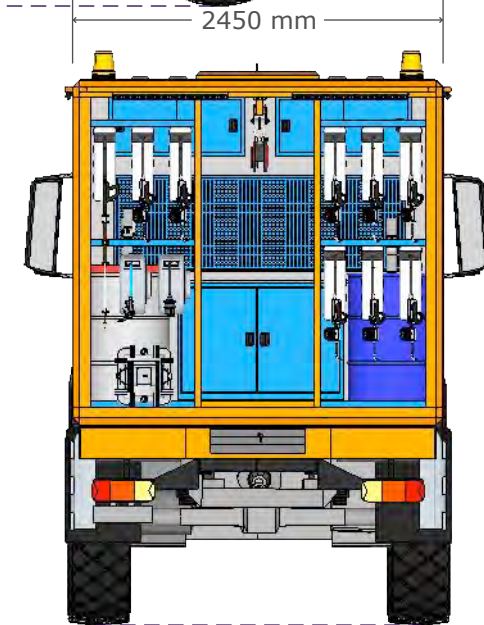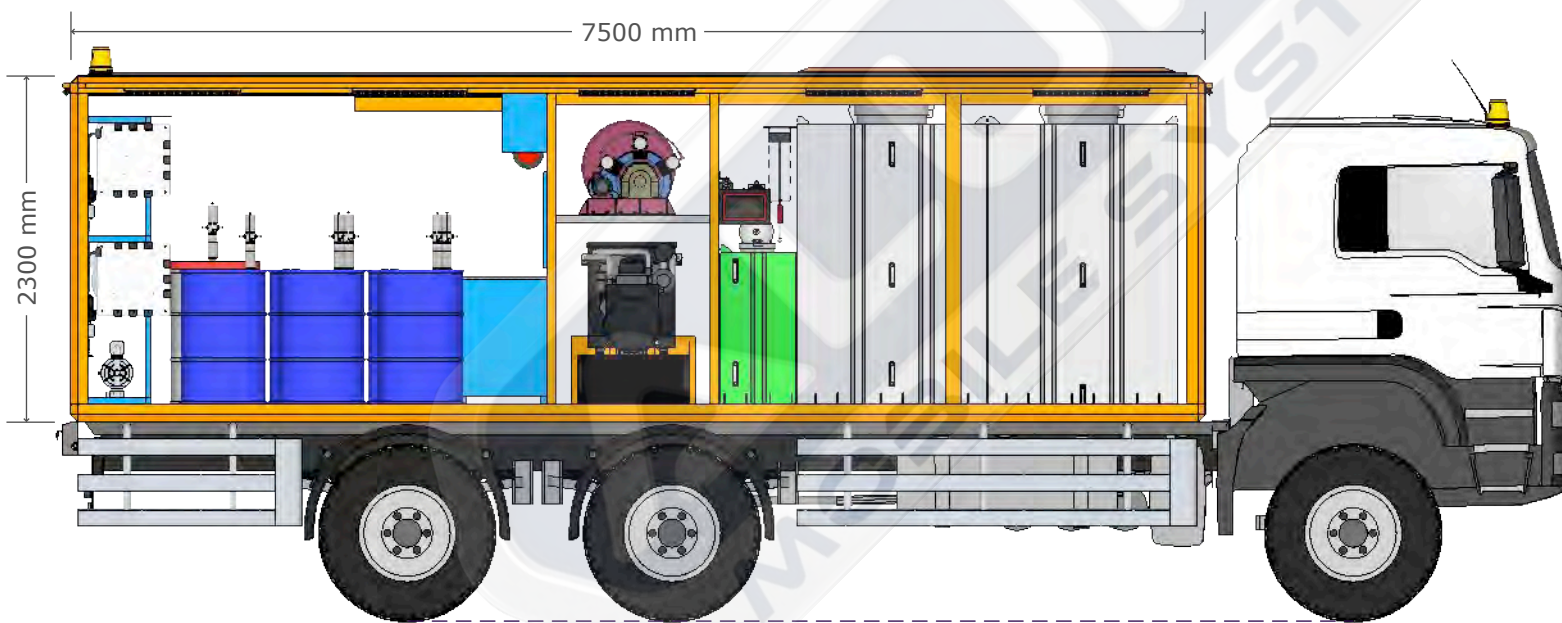

Project / Model

**23.047**

**Mobile Lubrication/Tanker**

Info

MWS 2.2.1.

Date : 06.03.2024


Rev. : 00.00

Per. : Metin ALÇAR

Tel. : 0544 242 04 91

Mail : sales@aluratrailer.com


**A 02**

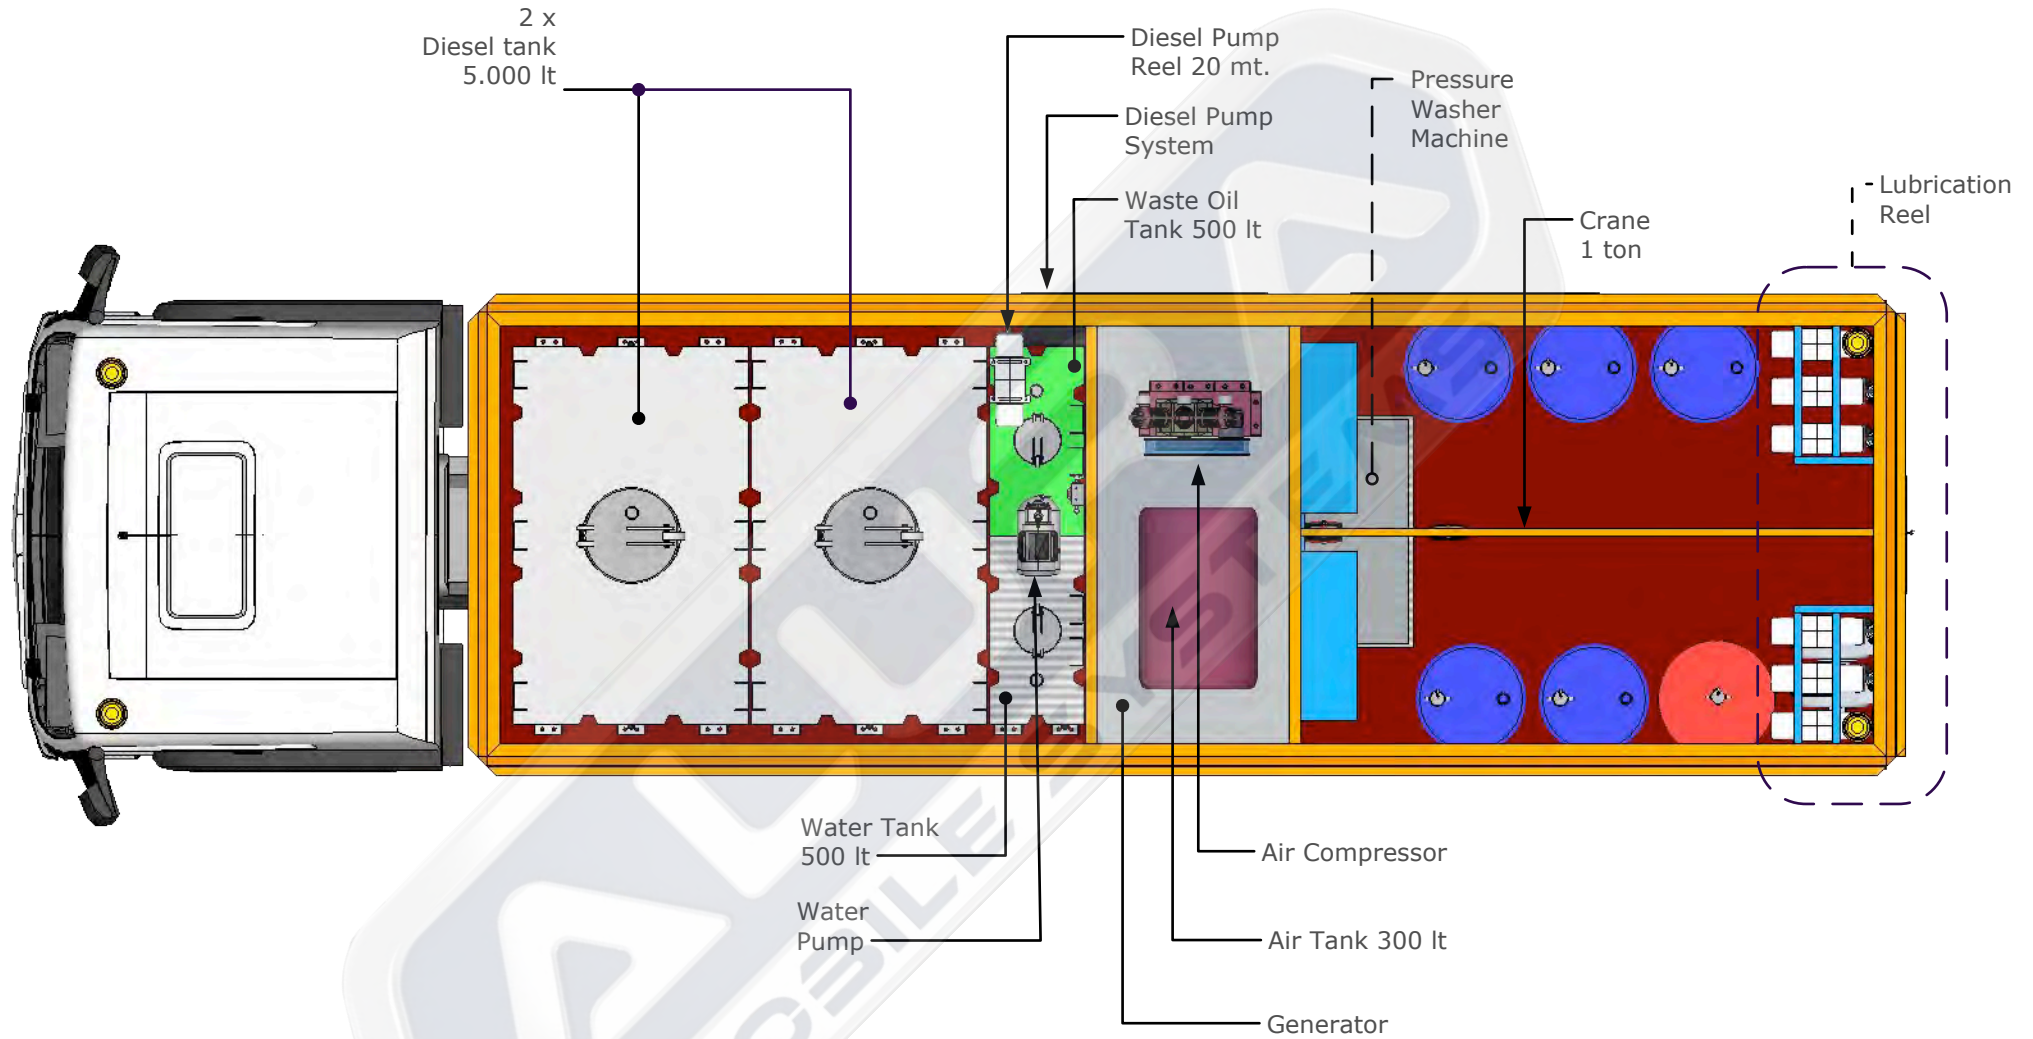








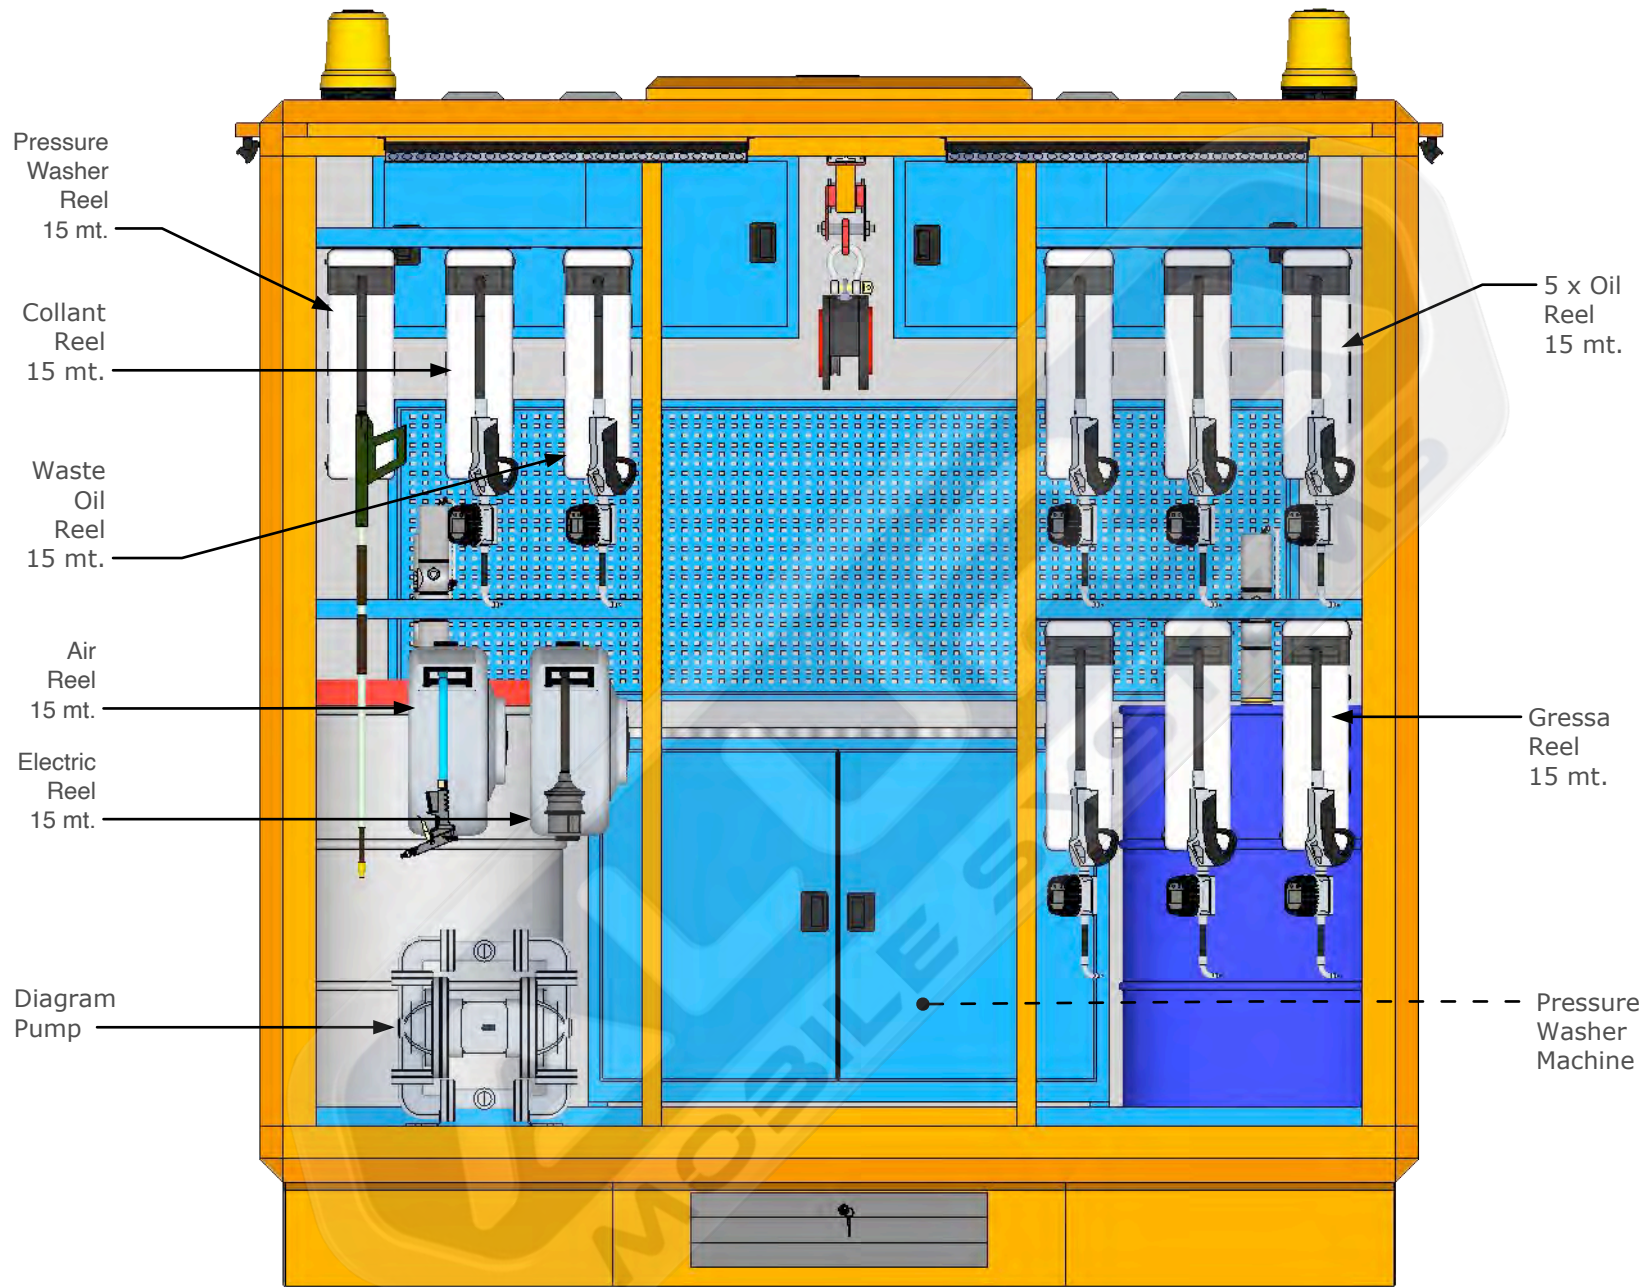

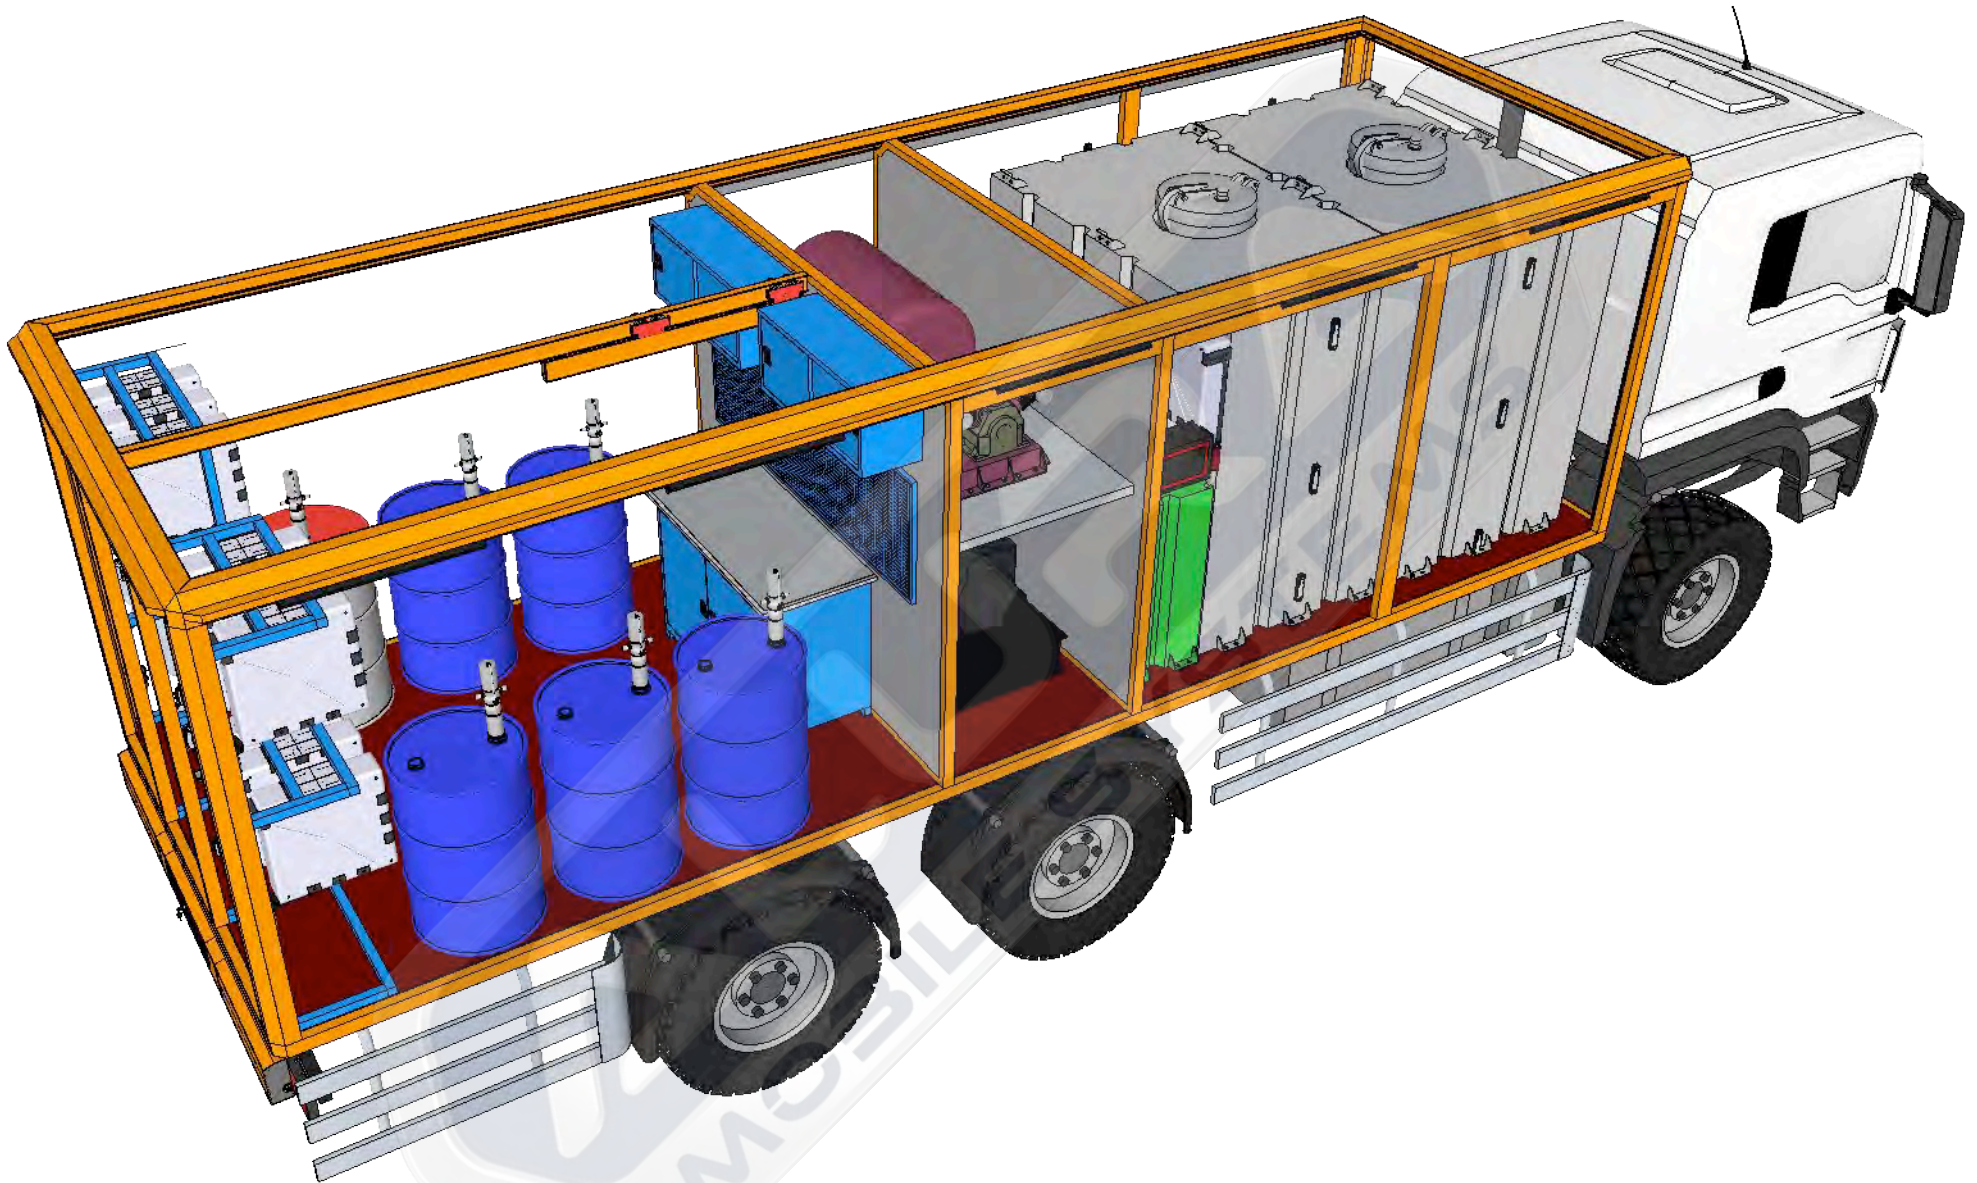


























No	Equipment	Explanation	Producer	Orjin	Piece
<b>1</b>	<b>Bodywork</b>		<b>Alura</b>	<b>Turkey</b>	<b>1</b>
		<p>MWS Insulated Body  From twisted C type channel steel.  Base traverses 80mm height 3mm  18 mm Elastomeric rubber insulation.  Floor 18mm Plywood plywood.  Sliding windows to usable areas.  Generator and compressor areas are quickly accessible cover.  Exhaust and ventilation device.  Stainless hinges and locks.  Outside transportation center control board.  Electrical cables are hidden inside the insulated chassis.</p>			<p>Outside transportation center control board.  Electrical cables are hidden inside the insulated chassis.  Quick access cover to the lubricating and washing rollers.  Monolithic crane connection channel to the body frame.  Fixed glass rear door.  Environmental and interior lighting 220v.  Acrylic industrial chassis and surface paint.  Quick-access rear bumper drawers.  Metal items are fixed to the chassis.</p>
<b>1.1</b>	<b>Aluminum Shutters</b>		<b>Alura</b>	<b>Turkey</b>	<b>8</b>
		<p>Manuel Working  Locking Systems  Size : 1000 x 2300 mm 2 pcs.  1500 x 2300 mm 4 pcs.  600 x 2300 mm 2 pcs.</p>			
<b>2</b>	<b>Generator Diesel</b>		<b>Power</b>	<b>Turkey</b>	<b>1</b>
		<p>Standby/Prime Power: 28 kVa / 25 kVa  Standard Voltage: 400/230 V / 3 Phase  Engine Bran: Cummins  Engine Model: X2.5G2  Alternator: Stamford  RPM: 1500 rpm.</p>			<p>Frequency: 50 Hz.  Water Cooling</p>
<b>4</b>	<b>Pistone Compressor AC 75</b>		<b>Atlas Copco</b>	<b>Belgium</b>	<b>1</b>
		<p>Chassis Piston Air Compressor  Engine Power: 7.5 hp  Air Intake: 836 lt/min  Revolution : 663 rpm  Pressure : 15 bar  Working Power : 380 V</p>			
<b>4</b>	<b>Air Tank</b>		<b>Alura</b>	<b>Turkey</b>	<b>1</b>
		<p>Capacity : 300 lt.  Working Pressure: 15 bar.  Test Pressure: 15 Bar.  Sheet Thickness: 4 mm.  Compressor Connection : 1"  Air Outlet : 1/2"</p>			

No	Equipment	Explanation	Producer	Orjin	Piece
7	Oil Pumps		Raasm	Italy	5
		Pneumatic pumps for oil Flow rate: 18 l / min Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE			
8	Hose Reels		Raasm	Italy	5
		Pressure: 150 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			
9	Guns for dispensing		Raasm	Italy	5
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
15	Lubrication Grease		Raasm	Italy	1
		Grease disp. kit for drums external Ratio: 50:1 Flow rate: 1500 g/min For drums with internal: ø 370/420 Compatible fluids: Greases, medium / high viscosity	Air working pressure: 6/8 bar Average air consumption: 330 l / min Noise level: 81 dB Weight: 4.6kg Grease guns Grease coupler: special 4-jaw		
16	Grease Hose Reels		Raasm	Italy	1
		Pressure : 400 bar Compatible fluids : Grease ø and hose length : 3/8 - 25 mt. Swivel joint : Zinc plated steel Seals : Polyurethane Characteristic : Fixed	Material : Painted Steel Reel flow path : Zinc Pated Steel Internal drum width : 122 mm		
17	Waste Oil / Diagram Pump		Raasm	Italy	1
		Diaphragm Pumps Flow rate: 70 l / min Max pressure: 8 bar. Max cicles for minute: 400 cpm. Max working temperature: 100 ° C Noise level: 70 dB	Air working pressure: 2/6 Bar Membranes: EPDM		

No	Equipment	Explanation	Producer	Orjin	Piece
18	Waste Oil / Hose Reel		Raasm	Italy	1
		Pressure: 20 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			
19	Waste oil transfer		Özsay	Turkey	1
		Oil collection under the vehicle Swivel Wheel Metal case Capacity : 50 lt			
20	Waste Tank		Alura	Turkey	1
		Volume: 500 lt Metal prism tank Occupancy indicator Filler caps Pump stabilizer Discharge1" valve			
21	Water Pump		Karcher	Germany	1
		Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Connection type : G1	Power Cable H05RN-F : 1 m Weight without accessories : 14.7 kg		
22	Water Hose Reel		Karcher	Germany	1
		Pressure: 20 bar. Hose Length: 20 mt Compatible fluids: Water Swivel joint: Plastic Seals: Polyurethane Characteristic: Fixed	Inlet: G 1/2 (f) Outlet: G 1/2 (g) Operating temperature -40 C / +80 C Hose Size: 1/2		
23	Water Tank		Alura	Turkey	1
		Capacity : 500 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 2" Pump stabilizer : 2 " Discharging valve : 1"			

No	Equipment	Explanation	Producer	Orjin	Piece
24	Diesel Pump		Piusu	Italy	1
		Flow rate: 50 lt/min Power: 230 VAC Suction distances: 5 m (vertical), 50 m (horizontal) Pressing distances: 30 mt (vertical), 300 mt (horizontal)	Counter : Calibration and total storage unit with six digit crystal liquid display Motor : Thermal protector, ventilated, 0.25 kW, Body : Made of steel, epoxy painted against corrosion Gun : Automatic fuel gun		
25	Diesel Hose Reel		Raasm	Italy	1
		Pressure: 20 bar. Hose: 15 mt Compatible fluids: Diesel Seals: Polyurethane Material: Painted steel Inlet - Outlet: G 1"(f) - G 1"(f)			
26	Diesel Fuel tank		Alura	Turkey	2
		Material: ST 37 Carbon Steel Capacity: 5,000 lt. Sheet Thickness: 4 mm Fuel Output: 1 inch Level indicator Manhole Covers: 600 mm	Dimensions: 2000 x 1250 x 2000 mm Chassis mounted on vehicle		
27	Cable Roller		Mavel	Italy	1
		20 Mt 5*1.5 Mm Three Phase : 220 Volt Cable Thickness: 5*1.5 Mm <sup>2</sup> Cable Length: 20 Mt Cable Type : H07RN-F Power : 1000-3000 W	Auto Rewind Plastic outer cover steel swivel wall bracket Weight: 9 Kg Dimensions: 42x39x23 Cm		
28	Air Hose Roller		Mavel	Italy	1
		Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dim.: 3/8" F - 3/8" M Automatic Rewind Plastic outer casing	Steel rotating wall brake Size: 50x43.5x23.5 cm Weight: 8.3 Kg		
29	Interior Lighting		EAT	Turkey	6
		Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Power: 28 W / 38 W / 55 W Input Voltage: 220-240V - IP 65			

No	Equipment	Explanation	Producer	Orjin	Piece
30	Outdoor Lighting		CSR	Turkey	6
		Operating Voltage / Current: DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS	White:5000-7000K Physical Properties : Polycarbonate plastic black aluminum profile		
31	Air Regulator		Osaka	Japan	1
		Air Inlet : 1/2" Filter : 20u Working Pressure: 05-9.9 atu Operating Temperature: 5-60°C Water Capacity: 80 ml Air Permeability: 2200 lt/min			
32	Air Line Connection		Osaka	Japan	1
		Polyurethane Pneumatic fittings			
33	Control panel of all equipment.		Alura	Turkey	1
		Generator / Mains power connection.			
34	Hand Tools Set		İzeltaş	Turkey	1
		Mechanical Tool Kit 43 Pieces			
35	Chain Hoist		Max Extra	Kore	1
		1 Tons 5 Meter Chain			