




No	Equipment	Referans	Producer	Orjin	Piece
1	20 ft. NATO Container AMG	23.035	Alura	Turkey	1




Dimensions / mm.	Length	6.058	Width	2.438	Height	2.591
------------------	--------	-------	-------	-------	--------	-------

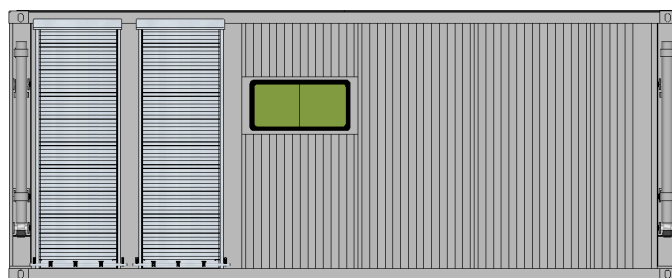





**Bodywork**

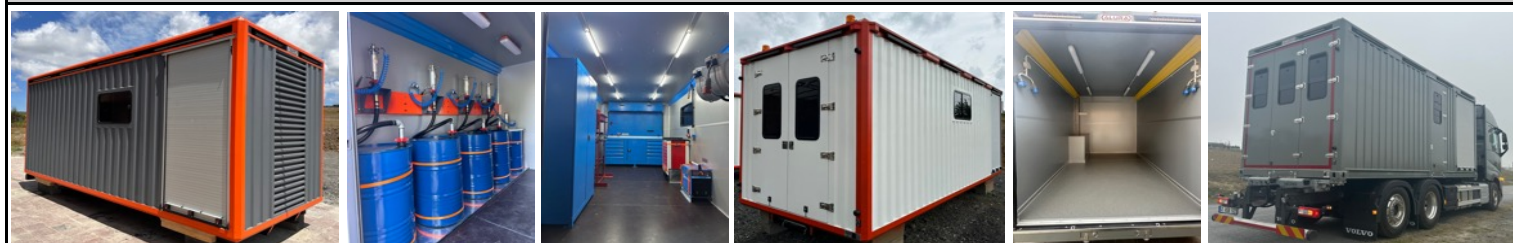













20' Dry / Standard Container  
 From twisted C type channel steel.  
 Base traverses 80mm height 3mm  
 18 mm Elastomeric rubber insulation.  
 Floor 18mm Plywood plywood.  
 Sliding windows to usable areas.  
 Generator and compressor areas are quickly accessible cover.  
 Exhaust and ventilation device.  
 Stainless hinges and locks.  
 Outside transportation center control board.  
 Electrical cables are hidden inside the insulated chassis.  
 Outside transportation center control board.  
 Electrical cables are hidden inside the insulated chassis.  
 Quick access cover to the lubricating and washing rollers.  
 Monolithic crane connection channel to the body frame.  
 Environmental and interior lighting 220v.  
 Acrylic industrial chassis and surface paint.  
 Quick-access rear bumper drawers.  
 Metal items are fixed to the chassis.  
 Center control panel.  
 Generator and compressor areas are quickly accessible cover.  
 Cables in protective plastic sheath.  
 Polyurethane hose in air line duct.  
 Mains Electricity Connection Input.  
 Perimeter and interior lighting 220 v.







**Finishing**















No	Equipment	Explanation	Producer	Orjin	Piece
2	Aluminum Shutters		Alura	Turkey	3
		Manuel Working Locking Systems Size : 1.000 x 2.300 mm 2 Pcs 2.000 x 2.300 mm 1 Pcs.			
3	Hydraulic Loading System.		Alura	Turkey	1
		Hydraulic lowering container lowering system. System power: 120 bar Working power: 220V Carrying capacity: 10 tons Control Panel			
4	Control Panel		Alura	Turkey	1
		Control of all machines. Lighting control. Compressor Pressure gauge.			
5	Grounding Reel		Mavel	Italy	1
		Cable Thickness: 1x6 mm. Cable Length: 15 Mt Cable Type: H07V - K Automatic Rewind Plastic outer casing steel swivel wall bracket	It can be easily stopped by the end user thanks to the latched stop device. CE approved Dimensions: 28 x 28 x 19 Cm Weight: 2.8 Kg		
6	Lighting		EAT	Turkey	6
		Body : Polycarbonate RAL 9003 body , Metal lock clip Diffuser: Polycarbonate opal cover Light Source: Mid Power LED Power: 28 W / 38 W / 55 W Input Voltage: 220-240V - IP 65			
7	Ventilation		Al-Fan	Turkey	2
		Dimensions: 560 x 560 mm Wing: Galvanized Current: 220 V Motor: 0.34 hp.			







No	Equipment	Explanation	Producer	Orjin	Piece
8	<b>Air Conditioning</b>		<b>Bosch</b>	<b>Germany</b>	<b>1</b>
		Cooling Capacity : 12.000 btu/s Heating Capacity : 13.000 btu/s Energy efficiency class : A++ Cooling power in watts : 1213 Indoor Unit Sound Level : 40.5 db Outdoor Unit Sound Level : 56 db		Estimated room size : 16 m2 Refrigerant : R32 Dehumidification function : Yes Weight : 7.6 kg.	
9	<b>Fire Extinguisher</b>		<b>Star</b>	<b>Turkey</b>	<b>2</b>
		ABC Grade Fire Ext. Powder 12 Kg Capacity MAP Rate 40% Body made of A1 7114 Quality Plastered Sheet		18 Bar Working Pressure 0.70 Mic.Elec. Static Paint.	
10	<b>Generator Diesel</b>		<b>Power</b>	<b>Turkey</b>	<b>1</b>
		Standby/Prime Power: 22 kVa / 23 kVa Standard Voltage: 400/230 V / 3 Phase Engine Bran: Perkins Engine Model: 1103A-33TG1 Alternator: Sincron RPM: 1500 rpm.		Frequency: 50 Hz. Water Cooling	
11	<b>Cable Roller</b>		<b>Mavel</b>	<b>Italy</b>	<b>1</b>
		20 Mt 5*1.5 Mm Three Phase : 220 Volt Cable Thickness: 5*1.5 Mm2 Cable Length: 20 Mt Cable Type : H07RN-F Power : 1000-3000 W		Auto Rewind Plastic outer cover steel swivel wall bracket Weight: 9 Kg Dimensions: 42x39x23 Cm	
12	<b>Work Bench</b>		<b>Alura</b>	<b>Turkey</b>	<b>1</b>
		Work Bench Width: 1.800 mm Depth: 700 mm Height: 2.000 mm Number of Drawers: 10 Drawer Carrying Capacity: 60 kg.		Shelf Carrying Cap .: 80 kg. Socket 2 Pieces 25 mm MDF + Pvc on worktops Electrostatic powder paint Suspension boards modular	
13	<b>Cabinet</b>		<b>Alura</b>	<b>Turkey</b>	<b>1</b>
		Material Cabinet Width: 920 mm Depth: 450 mm Height: 2.000 mm			


No	Equipment	Explanation	Producer	Orjin	Piece
14	Cabinet		Alura	Turkey	1
		Galvanized shelves and uprights. Width: 750 mm Depth: 600 mm Height: 2.000 mm Drawer: 5 pcs.			
15	Clamp		İzeltaş	Turkey	1
		Cast Body Leveler's Vise : 100 Mm Jaw Spacing : 100 mm Mouth Width: 125 Mm			
16	Table Top Column Drill		Foreman	Kore	1
		Drilling Capacity mm 16 Pinole Diameter: 40 mm Pinole Movement:50 mm Spindle Column Distance: 115 mm Spindle Nose B16 Spindle Speeds: 400-2500 rpm	Number of Spindle Speeds 9 Table Size: 170x175 mm Spindle Table Distance: 245 mm Spindle Base Distance: 330 mm Motor: 500W / 220V Weight: 22 Kg		
17	Grinding Machine		Workman	Taiwan	1
		Grinding Diameter: 200 mm Horsepower: 0.75 HP Voltage: 230 Volts. Speed: 3,000 rpm.			
18	Pistone Compressor		Aykom	Turkey	1
		Chassis Piston Air Compressor Engine Power: 5.5 hp Air Intake: 630 lt/min Revolution : 950 rpm Pressure : 12 bar Working Power : 380 V			
19	Air Tank		Alura	Turkey	1
		Capacity : 300 lt. Working Pressure: 15 bar. Test Pressure: 15 Bar. Sheet Thickness: 4 mm. Compressor Connection : 1" Air Outlet : 1/2"			







No	Equipment	Explanation	Producer	Orjin	Piece
20	Air Reel		Mavel	Italy	1
		Hose Diameter: 10x15 Mm Hose Length: 20 Mt Working Pressure: 15 Bar Inlet and Outlet Dimension: 3/8" F - 3/8" M Automatic Rewind	Plastic outer casing steel swivel wall bracket It can be easily stopped by the end user thanks to the latched stop device. Size: 50x43.5x23.5 cm Weight: 8.3 Kg		
21	Water Tank		Alura	Turkey	1
		Capacity : 500 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 2" Pump stabilizer : 2 " Discharging valve : 1"			
22	Water Pump		Karcher	Germany	1
		Maximum Motor power : 1000 W Maximum Water Flow: 4500 l/hour Maximum pressure: 50/5 m/bar Working pattern: 1.9 - 3 bar Maximum suction : 8 m Connection type : G1	Power Cable H05RN-F : 1 m Weight without accessories : 14.7 kg		
23	Water Hose Reel		Karcher	Germany	1
		Pressure: 20 bar. Compatible fluids: Water Swivel joint: Stainless Metal Seals: Polyurethane Characteristic: Fixed Inlet: G 1/2 " (f)	Outlet: G 1/2 "(g) Operating temperature -40 C / +80 C Size: 1/2 " Pressure: 10 bar Length: 20 mt		
24	Cold Washing Machine		Alura	Turkey	1
		Pressure: 200 bar Flow rate: 900 lt/hour Engine Power: 7.5 hp Voltage - Phase 380V-3 50 Hz Weight: 74 Spray gun			
25	Washing Hose Reels		Alura	Turkey	1
		Pressure: 400 bar. Hose Length: 15 mt. Compatible fluids: Water Swivel joint: Stainless Metal Characteristic: Fixed Material: Painted steel			





No	Equipment	Explanation	Producer	Orjin	Piece
26	Oil Pumps		Raasm	Italy	1
		Pneumatic pumps for oil Flow rate: 18 l / min Air working pressure: 6/8 bar Average air consumption: 230 l / min Noise level: 81 dB Oil viscosity: 80 SAE			
27	Hose Reels		Raasm	Italy	1
		Pressure: 150 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 "f - G 1/2 "m Pressure - Size: 1/2 " - 160 bar			
28	Guns for dispensing		Raasm	Italy	1
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
29	Oil Tank		Alura	Turkey	1
		Capacity : 200 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 2" Pump stabilizer : 2 " Discharging valve : 1"			
30	Antifreeze Pump		Raasm	Italy	1
		Pneumatic pumps for Antifreeze Flow rate: 30 l / min Air inlet - Fluid Out : G 1/4 - G 1/2 Air working pressure: 6/8 bar Average air consumption: 370 l / min	Noise level: 81 dB Weight : 7,4 kg		
31	Antifreeze Hose Reels		Raasm	Italy	1
		Pressure: 150 bar Hose Length: 15 mt Compatible fluids: Antifreeze Material: Painted Steel Inlet-Outlet : G 1/2 "f - G 1/2 "m Operating temperature: -40 / +100	Pressure - Size: 1/2 " - 160 bar		

No	Equipment	Explanation	Producer	Orjin	Piece
32	Guns for dispensing		Raasm	Italy	1
		Flu: Technopolymer Digital meter: Yes Inlet swivel joint: G 1/2 f Filter: Yes Level locking button: Yes			
33	Antifreeze Tank		Alura	Turkey	1
		Capacity : 200 Ltr Made of Stainless : 2 mm Level Indicator : Manuel Filling tap : 2" Pump stabilizer : 2 " Discharging valve : 1"			
34	Waste Oil / Diagram Pump		Raasm	Italy	1
		Diaphragm Pumps Flow rate: 70 l / min Max pressure: 8 bar. Max cycles for minute: 400 cpm. Max working temperature: 100 ° C Noise level: 70 dB	Air working pressure: 2/6 Bar Membranes: EPDM		
35	Waste Oil / Hose Reel		Raasm	Italy	1
		Pressure: 20 bar Length: 15 mt Compatible fluids: Oils and Similar Material: Painted Steel Inlet-Outlet : G 1/2 ""f - G 1/2 ""m Pressure - Size: 1/2 "" - 160 bar			
36	Waste Tank		Alura	Turkey	1
		Volume: 200 lt Metal prism tank Occupancy indicator Filler caps Pump stabilizer Discharge1" valve			
37	Crane		Atlas	Kore	1
		Capacity: 600 / 1.200 kg Lifting height: 10 mt Lifting speed: 10/5 m / min Rope length: 20 mt Engine power: 930 W Voltage: 220-50 V / Hz			

No	Equipment	Explanation	Producer	Orjin	Piece
38	<b>Welding Machine MAG / MIG / TIG</b>		<b>Telwin</b>	<b>Italy</b>	<b>1</b>
		Mains Voltage: 230 V Mains Fuse: 16 A Power Drawn: 2.2 / 5 Kw Idle Operating Voltage: 78 V Current Adjustment Range: 20 - 220 A Rated Current: 180 A - 20%		Electrode Diameter: 0.6 - 1.0 mm Protection Class: IP 23 Machine Dimension: 620 x 260 x 490 mm Weight: 22 kg	
39	<b>Telescopic Ladder</b>		<b>KEP</b>	<b>Turkey</b>	<b>1</b>
		9 Steps 2.6 Mt Maximum User Weight: 150kg High Quality Aluminum construction with Premium Aluminum Alloy makes this telescopic ladder much safer.			
40	<b>Outdoor Lighting</b>		<b>CSR</b>	<b>Turkey</b>	<b>6</b>
		Operating Voltage / Current: DC 12/15V 1.4A Driving Type: Linear current and voltage controlled driver Light Source: 3W 12pcs power LED LENS Feature: 25° collimator LENS		White:5000-7000K Physical Properties : Polycarbonate plastic black aluminum profile	
41	<b>Car Fault Tester Diagnostic</b>		<b>Autel</b>	<b>China</b>	<b>1</b>
		Operating System: Android 11. Processor: 1.8GHz Quad Core. Memory: 4GB RAM / 64GB Internal Display: 8 inch LED capacitive touchscreen, 1280 x 800 resolution. Battery: 7700mAh 3.7V lit.-polymer.		Connectivity: Wi-Fi (802.11 a/b/g/n), Mini USB 2.0, Micro SD Card. Camera: 8 Megapixels on the back. Operating Temperature: 0 to 50 °C Storage Temperature: -10 to 60 °C Mode No : MX900	
42	<b>Hydraulic Hose Crimping Manuel</b>		<b>Himpo</b>	<b>Turkey</b>	<b>1</b>
		Crimping hose sizes from 4 / 30 mm. 8 legs. Used for manually crimping the sheet metal capsules of low-pressure flexible hoses.		Suitable for vehicle air conditioning hoses and washing machine hoses, welding machine torch and shoe crimping, sprayer hoses, plumbing, and fire hose manufacturers.	
43	<b>Hose Accessory Stand</b>		<b>Alura</b>	<b>Turkey</b>	<b>1</b>
		Width: 1000 mm Depth: 400 mm Height: 1800 mm Color: RAL 5015 powder coated Single-sided, fixed tool stand with 63 boxes			

No	Equipment	Explanation	Producer	Orjin	Piece
44	<b>Car Fault Tester Diagnostic</b>		<b>WorlForce</b>	<b>Germany</b>	<b>1</b>
		Hydraulic Bottle Jack Capacity: 10 Tons Extension Height: 200 mm Reinforced Height: 405 mm Model No: 11556			
45	<b>Battery Start Machine</b>		<b>Telwin</b>	<b>Italy</b>	<b>1</b>
		Mains Voltage: 220-240 V Strength: 1100 - 2300 Charging/Starter Voltage: 12 / 24 V Charging Current: 80 / 40 Charging Rated Current: 150	Machine Dimension: 200 x 260 x 340 mm Weight: 6 kg Model No : TW807590		
46	<b>Air Grinding Set</b>		<b>Osaka</b>	<b>Tiawan</b>	<b>1</b>
		Collet Diameter: 6 mm Chip Diameter: 38.00 mm Idle Speed: 22,000 rpm Air Inlet Nipple: 1/4" Air Consumption: 185 l/min Length: 170 mm	1 Opt 127 Die Grinder 1 1/8 Collet 1 1/4 Collet 10 Mounted Grinding Wheels and Sandpaper 1 Plastic Bag Model No: OPT4		
47	<b>Hand Grinding Machine (Batteries)</b>		<b>Bosch</b>	<b>Germany</b>	<b>1</b>
		Battery voltage: 18 Volts Battery capacity: 4 Amps Idle speed: 11,000 rpm Wheel diameter: 125 mm Weight excluding battery: 1.6 kg Brushless motor: 800 W	2 GBA 18V 4 Amp Batteries 1 GAL 18V-40 Professional Fast Charger 1 Connection Flange - Clamping Nut 1 Grinding Wrench - Additional Handle 1 Protective Cover - 1 Tool Kit Model No: GWS 180-Li		
48	<b>Hand Drill (Batteries)</b>		<b>Bosch</b>	<b>Germany</b>	<b>1</b>
		Battery Voltage: 18.0 Volts Torque: 84/100/150 Nm Idle Speed: 0-550 / 0-2,200 RPM Battery Type: Lithium-Ion Chuck Dia. Min./Max.: 1.5 / 13 mm Torque Steps: 25+1	Drilling Diameter in Wood, Max.: 150 mm Drilling Diameter in Steel, Max.: 16 mm Screw Diameter, Max.: 13 mm Battery Capacity: 8 amps Weight (excluding battery): 2.1 kg Model No : GSR 18V-150		
49	<b>Drill Bit</b>		<b>Bosch</b>	<b>Germany</b>	<b>1</b>
		M6 - M 16 Drilling Set 18 pièces			

No	Equipment	Explanation	Producer	Orjin	Piece
50	Battery 18V		Bosch	Germany	2
		Battery Voltage: 18 Volts Battery Capacity: 5.0 Ah Weight: 620 Gr COOLPACK for up to 100% longer battery life. Model No : 1600A002U5			
51	Adjustable Wrenches		İzeltaş	Turkey	1
		Chrome vanadium, chrome-plated, PVC insulated Plier mouth: 40 mm Length: 315 mm Length (inches): 12 1/2" Weight: 530 g			
52	T Allen Key Set		İzeltaş	Turkey	1
		Allen Key Set: 8 Pieces Sizes: 2.5 – 3 – 4 – 5 – 6 – 7 – 8 – 10			
53	Combination Wrench		İzeltaş	Turkey	1
		Chrome vanadium, Chrome plated Technical Contents 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 21 - 22 - 24 mm 15 pieces. Model No : 2115			
54	Wrench Set		İzeltaş	Turkey	1
		Fork Double Wrench Set 6x7 – 8x9 – 10x11 – 12x13 – 14x15 – 16x17 – 18x19 – 20x22 – 21x23 – 24x26 – 25x28 – 30x32 mm.			
55	Combination Wrench		İzeltaş	Turkey	1
		Combination Wrench With Ratchet Set 6 – 7 – 8 – 9 – 10 – 11 – 12 – 13 – 14 – 15 – 16 – 17 – 18 – 19 – 20 – 21 – 22 – 24 – 27 – 30 – 32 mm.			

No	Equipment	Explanation	Producer	Orjin	Piece
56	1/2" Twelve Corner Socket Wrench Set 24 pcs		İzeltaş	Turkey	1
		1/2" Twelve Corner Socket Wrench: 10.11.12.13.14.15.16.17.18.19.21.22.2 3.24.26.27.28.30.32 1/2" Ratchet Handle: 250 mm 1/2" Joint: 70 mm 1/2" T Handle Adapter	1/2" Intermediate Arm: 125 – 250 mm		
57	Tubular Socket		İzeltaş	Turkey	1
		Single Ended Tubular Socket Wrench Set with Handle Bar. 6x7 – 8x9 – 10x11 – 12x13 – 14x15 – 16x17 – 18x19 – 20x22 Mil 5x125 – 8x180 mm			
58	Ratchet Torque Wrench		İzeltaş	Turkey	1
		1/2" socket square Tightening range: 40 - 200 Nm Weight: 1,590 g Model No: 4020			
59	Pliers Side Cutter Set		İzeltaş	Turkey	1
		Electronics Side Cutter Electronics Peak Chisel Electronics Long Nose Pliers Electronics Pliers			



No	Equipment	Manufacturer	Orjin	Piece
1	20 ft. NATO Container AMG	Alura	Turkey	1
2	Aluminum Shutters	Alura	Turkey	3
3	Hydraulic Loading System.	Alura	Turkey	1
4	Control Panel	Alura	Turkey	1
5	Grounding Reel	Mavel	Italy	1
6	Lighting	EAT	Turkey	6
7	Ventilation	Al-Fan	Turkey	2
8	Air Conditioning	Bosch	Germany	1
9	Fire Extinguisher	Star	Turkey	2
10	Generator Diesel	Power	Turkey	1
11	Cable Roller	Mavel	Italy	1
12	Work Bench	Alura	Turkey	1
13	Cabinet	Alura	Turkey	1
14	Cabinet	Alura	Turkey	1
15	Clamp	izeltaş	Turkey	1
16	Table Top Column Drill	Foreman	Kore	1
17	Grinding Machine	Workman	Taiwan	1
18	Pistone Compressor	Aykom	Turkey	1
19	Air Tank	Alura	Turkey	1
20	Air Reel	Mavel	Italy	1
21	Water Tank	Alura	Turkey	1
22	Water Pump	Karcher	Germany	1
23	Water Hose Reel	Karcher	Germany	1
24	Cold Washing Machine	Alura	Turkey	1
25	Washing Hose Reels	Alura	Turkey	1
26	Oil Pumps	Raasm	Italy	1
27	Hose Reels	Raasm	Italy	1
28	Guns for dispensing	Raasm	Italy	1
29	Oil Tank	Alura	Turkey	1
30	Antifreeze Pump	Raasm	Italy	1
31	Antifreeze Hose Reels	Raasm	Italy	1
32	Guns for dispensing	Raasm	Italy	1
33	Antifreeze Tank	Alura	Turkey	1
34	Waste Oil / Diagram Pump	Raasm	Italy	1
35	Waste Oil / Hose Reel	Raasm	Italy	1
36	Waste Tank	Alura	Turkey	1
37	Crane	Atlas	Kore	1
38	Welding Machine MAG / MIG / TIG	Telwin	Italy	1
39	Telescopic Ladder	KEP	Turkey	1
40	Outdoor Lighting	CSR	Turkey	6
41	Car Fault Tester Diagnostic	Autel	China	1
42	Hydraulic Hose Crimping Manuel	Himpo	Turkey	1



No	Equipment	Manufacturer	Orjin	Piece
45	Hose Accessory Stand	Alura	Turkey	1
44	Car Fault Tester Diagnostic	WorlForce	Germany	1
45	Battery Start Machine	Telwin	Italy	1
46	Air Grinding Set	Osaka	Tiawan	1
47	Hand Grinding Machine (Batteries)	Bosch	Germany	1
48	Hand Drill (Batteries)	Bosch	Germany	1
49	Drill Bit	Bosch	Germany	1
50	Battery 18V	Bosch	Germany	2
51	Adjustable Wrenches	İzeltaş	Turkey	1
52	T Allen Key Set	İzeltaş	Turkey	1
53	Combination Wrench	İzeltaş	Turkey	1
54	Wrench Set	İzeltaş	Turkey	1
55	Combination Wrench	İzeltaş	Turkey	1
56	1/2" Twelve Corner Socket Wrench Set 24 pcs	İzeltaş	Turkey	1
57	Tubular Socket	İzeltaş	Turkey	1
58	Ratchet Torque Wrench	İzeltaş	Turkey	1
59	Pliers Side Cutter Set	İzeltaş	Turkey	1